



广州市亮星电子灯光设备厂

Guangzhou Lightstar Electronic Lighting Equipment Factory



广州市亮星电子灯光设备厂

Guangzhou Lightstar Electronic Lighting Equipment Factory

地址: 中国 广东 广州市天河区 龙洞迎龙大道234号龙山工业园E1栋2层
 电话: 86 020 87022418
 传真: 86 020 87023011
 移动电话: 13602863513
 公司主页: <http://www.lightskystar.com>
<http://www.lightskystar.cn.alibaba.com/>
 公司邮箱: 623872311@qq.com
 vinca2004@126.com
 MSN: lightskystar@hotmail.com
 Skype: lightskystar
 QQ: 623872311 或 1725113820

Add: 2F., Building E-1, LongShan Industry Park, Yinglong RD.,
 Longdong, Tianhe District, Guangzhou China.

Web site: <http://www.lightskystar.com>

<http://www.lightskystar.cn.alibaba.com>

Email: vinca2004@126.com

MSN: lightskystar@hotmail.com

Skype: lightskystar

QQ: 1725113820

Tel: 8620-87022418

Fax: 8620-87023011

cellphone: +86 13609702481(Niki)

18R Standard Beam Moving Head Lights-high light

SR-380


◎技术参数:

灯 泡 18R 380W
功 耗: 100V-230V 50HZ 480VA
光学器件: 高效率镜头组, 变焦0° 至 2°
电子聚焦: 20米处, 17000LUX
通道模式: 16个两种国际标准DMX512通道
水平扫描: 540° (16bit精度扫描)
垂直扫描: 280° (16bit精度扫描)
色 片 盘: 14个色片+白光,
带双向旋转的彩虹效果
旋转图案盘: 13个图案片+白圆,
带图案抖动和图案任意定位功能
棱 镜 盘: 两个可旋转棱镜, 一个圆形48棱镜,
一个16棱镜, 可叠加。可正反方向
旋转, 并具有棱镜定位功能。
频 闪: 双侧刀频闪频率最高可以13次每秒,
并可选择随机频闪及脉冲频闪
调 光: 0%~100%线性调光
雾 化: 0%~100%线性雾化
电子整流器: 使产品重量更轻, 亮度更强,
灯泡更稳定, 更环保, 更节能
开关电源: AC100~240V, 50/60HZ
灯体尺寸: 长400×宽320×高650 (mm)
包装尺寸: 长470×宽450×高680 (mm)
净 重: 21公斤
毛 重: 24公斤

◎ TECHNICAL PARAMETER:

BULB: OSRAM 18R 380W
POWER CONSUMPTION: 100V-230 V 50 HZ 480 VA
OPTICAL DEVICE: high efficiency lens group, 0° -2° zoom
ELECTRONIC FOCUS: 20 meters, 170000 LUX
CHANNEL MODE: 16 standard DMX512 channel
LEVEL SCANNING: 540(16 bit precision scan)
VERTICAL SCAN: 280(16 bit precision scan)
COLOR WHEEL: 14color and white light
with two-way rotating and rainbow effect
ROTATING GOBO WHEEL: 13 gobos and white circle
with design jitter and arbitrary positioning function
PRISM: two prism, 48-facet circular prism , 16-facet linear
prism , with superposition, positive and negative
rotation and prism location function.
SHUT: Double pole shut up to 13 times per second,
random shut and pulse shut can be choosed
DIMMER: 0% ~ 100% linear dimmer
FROST: 0% ~ 100% linear frost
Electronic ballast : make the product more light and bright.
Lamp more stable environmental protection and
more energy saving
SWITCHING POWER SUPPLY : AC100 ~ 240 V, 50/60 HZ
FIXTURE DIMENSION: L400×W320×H650(mm)
PACKING DIMENSION: L470×W450×H680(mm)
NET WEIGHT: 21KG
GROSS WEIGHT: 24KG

>>光效图

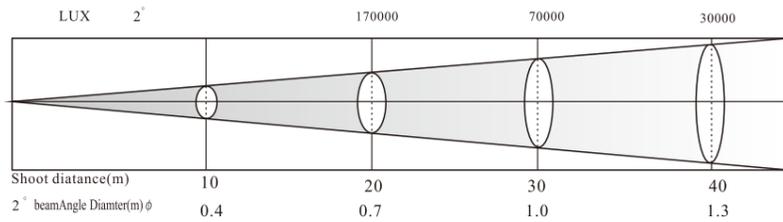

Beam Moving Head Lights SR-230MINI


◎技术参数:

灯 泡: 7R 230W
功 耗: 230V 50HZ 350VA
光学器件: 3片透镜式镜头组, 变焦0° 至 3°
电子聚焦: 20米处, 55000LUX
通道模式: 16个国际标准DMX512通道
水平扫描: 540° (16bit精度扫描)
垂直扫描: 280° (16bit精度扫描)
色 片 盘: 12个色片+白光,
带双向旋转的彩虹效果
旋转图案盘: 15个图案片+白圆,
带图案抖动和图案任意定位功能
棱 镜 盘: 8棱镜, 可正反方向旋转,
并具有棱镜定位功能
频 闪: 双侧刀频闪频率最高可以13次
每秒, 并可选择随机频闪及脉冲频闪
调 光: 0%~100%线性调光
雾 化: 0%~100%线性雾化
电子整流器: 使产品重量更轻, 亮度更强,
灯泡更稳定, 更环保, 更节能
开关电源: AC100~240V, 50/60HZ
灯体尺寸: 长365×宽250×高420 (mm)
包装尺寸: 长415×宽345×高440 (mm)
净 重: 10.5公斤
毛 重: 11.5公斤

◎ TECHNICAL PARAMETER:

BULB: 7 R 230W
POWER CONSUMPTION: 230 V 50 HZ 350 VA
OPTICAL DEVICE: three lens group, 0-3° zoom
ELECTRONIC FOCUS: 20 meters, 55000 LUX
CHANNEL MODE: 16 international standard DMX512 channel
LEVEL SCANNING: 540(16 bit precision scan)
VERTICAL SCAN: 280(16 bit precision scan)
COLOR WHEEL: 12 color and white light with two-way
rotating and rainbow effect
ROTATING GOBO WHEEL: 15 gobos and white circle with
design jitter and arbitrary positioning function
PRISM: 8 prisms with positive and negative rotation
and prism location function.
SHUT: Double pole shut up to 13 times per second,
random shut and pulse shut can be choosed
DIMMER: 0% ~ 100% linear dimmer
FROST: 0% ~ 100% linear frost
Electronic ballast : make the product more light and bright.
Lamp more stable environmental protection
and more energy saving
SWITCHING POWER SUPPLY : AC100 ~ 240 V, 50/60 HZ
FIXTURE DIMENSION: L365×W250×H420(mm)
PACKING DIMENSION: L415×W345×H440(mm)
NET WEIGHT: 10.5KG
GROSS WEIGHT: 11.5KG

>>光效图

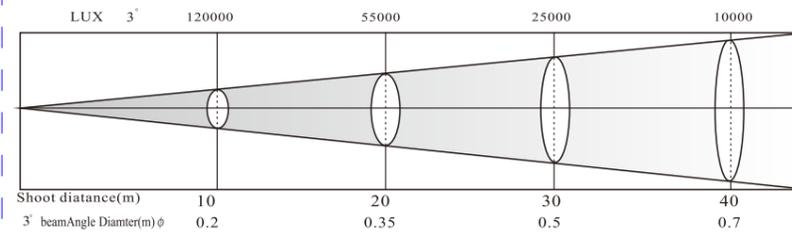

SR-380 DMX Channel Control

CH1 Pan	0° to 255°
CH2 Tilt	0° to 255°
CH3 Pan Fine	0° to 3.6°
CH4 Tilt Fine	0° to 3°
Ch5 X/Y Speed	0 to 255
Ch6 Atomization	0 to 255
Ch7 Strobe	0 to 255
Ch8 Dimmer	0 to 255
Ch9 Color	0 to 255
Ch10 Color	0 to 255
Ch11 GOBO	0 to 255
Ch12 GOBO shake	0 to 255
Ch13 Focus	0 to 255
Ch14 Prism1	0 to 255
Ch15 Prism2	0 to 255
Ch16 Reset	100-105 (Turn on the lamp), 200-205 (Turn off the lamp after 1 minute), 255 (Later 2s System Reset)

SR-230MINI DMX Channel Control

CH1 Pan	0° to 255°
CH2 Tilt	0° to 255°
CH3 Pan Fine	0° to 3.6°
CH4 Tilt Fine	0° to 3°
Ch5 X/Y Speed	0 to 255
Ch6	0 to 255
Ch7 Strobe	0 to 255
Ch8 Dimmer	0 to 255
Ch9 Color	0 to 255
Ch10 Color	0 to 255
Ch11 GOBO	0 to 255
Ch12 GOBO shake	0 to 255
Ch13 Focus	0 to 255
Ch14 Prism	0 to 255
Ch15 Prism Automatic	0-127 (Fast speed), 128-192 (Low speed), 193-255 (Fast speed)
Ch16 Reset	100-105 (Turn on the lamp), 200-205 (Turn off the lamp after 1 minute), 255 (Later 2s System Reset)

THUNDER-100 LED光束摇头灯



◎ 技术参数:

额定电压: AC90-240V, 50/60Hz
光源: 100瓦 LED 白光
额定功率: 180W
使用寿命: 50,000小时
净重: 12.5公斤
毛重: 15公斤
灯体尺寸: 长320×宽220×高495(mm)
包装尺寸: 长385×宽320×高535(mm)

◎ 性能特点:

光斑角度: 2°
颜色轮: 12个颜色片+白光, 半色效果, 可做双向变速彩虹效果。
图案: 固定图案轮: 13个可更换图案片+白光, 可做双向变速效果。
棱镜: 两个棱镜, 双向旋转, 速度可调, 六色效果盘
调焦: 线性调焦
雾化: 0%-100%可调
调光: 0-100%线性调光
频闪: 0.5-20次/秒, 速度可调
旋转角度: 水平540°, 垂直270° (自动回位纠错功能, 具有16bit精度调节)
控制: 国际标准DMX512信号, 3芯接口
通道: 16CH
显示: 触摸显示屏, 显示可选倒置
防护等级: IP20, 内置过热和触发高压保护, LED 温度显示

◎ TECHNICAL PARAMETER:

VOLTAGE: AC90- 240V 50/60Hz
LIGHT SOURCE: 100W LED
POWER CONSUMPTION: 180W
NET WEIGHT: 12.5KG
GROSS WEIGHT: 15KG
FIXTURE DIMENSION: L320×W220×H495(mm)
PACKING DIMENSION: L385×W320×H535(mm)

◎ PERFORMANCE FEATURE:

BEAM ANGLE: 2°
1 COLOR WHEEL: 12 colors+open, half color effect, bi-directional rainbow effect at variable speed
1 FIX GOBO WHEEL: 13 fix gobos+open, bi-directionally rotating at variable speed
1 PRISM WHEEL: 2 prism, bi-directionally rotating, at variable speed, 6 color wheel.
FOCUS: Linearly adjustable
DIMMER: 0~100% linearly adjustable
WASH: 0~100% adjustable
STROBE: 0.5~20 flash per second, speed adjustable
PAN AND TILT: Smooth, automatic Pan & Tilt position correction, speed adjustable
RANGE: Pan-540°, Tilt-270°
CONTROL PROTOCOL: DMX 512, 3 pin interface
CHANNELS: 16CH
DISPLAY: Touch screen, the words can be upside down
PROTECT GRADE: IP20, overheating & overvoltage protection

◎ 技术参数:

额定电压: AC90-240V, 50/60Hz
光源: 60瓦 LED 白光
额定功率: 120W
使用寿命: 50,000小时
净重: 3.5公斤
毛重: 5公斤
灯体尺寸: 长150×宽200×高300(mm)
包装尺寸: 长240×宽300×高380(mm)

◎ 性能特点:

光斑角度: 16°
颜色轮: 7个颜色片+白光, 半色效果, 可做双向变速彩虹效果。
图案: 固定图案轮: 7个可更换图案片+白光, 可做双向变速效果。
调焦: 手动调焦
调光: 0-100%线性调光
频闪: 0.5-20次/秒, 速度可调
旋转角度: 水平540°, 垂直270° (自动回位纠错功能, 具有16bit精度调节)
控制: 国际标准DMX512信号, 3芯接口
通道: 9/11CH
显示: 触摸显示屏, 显示可选倒置
防护等级: IP20, 内置过热保护。

◎ TECHNICAL PARAMETER:

VOLTAGE: AC90- 240V 50/60Hz
LIGHT SOURCE: 60W LED
POWER CONSUMPTION: 120W
NET WEIGHT: 3.5KG
GROSS WEIGHT: 5KG
FIXTURE DIMENSION: L150×W200×H300(mm)
PACKING DIMENSION: L240×W300×H380(mm)



◎ PERFORMANCE FEATURE:

BEAM ANGLE: 16°
1 COLOR WHEEL: 7 colors+open, half color effect, bi-directional rainbow effect at variable speed
1 FIX GOBO WHEEL: 7 fix gobos+open, bi-directionally rotating at variable speed
FOCUS: manual adjustable
DIMMER: 0~100% linearly adjustable
STROBE: 0.5~20 flash per second, speed adjustable
PAN AND TILT: Smooth, automatic Pan & Tilt position correction, speed adjustable
RANGE: Pan-540°, Tilt-270°
CONTROL PROTOCOL: DMX 512, 3 pin interface
CHANNELS: 9/11CH
DISPLAY: Touch screen, the words can be upside down
PROTECT GRADE: IP20, overheating protection



THUNDER-60M LED摇头灯



>>光效图

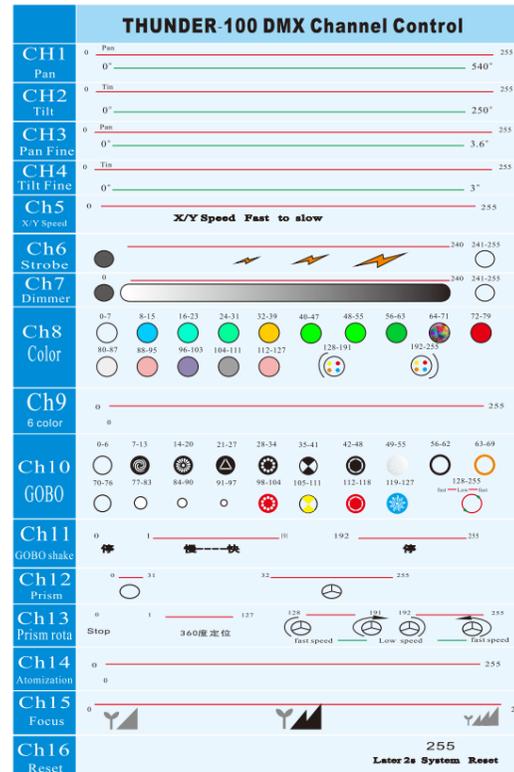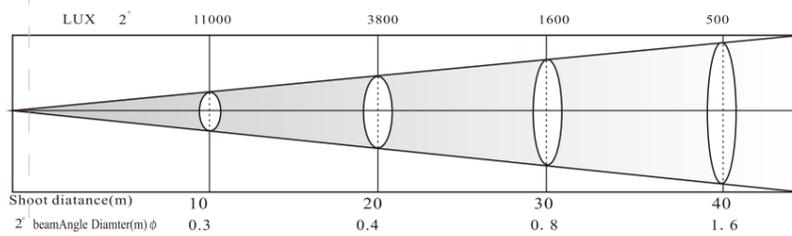

>>光效图

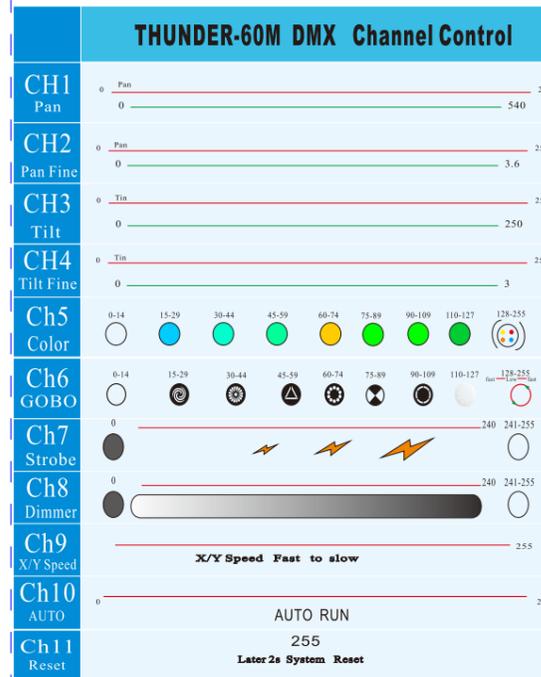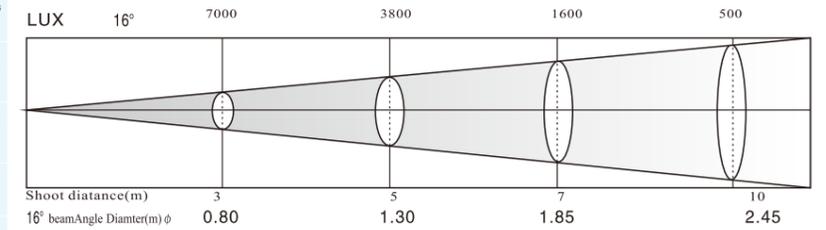

YLD-700 LED 光束摇头灯



◎ 技术参数:

额定电压: AC90-240V, 50/60Hz
光源: 7X40瓦 LED RGBW
额定功率: 320w
使用寿命: 50,000小时
净重: 10公斤
毛重: 12.5公斤
灯体尺寸: 长320×宽220×高420(mm)
包装尺寸: 长390×宽300×高485(mm)

◎ 性能特点:

光斑角度(可变焦): 3°-36°
颜色: RGBW 无极换色
调光: 0-100%线性调光
频闪: 0.5-20次/秒, 速度可调
旋转角度: 水平540°, 垂直270°
(自动回位纠错功能, 具有16bit精度调节)
切光: 具有颜色水平/垂直切光功能
控制: 国际标准DMX512信号, 3芯接口
通道: 17CH/10CH
显示: 液晶显示屏, 显示可选倒置
防护等级: IP20, 内置过热和触发高压保护, LED 温度显示

◎ TECHNICAL PARAMETER:

VOLTAGE: AC90- 240V 50/60Hz
LIGHT SOURCE: 7X40W LED
POWER CONSUMPTION: 320W
NET WEIGHT: 10KG
GROSS WEIGHT: 12.5KG
FIXTURE DIMENSION: L320×W220×H420(mm)
PACKING DIMENSION: L390×W300×H485(mm)

◎ PERFORMANCE FEATURE:

BEAM ANGLE: 3°-36°
COLOR: RGBWmacrocolorsystem.
DIMMER: 0~100% linearly adjustable
STROBE: 0.5~20 flash per second, speed adjustable
PAN AND TILT: Smooth, automatic Pan & Tilt position correction, speed adjustable
RANGE: Pan-540°, Tilt-270° (16-bit)
VECTOR MODE: Color+GOBO+Prism+XY Vector
CONTROL PROTOCOL: DMX 512, 3 pin interface
CHANNELS: 17/10CH
DISPLAY: screen, the words can be upside down
PROTECT GRADE: IP20, overheating & overvoltage protection

◎ 技术参数:

额定电压: AC90-240V, 50/60Hz
光源: 6X12W RGBW
额定功率: 120w
使用寿命: 50,000小时
净重: 5公斤
毛重: 7公斤
灯体尺寸: 220×宽220×高260(mm)
包装尺寸: 长280×宽280×高340(mm)

◎ 性能特点:

低功耗消耗
超强亮度, 无极限丰富亮丽色彩
DMX-512控制信号, 11/14个标准通道
机壳采用流线型新潮的PC工程塑料外壳, 一次成型
垂直扫描279度。
拥有8bit和16bit的扫描精度, 能顺滑精确定位, 并且可调节扫描速度
无限的RGBW颜色混色系统
光束角度5度
高速的电子调节频闪可达1-18次/秒
总调光控制通道可同时控制3个主颜色通道的明暗变化
机身控制的面板数码显示的字体可翻转180度, 适合摇头灯平放或者吊挂使用
具有主从同步运行功能, 音乐控制功能
显示: LCD数码显示, 显示可选倒置
防护等级: IP20, 内置过热和触发高压保护

◎ TECHNICAL PARAMETER:

VOLTAGE: AC90- 240V 50/60Hz
LIGHT SOURCE: 6X12W RGBW
POWER CONSUMPTION: 120W
NET WEIGHT: 5KG
GROSS WEIGHT: 7KG
FIXTURE DIMENSION: L220×W220×H260(mm)
PACKING DIMENSION: L280×W280×H340(mm)


◎ PERFORMANCE FEATURE:

RATED LIFE: 60,000~100,000hours
COLOR SYSTEM: RGBW color mixing
BEAM ANGLE: 5°
DIMMER: 0~100% linearly adjustable
STROBE: 1~18 flash per second, speed adjustable
PAN AND TILT: Smooth, automatic Pan&Tilt position correction, speed adjustable
RANGE: Pan-360°, Tilt-270° 16-bit
VECTOR MODE: Color+XY Vector
CONTROL PROTOCOL: DMX 512, 3 pin interface
CHANNELS: 11/14CH
DISPLAY: LCD, the words can be upside down.
PROTECT GRADE: IP20, overheating & overvoltage protection



YLD-6D LED光束摇头灯



>>光效图

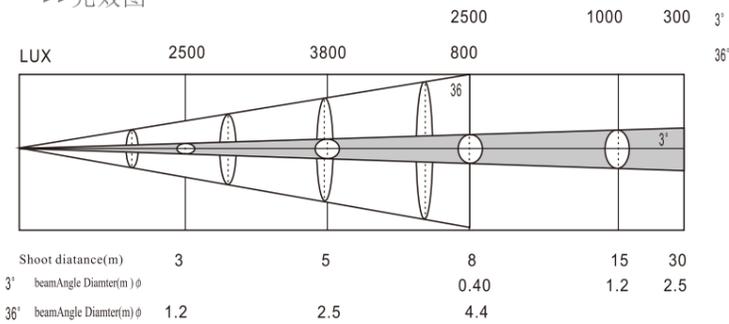

>>光效图

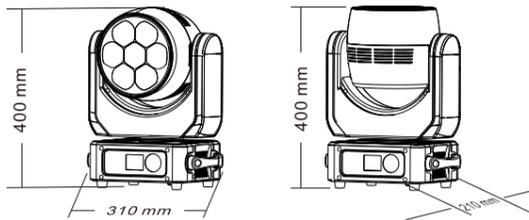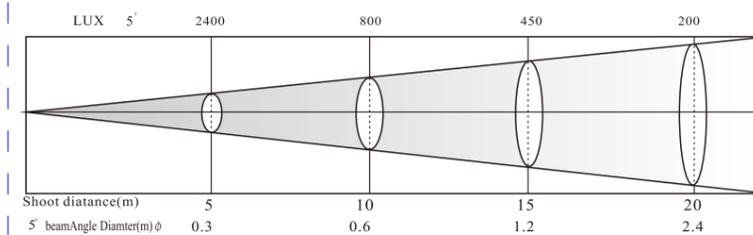

1	2	3	4	5	6	7	8	9	10
255 (Pan)	255 (Tilt)	255 (Focus)	255 (Strobe)	255 (Red)	255 (Green)	255 (Blue)	255 (White)	255 (Dimmer)	255 (Special function)
000	000	000	000	000	000	000	000	000	200-255 RESET (SS)

YLD-6D DMX Standard Channel Control	
CH1 Pan	0 255
CH2 Pan Fine	0 255
CH3 Tilt	0 255
CH4 Tilt Fine	0 255
Ch5 X/Y Speed	0 255
Ch6 Auto run	0 255
Ch7 Dimmer	0 240 241-255
Ch8 Red	0 255
Ch9 Green	0 255
Ch10 Blue	0 255
Ch11 White	0 255
Ch12 Strobe	0 240 241-255
Ch13 Auto color	0 255
Ch14 Auto run speed	0 255

YLD-8L

LED 十字旋风摇头灯



◎ 技术参数:

额定电压: AC90-240V, 50/60Hz
光源: 8X12W RGBW
额定功率: 200w
使用寿命: 50,000小时
净重: 10斤
毛重: 13公斤
灯体尺寸: 长420×宽420×高250 (mm)
包装尺寸: 长480×宽480×高320 (mm)

◎ 性能特点:

低功率消耗
超强亮度, 无极限丰富亮丽色彩
DMX-512控制信号, 47CH/31CH/18CH个标准通道
机壳采用流线型新潮的PC工程塑料外壳, 一次成型
水平扫描: 540度/无极旋转
垂直扫描: 90度
拥有8bit和16bit的扫描精度, 能顺滑精确定位, 并且可调节扫描速度
无限的RGBW颜色混色系统
光束角度3度
高速的电子调节频闪可达1-18次/秒
总调光控制通道可同时控制3个主颜色通道的明暗变化
机身控制的面板数码显示的字体可翻转180度, 适合摇头灯平放或者吊挂使用
具有主从同步运行功能, 音乐控制功能
显示: LCD数码显示, 显示可选倒置
防护等级: IP20, 内置过热和触发高压保护

◎ TECHNICAL PARAMETER:



VOLTAGE: AC90- 240V 50/60Hz
LIGHT SOURCE: 8X12W RGBW
POWER CONSUMPTION: 200W
NET WEIGHT: 10KG
GROSS WEIGHT: 13KG
FIXTURE DIMENSION: L420×W420×H250(mm)
PACKING DIMENSION: L480×W480×H320(mm)

◎ PERFORMANCE FEATURE:

RATED LIFE: 60,000~100,000hours
COLOR SYSTEM: RGBW color mixing
BEAM ANGLE: 3°
DIMMER: 0~100% linearly adjustable
STROBE: 1~18 flash per second, speed adjustable
PAN : 540°/ Infinite rotating
TILT: 90°
VECTOR MODE: Color+XY Vector
CONTROL PROTOCOL: DMX 512, 3 pin interface
CHANNELS: 11/14CH
DISPLAY: LCD, the words can be upside down.
PROTECT GRADE: IP20, overheating & overvoltage protection

YLD-8L DMX Standard Channel Control	
CH1 Pan	0-540
CH2 Pan Infinite	0-55 Pan stop, 56-155 Slow to Fast, 156-255 Slow to Fast
CH3 X Speed	X Speed Fast to slow
CH4 Tilt1	0-90
CH5 Tilt2	0-90
CH6 Tilt3	0-90
CH7 Tilt4	0-90
CH8 Dimmer	0-255
CH9 Strobe	0-255
CH10 Red	0-255
CH11 Green	0-255
CH12 Blue	0-255
CH13 White	0-255
CH14 gobo	0-255
CH15 effect	0-255
CH16 effect speed	Speed Fast to slow
CH17 macro	0-55 Nop, 50-99 GOBO, 100-149 EFFECT, 150-199 AUTO, 200-255 music
CH18 Reset	0-240, 251-255 3s later reset

>>光效图

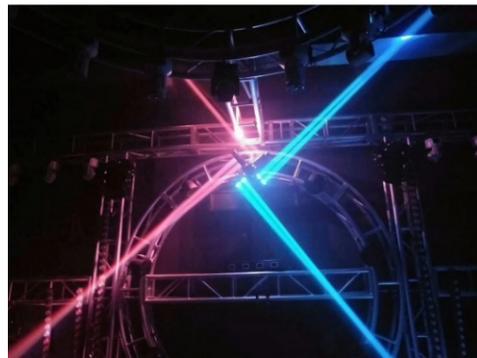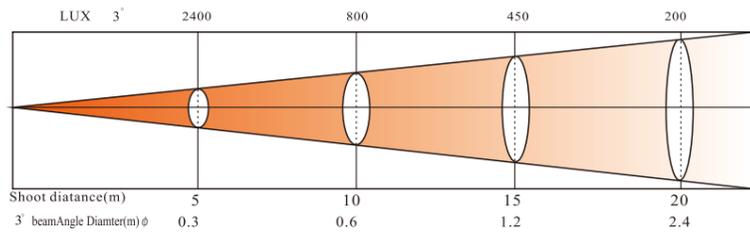

XQ-6M

LED 魔方摇头灯



◎ 技术参数:

电压: AC110V-260V 50/60Hz
功率: 200W
灯珠: 6颗×12W LED RGBW四合一
级别的寿命: 50000小时
颜色: 红绿蓝白四色
色温: 6000 K
控制模式: 8/22/26/69ch
光束角度: 10°
X轴转: 540°
Y轴: 无极360° 旋转
线性可调快门/闪光灯: 1 - 100%
线性可调亮度: 0 - 100%
IP: 20
频闪: 0-20次/秒, 矢量变化效果
净重: 6kg
毛重: 8kg
灯体尺寸: 长165×宽145×高335 (mm)
包装尺寸: 长280×宽220×高480mm



◎ TECHNICAL PARAMETER:

Extremely small, fast and powerful LED moving beam.
DMX Channels: 8/22/26/69ch
Pan: 540°, speed adjustable; Tilt: no limited
Smooth electronic dimming: 0-100%
Electronic strobe with pulse and random effects
High efficiency, low power consumption
Super compact, low weight
Beam angle: 10°
Voltage: 100V~240V, 50/60Hz
Light source: 6*12W 4 in 1 RGBW OSRAM +12*6*5050SMD 3 in 1 RGB
Power: 90W
Dimension: 165X145X335 mm+(150mm³)
FIXTURE DIMENSION: L165×W145×335mm
Packing size: L280×W220×H480mm
N.W.: 6kg
G.W.: 8kg



YLD-9M

LED 蛇型摇头灯



◎ 技术参数:

电压: AC110V-260V 50/60Hz
功率: 130W
灯珠: 9颗×10W LED RGBW四合一
级别的寿命: 50000小时
颜色: 红绿蓝白四色
控制模式: 15/20/47CH
光束角度: 5°
X轴转: 540°
线性可调快门/闪光灯: 1 - 100%
线性可调亮度: 0 - 100%
IP: 20
频闪: 0-20次/秒, 矢量变化效果
净重: 6kg
毛重: 7.5kg
灯体尺寸: 长290×宽270×高230 (mm)
包装尺寸: 长340×宽290×高290mm

◎ TECHNICAL PARAMETER:

Voltage: AC110V-260V 50/60Hz
Power consumption: 130W
Lamp: 9pcs×10W RGBW 4IN 1 LED
Rated lifespan: 50,000h
Color: RGBW
Control mode: 15/20/47CH
Beam angle: 5°
Pan: 540°
Shutter/strobe: 1-100% linear adjustable
Dimming: 0-100% linear adjustable
Strobe: 0-20 times per second, vector change effect
N.W.: 6kg
G.W.: 7.5kg
FIXTURE DIMENSION: L290×W270×H230mm
Packing size: L340×W290×H290mm



3 Meter Led Flame Lights

TX-1000R/RT

3米 LED火焰灯



◎技术参数:

工作电压: AC200-240V 50Hz/60Hz
光源: 36X3W 红 TX-1000R
36X3W RGB 3合一 TX-1000RT
功率: 400W
频闪: 1-20次/秒(TX-1000RT)
19个标准DMX512通道(TX-1000RT)
火焰高度: 3米
火焰宽度: 0.9米
特点: 多彩火焰效果, 梦幻火焰颜色动感变化, 颜色变化, 速度可调, 颜色设有频闪功能
控制模式: 遥控模式, DMX512信号模式, 主从控制模式(多台同步)带自走程序
工作环境: 室内0°C-40°C
预计使用寿命: 10000小时
符合各种安全保护, Ip20保护等级;
适用于舞台、广告宣传、展览会等场合
灯具尺寸: 长1120×宽300×高340(mm)
包装尺寸: 长1200×宽410×高440(mm)
净重: 25公斤
毛重: 28公斤

◎ TECHNICAL PARAMETER:

POWER: AC 200-240V 50Hz/60Hz
LIGHT SOURCE:36X3W R TX-1000R
36X3W RGB 3IN1 TX-1000RT
POWER CONSUMPTION: 400W
STROBE: 1-20time/second (TX-1000RT)
19standard DMX512 channels(TX-1000RT)
Flame height 3M
Flame width 0.9M
Feature: colorful flame effect, fire color,adjustable, Flash,Built-in programs
Control Mode: telecontrol mode, DMX512 signal control mode, master-slave control mode (Multiple simultaneous) procedures with self-propelled
Working environment:indoor 0°C -40°C
Expected useful life:10000hours
According to various kinds of safety standards, IP20 protect grade
As well as the stage, exhibition ,advertising.
FIXTURE DIMENSION: L1120x300x340(mm)
PACKING DIMENSION: L1200x410x440(mm)
NET WEIGHT: 25KG
GROSS WEIGHT: 28KG

◎技术参数:

工作电压: AC200-240V 50Hz/60Hz
光源: 24X3W RGB 3合一 LED
功率: 200W
频闪: 1-20次/秒
14个标准DMX512通道
火焰高度: 高度大小可调。
特点: 仿真火焰效果, 梦幻火焰颜色动感变化, 颜色变化, 速度可调, 颜色设有频闪功能
控制模式: 遥控模式, DMX512信号模式, 主从控制模式(多台同步)带自走程序
工作环境: 室内0°C-40°C
预计使用寿命: 10000小时
符合各种安全保护, Ip20保护等级;
适用于舞台、广告宣传、展览会、酒吧餐厅等场合。
灯具尺寸: 长320×宽320×高290(mm)
包装尺寸: 长380×宽380×高360(mm)
净重: 9公斤
毛重: 11公斤

◎ TECHNICAL PARAMETER:

POWER: AC 200-240V 50Hz/60Hz
LIGHT SOURCE:24x3w RGB 3IN1 LED
POWER CONSUMPTION: 200W
STROBE: 1-20time/second
14standard DMX512 channels
Flame height Height adjustable
Feature:The simulation flame effect, fantastic fire color,adjustable, Flash,Built-in programs
Control Mode: telecontrol mode, DMX512 signal control mode, master-slave control mode (Multiple simultaneous) procedures with self-propelled
Working environment:indoor 0°C-40°C
Expected useful life;10000hours
According to various kinds of safety standards, IP20 protect grade
As well as the stage,multi-functional studio and disco, exhibition ,Bar and restauran, tadvertising.
FIXTURE DIMENSION: L320x320x290(mm)
PACKING DIMENSION: L380x380x360(mm)
NET WEIGHT: 9KG
GROSS WEIGHT: 11KG

3D Led Flame Lights

DX-100

仿真梦幻LED火焰灯



同步自动运行连接图



DX-100 火焰灯是全新一代仿真火焰灯, 采用水雾化效果无污染, 火焰变化量可调节, 可变化出不同的梦幻效果, 特别适合酒吧, 餐厅, 酒店作特效使用。

Flame lamp is a new generation of simulation flame lamp, The water atomization effect is pollution-free, and the flame change can be adjusted A variety of fantasy effects, especially suitable for bars, restaurants, Hotel for special effects.

HLD-18M LED全彩Par灯



◎技术参数:

电 压: 90~240V AC, 50~60Hz
功 率: 160W
灯 珠: 18X8W RGBW 4合1
光学透镜: 标准25° 可选 45°、60°
8个标准DMX512通道
颜 色: 1670万种颜色变化, 有颜色
流水功能, 速度快慢可调
频 闪: 1~20次/秒线性调节
控制模式: DMX512信号控制模式,
主从控制模式(多台同步)带自走程序
电子调光: 0~100%线性调节
显 示 板: LED显示面板
冷却方式: 风扇冷却
保护措施: 过流、过压、温保
预计使用寿命: 50000个小时
外观尺寸: 长230×宽260×高300mm
包装尺寸: 长250×宽250×高360mm
净 重: 3kg
毛 重: 4kg
灯 体: 铸铝

◎ TECHNICAL PARAMETER:

Voltage: 90 ~ 240V AC, 50 ~ 60Hz
Power: 160W
Lamp beads: 18X8W RGBW 4 in 1
Optical lens: standard 25° optional 45°, 60°
8 standard DMX512 channels
Color: 1670 kinds of colors, colored water features,
speed Level speed adjustable
A variety of Flash: 1 ~ 20 times / sec linear regulator
Control Mode: DMX512 signal control mode,
master-slave control mode
(Multiple simultaneous)
procedures with self-propelled
Electronic dimming from 0 to 100% linear regulator
Display panel: LED display panel
Cooling: Fan cooling
Protection: over current, over voltage,
temperature and security
Expected useful life: 50,000 hours
DIMENSIONS: L230×260×300mm
PACKING SIZE: L250×250×360mm
Net weight: 3kg
Gross weight: 4kg
Lamp body: aluminum

WED-12M LED防水投光灯



◎技术参数:

电 压: 90~240V AC, 50~60Hz
额定功率: 120W
光源功率: 12×8W 4合1
防水等级: IP65
预计使用寿命: ≥50000个小时
控制通道: 7CH标准DMX512通道控制
连接数量: 一个回路可连接20台。
控制模式: DMX512信号控制模式,
主从控制模式(多台同步)带自走程序
保护功能: 过压、过流、温保自动复位功能
环境温度: -18°C~38°C
工作温升: 10°C~35°C
颜 色: 颜色可任意调节变化,
有颜色流水功能, 速度快慢可调
调 光: 0~100%电子调光,
各颜色可以单独或是混合调光
频 闪: 1~25次/秒高速频闪,
可以单色, 混色温频闪
显 示 板: LED显示面板
冷却方式: 机体自动散热
外观尺寸: 长270×宽280×高140mm
包装尺寸: 长250×宽250×高360mm
净 重: 5kg
毛 重: 6kg

◎ TECHNICAL PARAMETER:

VOLTAGE: 90 ~ 240V AC, 50 ~ 60HZ
POWER: 120W
POWER OF LIGHT SOURCE: 12x 8W 4IN1
WATERPROOF GRADE: Ip65
EXPECTED SERVICE LIFE: 50000 hours
CONTROL CHANNEL: 7CH standard DMX512
channel control
THE MUNBER OF CONNECTIONS: one line can
be conncted to 20
CONTROL MODE: DMX512 signal control mode,
master-slavecontrol mode (Multiple
simultaneous) procedures
withself-propelled
Protective function of overvoltage, overcurrent,
PROTECTION : automatic reset function
AMBIENT TEMPERATURE:- 18°C-38°C
WORKING TEMPERATURE:10°C-35°C
COLOR: any color can be adjusted the color
change, water features, speed can
be adjusted
DIMMING: 0-100% electronic dimming,
various colors can be alone or mixed light
modulation
STROBE: 1-25 / s high-speed stroboscopic,
can be monochromatic, mixed color
temperature light
DISPLAY PANEL: LED display panel
COOLING MEANS: automatic radiating body
DIMENSIONS: L270 x 280 x 140mm
PACKING SIZE:L250x W250 x H360mm
N.W:5kg
G.W:6kg

PLD-60/54M LED全彩Par灯



◎技术参数:

电 压: 90~240V AC, 50~60Hz
功 率: 160W
灯 珠: 60/54X2W RGB 3合1
光学透镜: 标准25° 可选15°、30°、
45°、60°
7个标准DMX512通道
颜 色: 1670万种颜色变化, 有颜色
流水功能, 速度快慢可调
频 闪: 1~20次/秒线性调节
控制模式: DMX512信号控制模式,
主从控制模式(多台同步)带自走程序
电子调光: 0~100%线性调节
显 示 板: LED显示面板
冷却方式: 风扇冷却
保护措施: 过流、过压、温保
预计使用寿命: 50000个小时
外观尺寸: 长260×宽260×高160mm
包装尺寸: 长300×宽300×高220mm
净 重: 2.8kg
毛 重: 3.5kg
灯 体: 塑胶

◎ TECHNICAL PARAMETER:

Voltage: 90 ~ 240V AC, 50 ~ 60HZ
Power: 160W
Lamp beads: 60/54X2W RGB 3 in 1
Optical lens: standard 25° optional 15°, 30°, 45°, 60°
7 standard DMX512 channels
Color: 1670 kinds of colors, colored water features,
speed Level speed adjustable
A variety of Flash: 1 ~ 20 times / sec linear regulator
Control Mode: DMX512 signal control mode,
master-slave control mode
(Multiple simultaneous)
procedures with self-propelled
Electronic dimming from 0 to 100% linear regulator
Display panel: LED display panel
Cooling: Fan cooling
Protection: over current, over voltage,
temperature and security
Expected useful life: 50,000 hours
DIMENSIONS: L260×260×160mm
PACKING SIZE: L300×W300×H220mm
Net weight: 2.8kg
Gross weight: 3.5kg
Lamp body: plastic

PLD-7D/18 LED PAR灯



◎技术参数:

电 压: 90~240V AC, 50~60Hz
功 率: 60W
灯 珠: 7X8W 4IN1/18X3W
光学透镜: 标准25° 可选15°、30°、
45°、60°
7个标准DMX512通道
颜 色: 1670万种颜色变化, 有颜色
流水功能, 速度快慢可调
频 闪: 1~20次/秒线性调节
控制模式: DMX512信号控制模式,
主从控制模式(多台同步)带自走程序
电子调光: 0~100%线性调节
显 示 板: LED显示面板
冷却方式: 风扇冷却
保护措施: 过流、过压、温保
预计使用寿命: 50000个小时
外观尺寸: 长200×宽200×高120mm
包装尺寸: 长250×宽250×高180mm
净 重: 1.8kg
毛 重: 2.5kg
灯 体: 塑胶

◎ TECHNICAL PARAMETER:

Voltage: 90 ~ 240V AC, 50 ~ 60HZ
Power: 60W
Lamp beads: 7X8W 4IN1/18X3W
Optical lens: standard 25° optional 15°, 30°, 45°, 60°
7 standard DMX512 channels
Color: 1670 kinds of colors, colored water features,
speed Level speed adjustable
A variety of Flash: 1 ~ 20 times / sec linear regulator
Control Mode: DMX512 signal control mode,
master-slave control mode
(Multiple simultaneous)
procedures with self-propelled
Electronic dimming from 0 to 100% linear regulator
Display panel: LED display panel
Cooling: Fan cooling
Protection: over current, over voltage,
temperature and security
Expected useful life: 50,000 hours
DIMENSIONS: L200×200×120mm
PACKING SIZE: L250×W250×H180mm
Net weight: 1.8kg
Gross weight: 2.5kg
Lamp body: plastic

FM-200

LED大功率投光灯



◎技术参数:

电 压: 90~240V AC, 50~60Hz
功 率: 230W
灯 珠: 200W COB
2个标准DMX512通道
颜 色: 4500K白光
多种频闪: 1~25次/秒
控制模式: DMX512信号控制模式,
主从控制模式(多台同步)带自走程序
电子调光0~100%线性调节
显 示 板: LED显示面板
冷却方式: 风扇冷却
保护措施: 过流、过压、温保
预计使用寿命: 50000个小时
外观尺寸: 长300×宽230×高320mm
包装尺寸: 长350×宽250×高360mm
净 重: 6.5kg
毛 重: 8kg
灯 体: 铸铝

◎TECHNICAL PARAMETER:

Voltage: 90 ~ 240V AC, 50 ~ 60HZ
Power: 230W
Lamp beads: 200W COB
2standard DMX512 channels
Color: 4500K white
A variety of Flash: 1 ~ 25 times / sec (conventional strobe,
Control Mode: DMX512 signal control mode, master-slave
control mode (Multiple simultaneous) procedures
withself-propelled
Electronic dimming from 0 to 100% linear regulator
Display panel: LED display panel
Cooling: Fan cooling
Protection: over current, over voltage, temperature and security
Expected useful life: 50,000 hours
DIMENSIONS: L300×230×300mm
PACKING SIZE:L350 ×250 ×360mm
Net weight: 6.5kg
Gross weight: 8kg
Lamp body: aluminum

FM-400

LED观众灯



◎技术参数:

电 压: 90~240V AC, 50~60Hz
功 率: 450W
灯 珠: 400W COB
8个标准DMX512通道
颜 色: 4500K白光
多种频闪: 1~25次/秒
控制模式: DMX512信号控制模式,
主从控制模式(多台同步)带自走程序
电子调光0~100%线性调节
显 示 板: LED显示面板
冷却方式: 风扇冷却
保护措施: 过流、过压、温保
预计使用寿命: 50000个小时
外观尺寸: 长360×宽360×高220mm
包装尺寸: 长420×宽420×300mm
净 重: 10kg
毛 重: 13kg
灯 体: 铝

◎TECHNICAL PARAMETER:

Voltage: 90 ~ 240V AC, 50 ~ 60HZ
Power: 450W
Lamp beads: 400W COB
8standard DMX512 channels
Color: 4500K white
A variety of Flash: 1 ~ 25 times / sec (conventional strobe,
Control Mode: DMX512 signal control mode, master-slave
control mode (Multiple simultaneous) procedures
withself-propelled
Electronic dimming from 0 to 100% linear regulator
Display panel: LED display panel
Cooling: Fan cooling
Protection: over current, over voltage, temperature and security
Expected useful life: 50,000 hours
DIMENSIONS: L360×360×220mm
PACKING SIZE:L420 ×420 ×300mm
Net weight: 10kg
Gross weight: 13kg
Lamp body: aluminum

Action-240



Action-1024



◎技术参数:

DMX 512/1990标准, 192DMX控制通道。
可控制12台电脑灯。
16个通道控制。
电压: AC220V±10% 50Hz
功率: 30W
外观尺寸: 长484×宽220×高90mm
包装尺寸: 长510×宽305×高130mm
净重: 3.5KG
毛重: 5KG

◎TECHNICAL PARAMETER:

DMX512 / 1990 standard, up to 192 DMX channels,
optically isolated signal output.
maximum control 12 light
VOLTAGE: AC90- 240V 50/60Hz
POWER CONSUMPTION: 30W
NET WEIGHT: 3.5KG
GROSS WEIGHT: 5KG
FIXTURE DIMENSION: L484×W220×H90(mm)
PACKING DIMENSION: L510×W305×H130(mm)

◎技术参数:

DMX 512/1990标准, 1024DMX控制通道。
可控制96台电脑灯。
电压: AC220V±10% 50Hz
功率: 100W
外观尺寸: 长484×宽400×高105mm
包装尺寸: 长510×宽505×高160mm
净重: 8KG
毛重: 10KG

◎TECHNICAL PARAMETER:

DMX512 / 1990 standard, up to 1024 DMX channels,
optically isolated signal output.
maximum control 96 light
VOLTAGE: AC90- 240V 50/60Hz
POWER CONSUMPTION: 100W
NET WEIGHT: 8KG
GROSS WEIGHT: 10KG
FIXTURE DIMENSION: L484×W400×H105(mm)
PACKING DIMENSION: L510×W505×H160(mm)

Action 系列无线控制台内置无线发射模块
内置8000MA锂电池和智能充电模块, 具有
8小时的续航时间。配合亮星系列内置无线
模块的电脑灯可实现灯和控台之间方便的无
线传输。

ACTION series wireless console has a built-in
wireless transmitter module Built-in 8000MA
lithium battery and intelligent charging module,
with eight hours of battery life. With SKYSTAR
The built-in wireless module series computer lights
can be realize the convenient wireless transmission
between the lamp and the console.

无线系统连接图

