

SKYSTAR

2021



广州亮星灯光科技有限公司

Guangzhou Skystar Lighting Co., Ltd.

地址：中国 广东 广州市天河区 龙洞迎龙大道260号龙山工业园E-1栋二层
电话：020-87022418
传真：020-87023011
移动电话：1360286313 15876563678
网址：www.lightskystar.com
http://skystarstage.com
电子邮箱：623872311@qq.com, 2574031523@qq.com,
1725113820@qq.com

Add: 2F., Building E-1, Longshan industry Park, Yinglong RD., Longdong,
Tianhe District, Guangzhou China.
Wed site: www.lightskystar.com
http://skystarstage.com
E-mail: 623872311@qq.com, 2574031523@qq.com
1725113820@qq.com
Tel: +8620-87022418
Fax: +8620-87023011
cellphone: +86 13609702481 (NIKI)
Whatsapp: +86 15876563678 (Davy Kwok)

广州亮星灯光科技有限公司

Guangzhou Skystar Lighting Co., Ltd.

SG-380




技术参数:

灯泡: 18R 380W/OSRAM 371W
功耗: 230V 50HZ 500W
额定功率: 500w
使用寿命: 1500小时
光斑角度(可变焦): 3°—45°
颜色轮: 9个颜色片+白光, 半色效果, 可做双向变速彩虹效果。
图案: 旋转图案轮: 7个可更换图案片(其中4个玻璃图案)+白光, 可做双向变速效果。
图案: 固定图案轮: 12个可更换图案片+白光, 可做双向变速效果。
棱镜: 八棱镜和排镜双向旋转, 速度可调
调焦: 线性调焦
雾化: 0%-100%可调
调光: 0-100%线性调光
频闪: 0.5-20次/秒, 速度可调
旋转角度: 水平540°, 垂直270°
自动回位纠错功能, 具有16bit精度调节)
切光: 具有颜色+图案+棱镜+水平/垂直切光功能
控制: 国际标准DMX512信号, 3芯接口
通道: 24CH
显示: 触摸显示屏, 显示可选倒置
防护等级: IP20, 内置过热和触发高压保护, LED温度显示
净重: 21公斤
毛重: 24公斤
灯体尺寸: 长360×宽270×高650(mm)
包装尺寸: 长420×宽320×高710(mm)

TECHNICAL PARAMETER:

VOLTAGE: AC90- 240V 50/60Hz
LIGHT SOURCE: 18R 380W/OSRAM 371W
POWER CONSUMPTION: 500W
BEAM ANGLE: 3°--45°
1 COLOR WHEEL: 9 colors+open, half color effect, bi-directional rainbow effect at variable speed
1 ROTATING GOBO WHEEL: 7 rotating gobos+open, bi-directionally rotating at variable speed
1 FIX GOBO WHEEL: 12 fix gobos+open, bi-directionally rotating at variable speed
2 PRISM WHEEL: 8-facet prism, 6-facet linear prism bi-directionally rotating, at variable speed
FOCUS: Linearly adjustable
WASH: 0~100% adjustable
DIMMER: 0~100% linearly adjustable
STROBE: 0.5~20 flash per second, speed adjustable
PAN AND TILT: Smooth, automatic Pan & Tilt position correction, speed adjustable
RANGE: Pan-540°, Tilt-270°(16-bit)
VECTOR MODE: Color+GOBO+Prism+XY Vector
CONTROL PROTOCOL: DMX 512, 3 pin interface
CHANNELS: 24CH
DISPLAY: Touch screen, the words can be upside down
PROTECT GRADE: IP20, overheating & overvoltage protection
NET WEIGHT: 21KG
GROSS WEIGHT: 24KG
FIXTURE DIMENSION: L360×W270×H650(mm)
PACKING DIMENSION: L420×W320×H710(mm)

SG-380 >>光效图

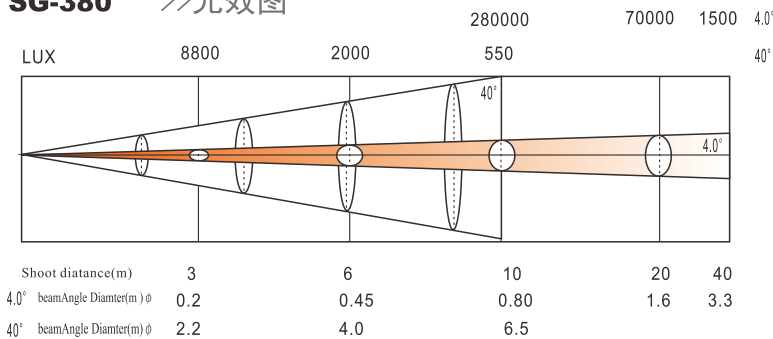

SR-440




技术参数:

灯泡: 20R 440W
功耗: 90V-240V 50HZ, 560VA
光学器件: 高效率镜头组, 变焦0°至2°
电子聚焦: 20米处, 210000LUX
通道模式: 16个两种国际标准DMX512通道
水平扫描: 540°(16bit精度扫描)
垂直扫描: 280°(16bit精度扫描)
色片盘: 14个色片+白光, 带双向旋转的彩虹效果
图案盘: 17个图案片+白圆, 带图案抖动和图案任意定位功能
棱镜盘: 五个可旋转棱镜, 两个棱镜盘, 一个圆形48棱镜, 一个16棱镜, 可叠加。可正反方向旋转, 并具有棱镜定位功能。
频闪: 双侧刀频闪频率最高可以13次每秒, 并可选择随机频闪及脉冲频闪
调光: 0%~100%线性调光
雾化: 0%~100%线性雾化
效果盘: 六彩盘
电子整流器: 使产品重量更轻, 亮度更强, 灯泡更稳定, 更环保, 更节能
开关电源: AC100~240V, 50/60HZ
灯体尺寸: 长400×宽320×高650(mm)
包装尺寸: 长470×宽450×高680(mm)
净重: 21公斤
毛重: 24公斤

TECHNICAL PARAMETER:

VOLTAGE: AC90- 240V 50/60Hz
LIGHT SOURCE: 20R,440W
POWER CONSUMPTION: 560W
OPTICAL DEVICE: high efficiency lens group,0°-2°zoom
ELECTRONIC FOCUS: 20 meters, 210000 LUX
CHANNEL MODE: 16 standard DMX512 channel
LEVEL SCANNING: 540 (16 bit precision scan)
VERTICAL SCAN: 280 (16 bit precision scan)
COLOR WHEEL: 14color and white light with two-way rotating and rainbow effect
GOBO WHEEL: 17 gobos and white circle with design jitter and arbitrary positioning function
PRISM: 5 prism,2 prism wheel, 48-facet circular prism, 6-facet linear prism, with superposition,positive and negative rotation and prism location function.
SHUT: Double pole shut up to 13 times per second, random shut and pulse shut can be choosed
DIMMER: 0% ~ 100% linear dimmer
FROST: 0% ~ 100% linear frost
EFFECT: 6 color wheel
Electronic ballast : make the product more light and bright.
Lamp more stable environmental protection and more energy saving
SWITCHING POWER SUPPLY : AC100 ~ 240 V, 50/60 HZ
FIXTURE DIMENSION: L400×W320×H650(mm)
PACKING DIMENSION: L470×W450×H680(mm)
NET WEIGHT: 21KG
GROSS WEIGHT: 24KG

SR-440 >>光效图

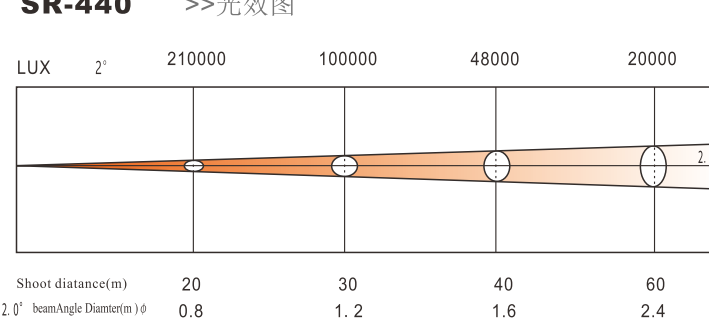

SR-380/311




技术参数:

灯泡: 18R 380W /ORSAM HRI 311W
 功耗: 230V 50HZ 500W/450W
 光学器件: 高效率镜头组, 变焦0° 至 1.5°
 电子聚焦: 20米处, 150000LUX
 通道模式: 16个国际标准DMX512通道
 水平扫描: 540° (16bit精度扫描)
 垂直扫描: 280° (16bit精度扫描)
 色片盘: 14个色片+白光, 带双向旋转的彩虹效果
 图案盘: 17个图案片+白圆,
 带图案抖动和图案任意定位功能
 棱镜盘2个可旋转棱镜, 两个棱镜盘可叠加。
 可正反方向旋转。
 频闪: 双铡刀频闪频率最高可以13次每秒,
 并可选择随机频闪及脉冲频闪
 调光: 0%-100%线性调光
 雾化: 0%-100%线性雾化
 电子整流器: 使产品重量更轻, 亮度更强,
 灯泡更稳定, 更环保, 更节能
 开关电源: AC100-240V, 50/60HZ
 灯体尺寸: 长325×宽270×高555(mm)
 包装尺寸: 长415×宽330×高635(mm)
 净重: 15公斤
 毛重: 24公斤

TECHNICAL PARAMETER:

LIGHT SOURCE: 18R 380W /ORSAM HRI 311W
 POWER CONSUMPTION: 230 V 50 HZ 500W/ 450W
 OPTICAL DEVICE: high efficiency lens group, 0°-1.5° zoom
 ELECTRONIC FOCUS: 20 meters, 150000 LUX
 CHANNEL MODE: 16 standard DMX512 channel
 LEVEL SCANNING: 540 (16 bit precision scan)
 VERTICAL SCAN: 280 (16 bit precision scan)
 COLOR WHEEL: 14 color and white light
 with two-way rotating and rainbow effect
 GOBO WHEEL: 17 gobos and white circle
 with design jitter and arbitrary positioning function
 PRISM: 2 prism, 2 prism wheel with superposition,
 positive and negative rotation.
 SHUT: Double pole shut up to 13 times per second,
 random shut and pulse shut can be choosed
 DIMMER: 0%-100% linear dimmer
 FROST: 0%-100% linear frost
 Electronic ballast: make the product more light and bright,
 Lamp more stable environmental protection and
 more energy saving
 SWITCHING POWER SUPPLY: AC100-240 V, 50/60 HZ
 FIXTURE DIMENSION: L325×270×555(mm)
 PACKING DIMENSION: L415×330×635(mm)
 NET WEIGHT: 15KG
 GROSS WEIGHT: 17KG

SR-380/311 >>光效图

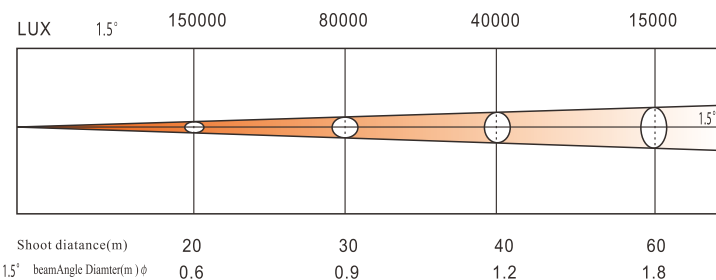

SR-300





技术参数:

灯泡: 12R 300W
 功耗: 90V-240V 50HZ, 400W
 光学器件: 高效率镜头组, 变焦0° 至 1.5°
 电子聚焦: 20米处, 140000LUX
 通道模式: 16个两种国际标准DMX512通道
 水平扫描: 540° (16bit精度扫描)
 垂直扫描: 280° (16bit精度扫描)
 色片盘: 12个色片+白光,
 带双向旋转的彩虹效果
 图案盘: 15个图案片+白圆,
 带图案抖动和图案任意定位功能
 棱镜盘2个可旋转棱镜, 两个棱镜盘可叠加。
 可正反方向旋转。
 频闪: 双铡刀频闪频率最高可以13次每秒,
 并可选择随机频闪及脉冲频闪
 调光: 0%-100%线性调光
 雾化: 0%-100%线性雾化
 效果盘: 六彩盘
 电子整流器: 使产品重量更轻, 亮度更强,
 灯泡更稳定, 更环保, 更节能
 开关电源: AC100~240V, 50/60HZ
 灯体尺寸: 长324×宽237×高495(mm)
 包装尺寸: 长390×宽320×高560(mm)
 净重: 13.5公斤
 毛重: 15.5公斤

TECHNICAL PARAMETER:

VOLTAGE: AC90- 240V 50/60Hz
 LIGHT SOURCE: 12R,300W
 POWER CONSUMPTION: 400W
 OPTICAL DEVICE: high efficiency lens group, 0°-1.5° zoom
 ELECTRONIC FOCUS: 20 meters, 140000 LUX
 CHANNEL MODE: 16 standard DMX512 channel
 LEVEL SCANNING: 540 (16 bit precision scan)
 VERTICAL SCAN: 280 (16 bit precision scan)
 COLOR WHEEL: 12 color and white light
 with two-way rotating and rainbow effect
 GOBO WHEEL: 15 gobos and white circle
 with design jitter and arbitrary positioning function
 PRISM: 2 prism, 2 prism wheel with superposition,
 positive and negative rotation.
 SHUT: Double pole shut up to 13 times per second,
 random shut and pulse shut can be choosed
 DIMMER: 0% ~ 100% linear dimmer
 FROST: 0% ~ 100% linear frost
 EFFECT: 6 color wheel
 Electronic ballast: make the product more light and bright.
 Lamp more stable environmental protection and
 more energy saving
 SWITCHING POWER SUPPLY: AC100 ~ 240 V, 50/60 HZ
 FIXTURE DIMENSION: L324×W237×H495(mm)
 PACKING DIMENSION: L390×W320×H560(mm)
 NET WEIGHT: 13.5KG
 GROSS WEIGHT: 15.5KG

SR-300 >>光效图

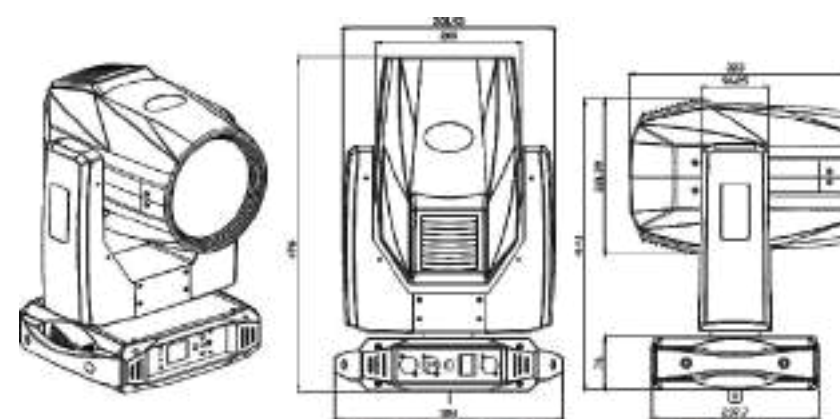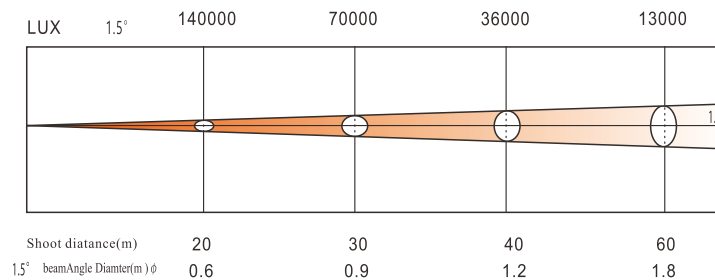

SR-295





技术参数:

灯泡: 10R 290W
 功耗: 230V 50HZ 400W
 光学器件: 高效率镜头组, 变焦0° 至 3.8°
 电子聚焦: 20米处, 90000LUX
 通道模式: 16个国际标准DMX512通道
 水平扫描: 540° (16bit精度扫描)
 垂直扫描: 280° (16bit精度扫描)
 色片盘: 14个色片+白光, 带双向旋转的彩虹效果
 旋转图案盘: 17个图案片+白圆,
 带图案抖动和图案任意定位功能
 棱镜盘2个可旋转棱镜, 两个棱镜盘可叠加。
 可正反方向旋转。
 频闪: 双铡刀频闪频率最高可以13次每秒,
 并可选择随机频闪及脉冲频闪
 调光: 0%-100%线性调光
 雾化: 0%-100%线性雾化
 效果: 6彩盘
 电子整流器: 使产品重量更轻, 亮度更强,
 灯泡更稳定, 更环保, 更节能
 开关电源: AC100-240V, 50/60HZ
 灯体尺寸: 长336×宽249×高515(mm)
 包装尺寸: 长380×宽300×高580(mm)
 净重: 14公斤
 毛重: 16公斤

TECHNICAL PARAMETER:

VOLTAGE: AC90- 240V 50/60Hz
 LIGHT SOURCE: 10R 290W
 CUSTOMIZED LIGHT SOURCE 290W
 POWER CONSUMPTION: 400W
 BEAM ANGLE: 0-3.8°
 ELECTRONIC FOCUS: 20 meters, 90000 LUX
 1 COLOR WHEEL: 14 colors+open, half color effect,
 bi-directional rainbow effect at variable speed
 1 FIX GOBO WHEEL: 17 fix gobos (includes 3 glass gobos)
 +open, bi-directionally rotating at variable speed
 at variable speed
 PRISM: 48 facet prisms, 6-facet linear prism with positive and
 negative rotation and prism location function
 EFFECT: 6 color wheel, frost
 FOCUS: Linearly adjustable
 DIMMER: 0~100% linearly adjustable
 STROBE: 0.5~20 flash per second, speed adjustable
 RANGE: Pan-540°, Tilt-270°
 VECTOR MODE: Color+GOBO+Prism+XY Vector
 CONTROL PROTOCOL: DMX 512, 3 pin interface
 CHANNELS: 16CH
 FIXTURE DIMENSION: L336×W249×H515(mm)
 PACKING DIMENSION: L380×W300×H580(mm)
 N.W.: 14 kgs
 GROSS WEIGHT: 16KG

SR-295 >>光效图

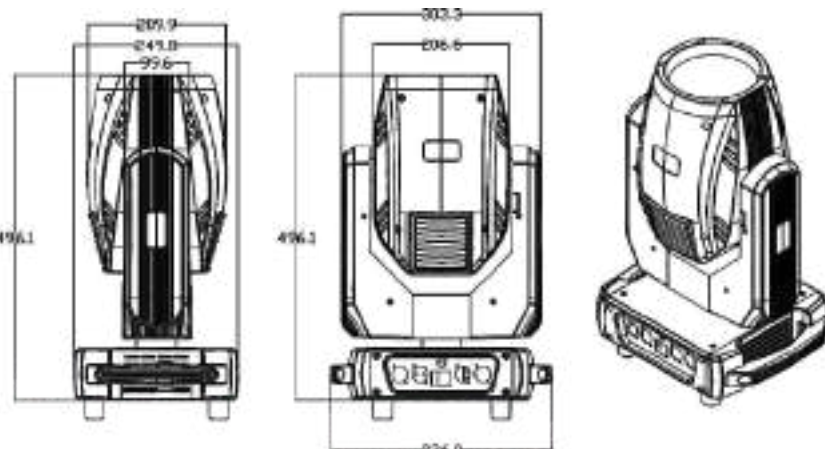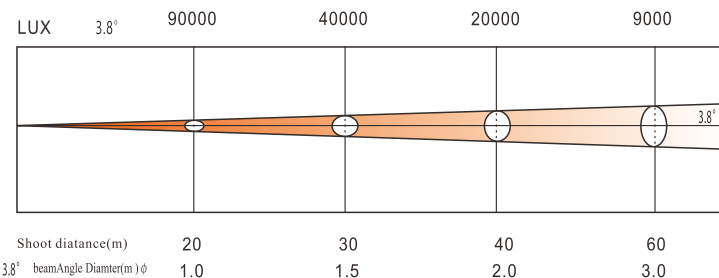

SR-240




技术参数:

灯泡: 240W (8000K色温, 2000小时)
 功耗: 230V 50HZ 380W
 光学器件: 3片透镜式镜头组, 调焦0° 至 3°
 放大: 0° 至 8°
 显示: 2.2寸触摸液晶显示屏
 电子聚焦: 20米处, 75000LUX
 通道模式: 20个国际标准DMX512通道
 水平扫描: 540° (16bit精度扫描)
 垂直扫描: 280° (16bit精度扫描)
 色片盘: 14个色片+白光,
 带双向旋转的彩虹效果
 旋转图案盘: 7个图案片+白圆,
 图案自转和图案任意定位功能
 图案盘: 17个图案片+白圆,
 带图案抖动和图案任意定位功能
 棱镜盘: 48棱镜和排镜, 都可正反
 方向旋转, 并具有棱镜定位功能。
 频闪: 双铡刀频闪频率最高可以13次每秒,
 并可选择随机频闪及脉冲频闪
 调光: 0%~100%线性调光
 雾化: 七色盘效果
 电子整流器: 使产品重量更轻, 亮度更强,
 灯泡更稳定, 更环保, 更节能
 开关电源: AC100~240V, 50/60HZ
 灯体尺寸: 长430×宽330×高510(mm)
 包装尺寸: 长460×宽385×高565(mm)
 净重: 16.5公斤
 毛重: 19公斤



TECHNICAL PARAMETER:

BULB: 240W (8000 K color temperature, 2000 hours)
 POWER CONSUMPTION: 230 V 50 HZ W
 OPTICAL DEVICE: three lens group, 0° -3°
 ZOOM: 0° -8°
 ELECTRONIC FOCUS: 20 meters 75000LUX
 CHANNEL MODE: 20 international standard
 DMX512 channel
 LEVEL SCANNING: 540 (16 bit precision scan)
 VERTICAL SCAN: 280 (16 bit precision scan)
 COLOR WHEEL: 14color and white light with
 wo-way rotating and rainbow effect
 ROTATING GOBO WHEEL: 7 gobos and white circle
 gobo rotating and arbitrary positioning function
 GOBO WHEEL: 17 gobos and white circle
 with design jitter and arbitrary positioning function
 PRISM: 48 prisms, 6 facet linear prism with positive and
 negative rotation and prism location function.
 SHUT: Double pole shut up to 13 times per second,
 random shut and pulse shut can be choosed
 DIMMER: 0% ~ 100% linear dimmer
 FROST: 7 Color wheel
 Electronic ballast: make the product more light and bright
 Lamp more stable environmental protection and
 more energy saving
 SWITCHING POWER SUPPLY : AC100 -240 V, 50/60HZ
 FIXTURE DIMENSION: L430×330×510 (mm)
 PACKING DIMENSION: L460×385×565 (mm)
 NET WEIGHT: 16.5KG
 GROSS WEIGHT: 19KG

SR-240 DMX Channel Control

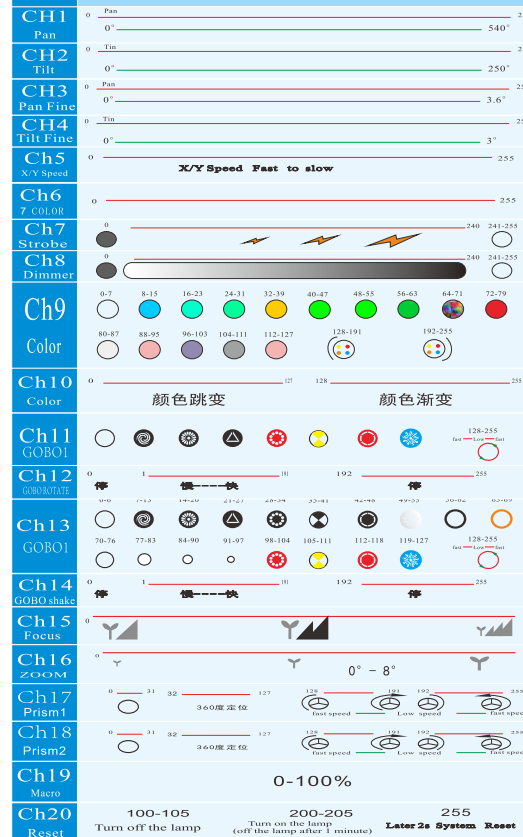

SR-240 >>光效图

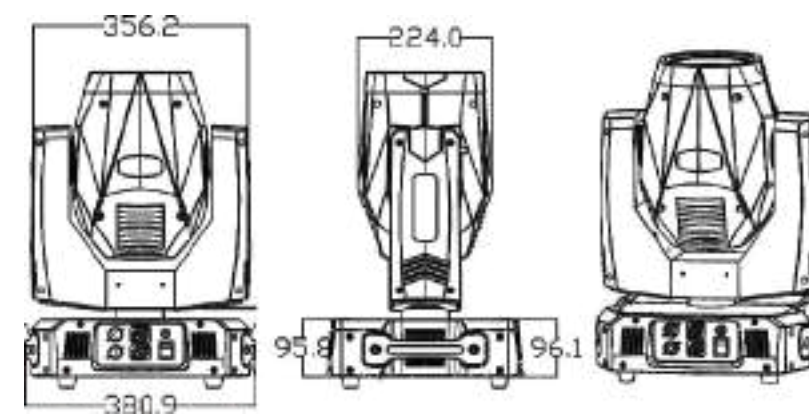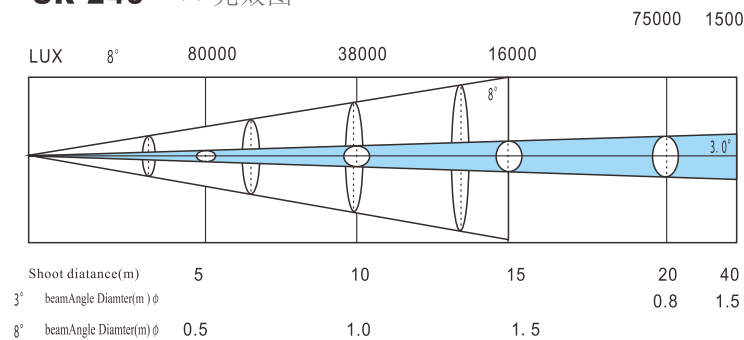

SR-230


技术参数:

灯泡: 7R 230W
功耗: 230V 50HZ 350W
光学器件: 高效率镜头组, 变焦0° 至 3.8°
电子聚焦: 20米处, 70000LUX
通道模式: 16个国际标准DMX512通道
水平扫描: 540° (16bit精度扫描)
垂直扫描: 280° (16bit精度扫描)
色片盘: 14个色片+白光, 带双向旋转的彩虹效果
旋转图案盘: 17个图案片+白圆,
带图案抖动和图案任意定位功能
棱镜盘1个48面可旋转棱镜, 可正反方向旋转。
频闪: 双铡刀频闪频率最高可以13次每秒,
并可选择随机频闪及脉冲频闪
调光: 0%-100%线性调光
雾化: 0%-100%线性雾化
电子整流器: 使产品重量更轻, 亮度更强,
灯泡更稳定, 更环保, 更节能
开关电源: AC100-240V, 50/60HZ
灯体尺寸: 长430×宽330×高500 (mm)
包装尺寸: 长460×宽385×高565 (mm)
净重: 16.5公斤
毛重: 19公斤

TECHNICAL PARAMETER:

VOLTAGE: AC90- 240V 50/60Hz
LIGHT SOURCE: 7R 230W
POWER CONSUMPTION: 350W
BEAM ANGLE: 0-3.8°
ELECTRONIC FOCUS: 20 meters, 70000 LUX
1 COLOR WHEEL: 14 colors+open, half color effect,
bi-directional rainbow effect at variable speed
1 FIX GOBO WHEEL: 17 fix gobos (includes 3 glass gobos)
+open, bi-directionally rotating at variable speed
at variable speed
PRISM: 48 facet prisms with positive and negative
rotation and prism location function.
EFFECT: 0-100% frost
FOCUS: Linearly adjustable
DIMMER: 0~100% linearly adjustable
STROBE: 0.5~20 flash per second, speed adjustable
RANGE: Pan-540°, Tilt-270°
VECTOR MODE: Color+GOBO+Prism+XY Vector
CONTROL PROTOCOL: DMX 512, 3 pin interface
CHANNELS: 16CH
FIXTURE DIMENSION: L430×W330×H500 (mm)
PACKING DIMENSION: L460×W385×H565 (mm)
N.W.: 16.5 kgs
GROSS WEIGHT: 19KG

>>光效图

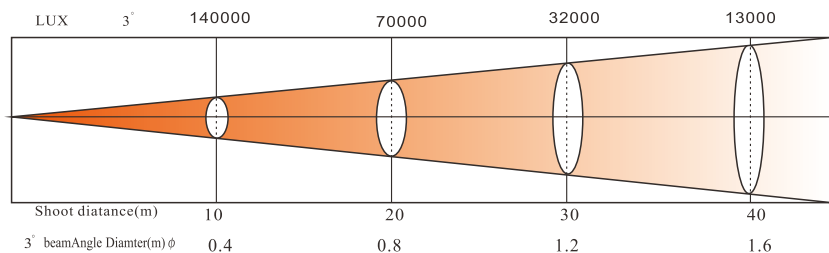

SR-230 DMX Channel Control			
CH1 Pan	0°	540°	255
CH2 Tilt	0°	250°	255
CH3 Pan Fine	0°	3.6°	255
CH4 Tilt Fine	0°	3°	255
Ch5 X/Y Speed	X/Y Speed Fast to slow		
Ch6 ATOMIZATION	0	255	255
Ch7 Strobe	0	240-255	255
Ch8 Dimmer	0	240-255	255
Ch9 Color	0-7	8-15 16-23 24-31 32-39 40-47 48-55 56-63 64-71 72-79	255
Ch10 Color	0-6	7-13 14-20 21-27 28-34 35-41 42-48 49-55 56-62 63-69	255
Ch11 GOBO	0-6	7-13 14-20 21-27 28-34 35-41 42-48 49-55 56-62 63-69	255
Ch12 GOBO shake	0	1 16 192 255	255
Ch13 Focus	0	31 32 255	255
Ch14 Prism	0	1 127 128 192 255	255
Ch15 Prism rota	0	1 127 128 192 255	255
Ch16 Reset	100-105	200-205	255

SW-440/380

技术参数:



灯 泡 20R 440W
功 耗: 90V-240V 50HZ, 560VA
光学器件: 高效率镜头组, 变焦0° 至 2°
电子聚焦: 20米处, 160000LUX
通道模式: 16个两种国际标准DMX512通道
水平扫描: 540° (16bit精度扫描)
垂直扫描: 280° (16bit精度扫描)
色 片 盘: 17个色片+白光,
带双向旋转的彩虹效果
旋转图案盘: 14个图案片+白圆,
带图案抖动和图案任意定位功能
棱 镜 盘: 五个可旋转棱镜, 两个棱镜盘, 一个圆形
48棱镜, 一个16棱镜, 可叠加。可正反
方向旋转, 并具有棱镜定位功能。
频 闪: 双铡刀频闪频率最高可以13次每秒,
并可选择随机频闪及脉冲频闪
调 光: 0%~100%线性调光
雾 化: 0%~100%线性雾化
效果盘 : 六彩盘
电子整流器: 使产品重量更轻, 亮度更强,
灯泡更稳定, 更环保, 更节能
开关电源: AC100~240V, 50/60HZ
灯体尺寸: 长400×宽320×高650 (mm)
包装尺寸: 长470×宽450×高680 (mm)
净 重: 21公斤
毛 重: 24公斤

TECHNICAL PARAMETER:

VOLTAGE: AC90- 240V 50/60Hz
LIGHT SOURCE: 20R, 440W
POWER CONSUMPTION: 560W
OPTICAL DEVICE: high efficiency lens group, 0°-2° zoom
ELECTRONIC FOCUS: 20 meters, 160000 LUX
CHANNEL MODE: 16 standard DMX512 channel
LEVEL SCANNING: 540 (16 bit precision scan)
VERTICAL SCAN: 280 (16 bit precision scan)
COLOR WHEEL: 17 color and white light
with two-way rotating and rainbow effect
ROTATING GOBO WHEEL: 14 gobos and white circle
with design jitter and arbitrary positioning function
PRISM: 5 prism, 2 prism wheel, 48-facet circular prism,
6-facet linear prism, with superposition, positive
and negative rotation and prism location function.
SHUT: Double pole shut up to 13 times per second,
random shut and pulse shut can be choosed
DIMMER: 0% ~ 100% linear dimmer
FROST: 0% ~ 100% linear frost
EFFECT: 6 color wheel
Electronic ballast: make the product more light and bright.
Lamp more stable environmental protection and
more energy saving
SWITCHING POWER SUPPLY: AC100 ~ 240 V, 50/60 HZ
FIXTURE DIMENSION: L400×W320×H650 (mm)
PACKING DIMENSION: L470×W450×H680 (mm)
NET WEIGHT: 21KG
GROSS WEIGHT: 24KG

SW-440/380 DMX Channel Control			
CH1 Pan	0°	540°	255
CH2 Tilt	0°	250°	255
CH3 Pan Fine	0°	3.6°	255
CH4 Tilt Fine	0°	3°	255
Ch5 X/Y Speed	X/Y Speed Fast to slow		
Ch6 6 color	0	240-255	255
Ch7 Strobe	0	240-255	255
Ch8 Dimmer	0	240-255	255
Ch9 Color	0-7	8-15 16-23 24-31 32-39 40-47 48-55 56-63 64-71 72-79	255
Ch10 Color	0-6	7-13 14-20 21-27 28-34 35-41 42-48 49-55 56-62 63-69	255
Ch11 GOBO	0	128-255	255
Ch12 Prism1	0	31 128 192 255	255
Ch13 Prism2	0	31 128 192 255	255
Ch14 Prism2 rotate	0	127 128 192 255	255
Ch15 Focus	0	31 32 255	255
Ch16 Reset	100-105	200-205	255

SW-440/380 >>光效图

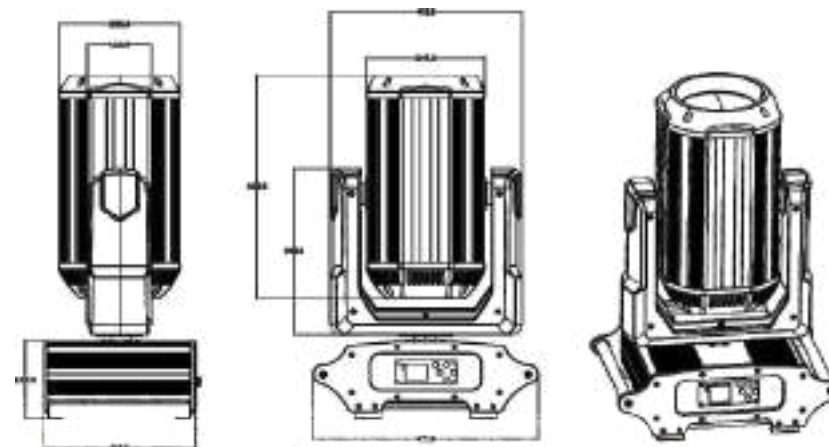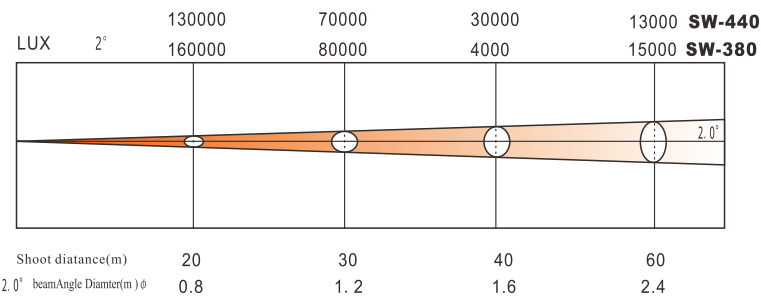

THUNDER-100H

LED光束摇头灯
20米照度 12000 LUX



技术参数:

额定电压: AC90-240V, 50/60Hz
光源: 100W LED 白光模组
额定功率: 180w
使用寿命: 50,000小时
净重: 13公斤
毛重: 15公斤
灯体尺寸: 长330×宽230×高515(mm)
包装尺寸: 长385×宽320×高535(mm)
光斑角度: 1.5° (20米均匀照度 12000 LUX)
颜色轮: 12个颜色片+白光, 半色效果, 可做双向变速彩虹效果。
图案: 固定图案轮: 13个可更换图案片+白光, 可做双向变速效果。
棱镜: 两个棱镜, 双向旋转, 速度可调, 六色效果盘
调焦: 线性调焦
雾化: 0%-100%可调
调光: 0-100%线性调光
频闪: 0.5-20次/秒, 速度可调
旋转角度: 水平540°, 垂直270° (自动回位纠错功能, 具有16bit精度调节)
控制: 国际标准DMX512信号, 3芯接口
通道: 16CH
显示: 触摸显示屏, 显示可选倒置
防护等级: IP20, 内置过热和触发高压保护, LED温度显示

TECHNICAL PARAMETER:



VOLTAGE: AC90-240V 50/60Hz
LIGHT SOURCE: 100W LED ENGINE
POWER CONSUMPTION: 180W
NET WEIGHT: 13KG
GROSS WEIGHT: 15KG
FIXTURE DIMENSION: L330×W230×H515(mm)
PACKING DIMENSION: L385×W320×H535(mm)
BEAM ANGLE: 1.5° (20 meters, 12000 LUX)
1 COLOR WHEEL: 12 colors+open, half color effect, bi-directional rainbow effect at variable speed
1 FIX GOBO WHEEL: 13 fix gobos+open, bi-directionally rotating at variable speed
1 PRISM WHEEL: 2 prism, bi-directionally rotating, at variable speed, 6 color wheel.
FOCUS: Linearly adjustable
DIMMER: 0~100% linearly adjustable
WASH: 0~100% adjustable
STROBE: 0.5~20 flash per second, speed adjustable
PAN AND TILT: Smooth, automatic Pan & Tilt position correction, speed adjustable
RANGE: Pan-540°, Tilt-270°
CONTROL PROTOCOL: DMX 512, 3 pin interface
CHANNELS: 16CH
DISPLAY: Touch screen, the words can be upside down
PROTECT GRADE: IP20, overheating & overvoltage protection

>>光效图

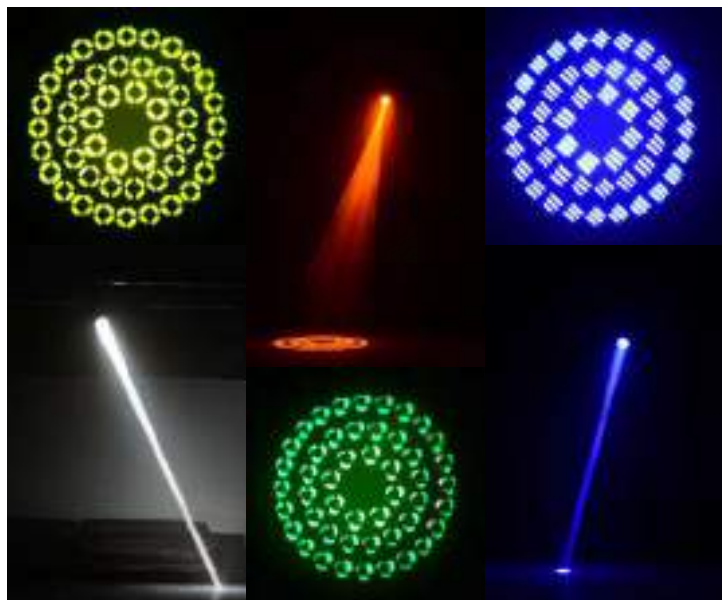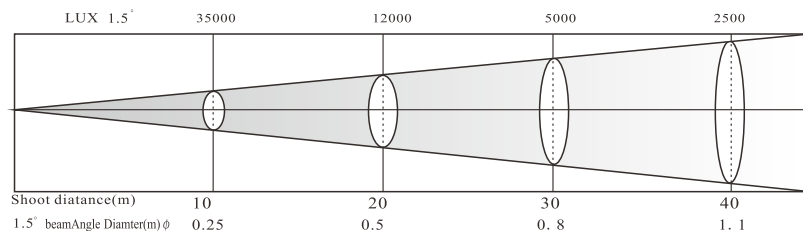

THUNDER-100H DMX Channel Control	
CH1 Pan	0° 255°
CH2 Tilt	0° 255°
CH3 Pan Fine	0° 255°
CH4 Tilt Fine	0° 255°
CH5 X/Y Speed	Fast to slow
CH6 Strobe	0 240 255
CH7 Dimmer	0 240 255
CH8 Color	0-7 8-15 16-23 24-31 32-39 40-47 48-55 56-63 64-71 72-79 80-87 88-95 96-103 104-111 112-127 128-191 192-255
CH9 6 color	0 255
CH10 GOBO	0-6 7-13 14-20 21-27 28-34 35-41 42-48 49-55 56-62 63-69 70-76 77-83 84-90 91-97 98-104 105-111 112-118 119-127 128-255
CH11 GOBO shake	0 1 192 255
CH12 Prism	0 31 32 255
CH13 Prism rota	0 1 127 128 192 255
CH14 Atomization	0 255
CH15 Focus	0 255
CH16 Reset	255 Later 2s System Reset

THUNDER-100E

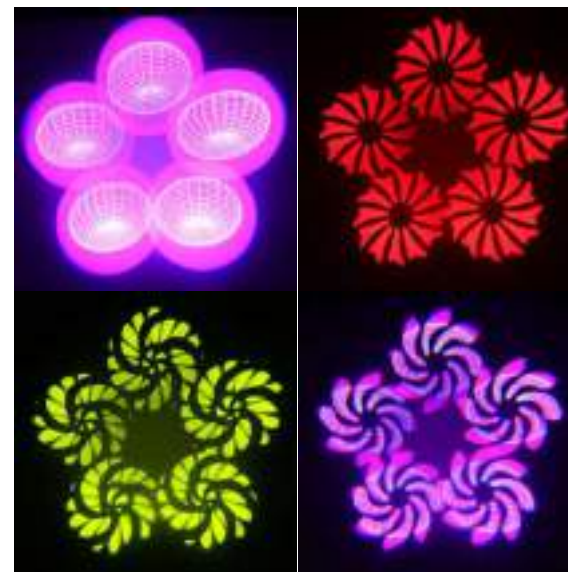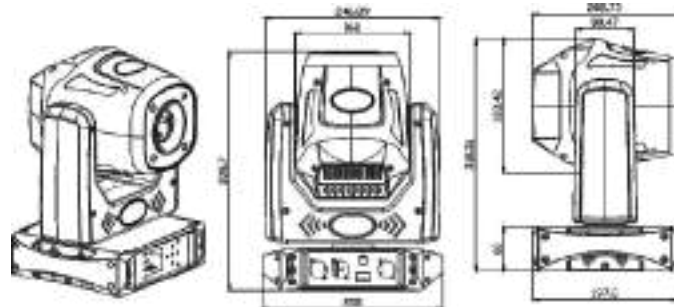

技术参数:

额定电压: AC90-240V, 50/60Hz
光源: 100瓦 LED 白光
额定功率: 150w
使用寿命: 50,000小时
光斑角度: 20°
颜色轮: 7个颜色片+白光, 半色效果, 可做双向变速彩虹效果。
图案: 旋转图案轮: 6个可更换图案片 (其中2个玻璃图案)+白光, 可做双向变速效果。
图案: 固定图案轮: 7个可更换图案片+白光, 可做双向变速效果。
棱镜: 五棱镜, 双向旋转, 速度可调
调焦: 线性调焦
调光: 0-100%线性调光
频闪: 0.5-20次/秒, 速度可调
旋转角度: 水平540°, 垂直270° (自动回位纠错功能, 具有16bit精度调节)
控制: 国际标准DMX512信号, 3芯接口
通道: 14CH
净重: 5.6公斤
毛重: 7.5公斤
灯体尺寸: 长260×宽200×高360(mm)
包装尺寸: 长310×宽250×高410(mm)

TECHNICAL PARAMETER:

LIGHT SOURCE: 100W LED
POWER CONSUMPTION: 150W
RATED LIFE: 50,000hours
BEAM ANGLE: 20°
1 COLOR WHEEL: 7 colors+open, half color effect, bi-directional rainbow effect at variable speed
1 ROTATING GOBO WHEEL: 6 rotating gobos+open, bi-directionally rotating at variable speed
1 FIX GOBO WHEEL: 7 fix gobos+open, bi-directionally rotating at variable speed
1 PRISM WHEEL: 5-facet prism, bi-directionally rotating, at variable speed
FOCUS: Linearly adjustable
DIMMER: 0~100% linearly adjustable
STROBE: 0.5~20 flash per second, speed adjustable
PAN AND TILT: Smooth, automatic Pan & Tilt position correction, speed adjustable
RANGE: Pan-540°, Tilt-270°
CONTROL PROTOCOL: DMX 512, 3 pin interface
CHANNELS: 14CH
NET WEIGHT: 5.6KG
GROSS WEIGHT: 7.5KG
FIXTURE DIMENSION: L260 W200 H360(mm)
PACKING DIMENSION: L310×W250×H410(mm)

THUNDER-100E DMX Channel Control

CH1 Dimmer	0 240 255
CH2 Strobe	0 240 255
CH3 Pan	0° 255°
CH4 Tilt	0° 255°
CH5 X/Y Speed	Fast to slow
CH6 Color	0-14 15-29 30-44 45-59 60-74 75-89 90-109 110-127 128-255
CH7 GOBO	0-14 15-29 30-44 45-59 60-74 75-89 90-109 110-127 128-255
CH8 GOBO1	0-14 15-29 30-44 45-59 60-74 75-89 90-109 110-127 128-255
CH9 GOBO ROTATE	0 63 64 128 129 255
CH10 Prism	0 31 32 255
CH11 Focus	0 255
CH12 Pan Fine	0° 255°
CH13 Tilt Fine	0° 255°
CH14 Reset	255 Later 2s System Reset

FS-4500


技术参数:

工作电压: AC90-240V 50Hz/60Hz
光 源: LED 模组
功 率: 600W
变焦角度: 3° 至 12° 可调
光圈角度: 2° 至 12° 可调
投射距离: 200-300米
颜色: 5种颜色++白光
CTO色温校正: 3200-7500K无极调节
照度: 80M/2000LUX
有效光通量: 20000 lm
光学系统手动控制, 功能电控面板
革命化光源和光学系统使其成为光效最强LED 追光灯照度媲美任何专业追光灯
适用于大型舞台、户外表演等场合。
灯具尺寸: 长990×宽350×高320 (mm)
航空箱包装 (含支架) 尺寸: 长1140×宽600×高730 (mm)
净 重: 35 公斤
毛 重: 68 公斤
(含航空箱和支架)

TECHNICAL PARAMETER:

Operating voltage: AC90-240V 50Hz/60Hz
Light source: LED module
Power: 600W
Zoom angle: 3-12 degrees adjustable
Aperture angle: 2-12 degrees adjustable
Projection distance: 200-300 meters
Color: 5 colors+ white
CTO color temperature correction: 3200-7500K stepless adjustment
Illumination: 80M/2000LUX
Effective luminous flux: 20000 lm
Optical system manual control, functional electronic control panel Revolutionary light sources and optical systems make it become the most bright efficient LED follow spot lightThe illumination is comparable to any professional follow spot light
Suitable for large-scale stage, outdoor performances and other occasions.
size: 990 × 350 × 320 (mm)
Flightcase packaging (including stand) size: 1140 × 600 × 730 (mm)
Net weight: 35 kg
Gross weight: 68 kg (including flightcase and stand)

FS-4500 >>光效图

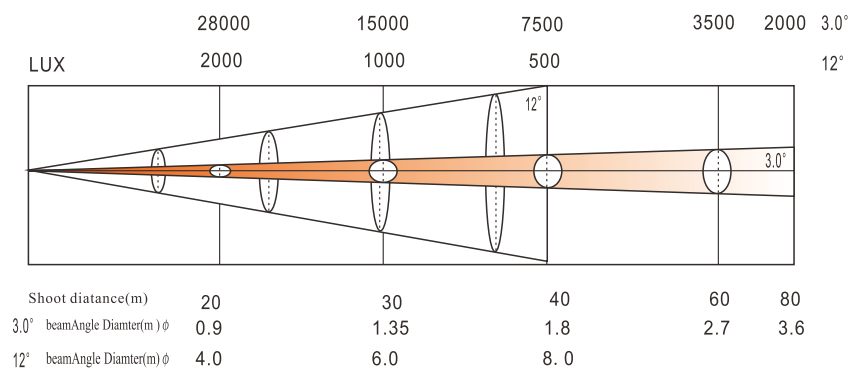

FS-2500



技术参数:

工作电压: AC90-240V 50Hz/60Hz
光 源: LED 模组
功 率: 250W
变焦角度: 3° 至 15° 可调
光圈角度: 2° 至 15° 可调
投射距离: 70-150米
颜色: 5种颜色++白光
CTO色温校正: 3200-7500K无极调节
照度: 20M/8000LUX
有效光通量: 7500 lm
光学系统手动控制, 功能电控面板
革命化光源和光学系统使其成为光效较高LED追光灯照度媲美任何专业追光灯
适用于大型舞台、户外表演等场合。
灯具尺寸: 长610×宽275×高240 (mm)
包装尺寸: 长760×宽330×高300 (mm)
净 重: 16 公斤
毛 重: 18 公斤

TECHNICAL PARAMETER:

Operating voltage: AC90-240V 50Hz/60Hz
Light source: LED module
Power: 250W
Zoom angle: 3-15 degrees adjustable
Aperture angle: 2-15 degrees adjustable
Projection distance: 70-150 meters
Color: 5 colors+ white
CTO color temperature correction: 3200-7500K stepless adjustment
Illumination: 20M/8000LUX
Effective luminous flux: 7500 lm
Optical system manual control, functional electronic control panel Revolutionary light sources and optical systems make it become the more bright efficient LED follow spot lightThe illumination is comparable to any professional follow spot light Suitable for large-scale stage, outdoor performances and other occasions.
size: 610 × 275 × 240 (mm)
packaging size: 760 × 330 × 300 (mm)
Net weight: 16 kg
Gross weight: 18 kg

FS-2500 >>光效图

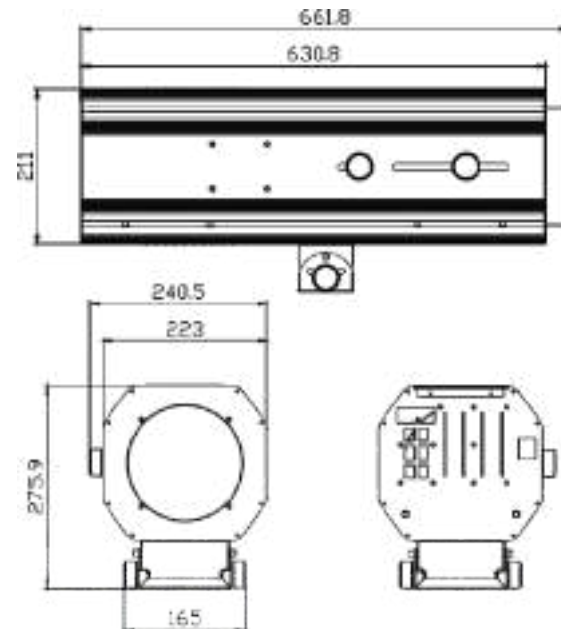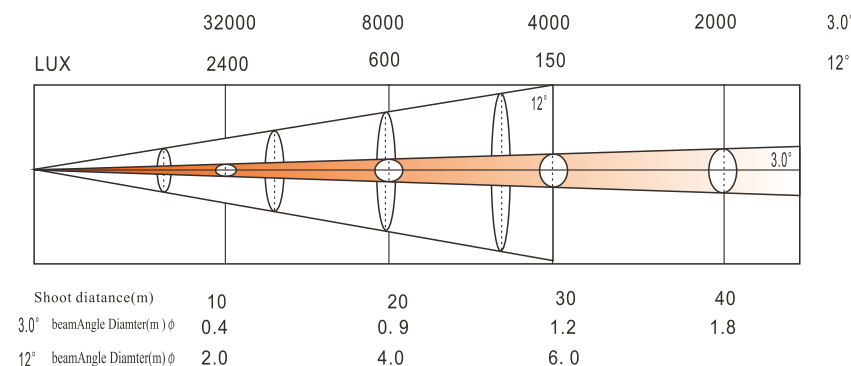

FS-400X/300X



技术参数:


工作电压: AC90-240V 50Hz/60Hz
光源: 400W/300W led
功率: 450W/350W
光斑角度: 3° 至 15° 可调
投射距离: 50-80米
4种颜色+白光, 可调光, 可变焦。
轻便, 亮度高 20M/3000-4000LUX
手动控制, 直观易用
轴流风扇致冷, 内部优化风路设计,
散热充分良好; 符合各种安全保护,
Ip20保护等级;
适用于舞台、婚庆、多功能演艺厅及
迪斯科等场所。
灯具尺寸: 长722×宽256×高260 (mm)
包装尺寸: 长860×宽330×高330 (mm)
净重: 11 公斤
毛重: 14 公斤

TECHNICAL PARAMETER:



Voltage: AC90-240V 50Hz/60Hz
Light source: 400W/300W led
Power: 450W/350W
Beam angle: 3 to 15 degrees adjustable
Cast distance: 50-80 meters
4colors+open, adjustable, zoomable.
Lightweight, high brightness, 20M/3000-4000LUX
Manual control, very easy to use
Convection cooling-fan, optimize internal air duct way,
heat elimination rapidly
Conforms to a variety of security protection,
Ip20 protection level
Suitable for stage, wedding, multi-functional performance hall,
and disco and other occasions.
size: L722 × W256 × H260 (mm)
Packing dimension: L860×W330×H330(mm)
Net weight: 11 kg
Gross weight: 14 kg

FS-400X >>光效图


LUX 6°	18000	3600	2000	1000
LUX 15°	6000	1200	600	300

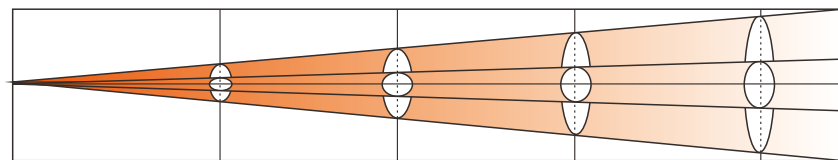

Shoot distance(m)	10	20	30	40
15° beamAngle Diameter(m)φ	1.8	3.6	5.4	7.2
6° beamAngle Diameter(m)φ	0.9	1.8	2.7	3.6

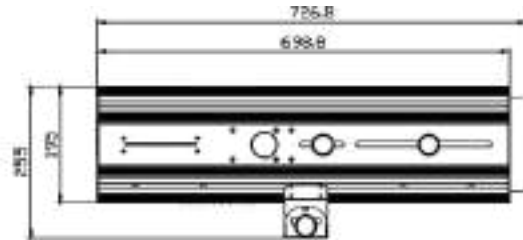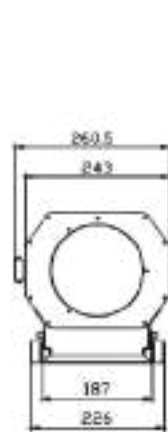

YB-300/YS-300

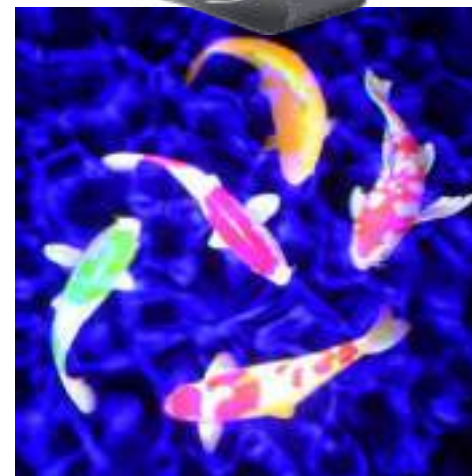


技术参数:

光源类型: LED*300W芯片 1PCS
最大功率: 320W
输入电压: AC110V-240V 50-60Hz
灯泡寿命: 50000h
频闪速度: 1-20Hz秒
灯泡色温: 6500K-7000K, 色温可选
出光角度: 28° 36° 48° (可选)
按键方式: 触摸按键模式
光斑形状: 圆形/拼接方形
散热方式: 传导式风冷
调光曲线: 0-100%
调节方式: 手动调节
通道数量: 5通道
连接方式: 手拉手连接
内部防护: 电子防潮工艺处理
颜色数量: 1个颜色盘 (5色+白光), 可选飘影镜
效果图案: 1图案盘 (4个LOGO片) 和可变速旋转效果 (YB-300)
效果图案: 2片水波纹, 双图像可变速旋转 (YS-300)
防水等级: IP65
工作环境: -25°/+35°
显示方式: LED触摸屏数码显示
保护功能: 具有电子定位功能, 光源过热保护
控制方式: 国际标准DMX512/手动/主从模式控制
温度方式: 光源温度实时监控
其它控制: 脱机自动运行
调节角度: 上下调节 > 180°
外壳材质: 压铸模+铝型材
产品尺寸: 34*30*36cm
产品重量: 11kg

TECHNICAL PARAMETER:

Light source: LED*300W, 1PCS
Maximum power: 320W
Voltage: AC110V-240V 50-60Hz
Lifespan: 50000h
Strobe speed: 1-20Hz seconds
Color temperature: 6500K-7000K (optional)
Output Angle: 28°/36°/48° (optional)
Button mode: touch button
Heat dissipation method: conduction air cooling
Dimming: 0-100%
Adjustment mode: manual adjustment
Number of channels: 5
Connection mode: hand in hand connection
Internal protection: electronic moisture-proof process
Color quantity: 1 color plate (5 colors + white light),
Floating image mirror can be selected
Effect pattern: 1 pattern plate (4 LOGO pieces) and variable
rotation effect (YB-300)
Effect pattern: 2 pieces of water ripple, the dual image can
rotates at variable speed (YS-300)
Waterproof rating: IP65
Working environment: -25°/+35°
Display mode: LED touch screen digital display
Protection function: with electronic positioning function,
light source overheating protection
Control mode: international standard DMX512/ manual/
master slave mode control
Temperature mode: real-time monitoring of light source
temperature
Other controls: Offline automatic operation
Adjust Angle: Adjust up and down > 180°
Shell material: die-casting mold + aluminum profile
Size: 34*30*36cm
Weight: 11kg

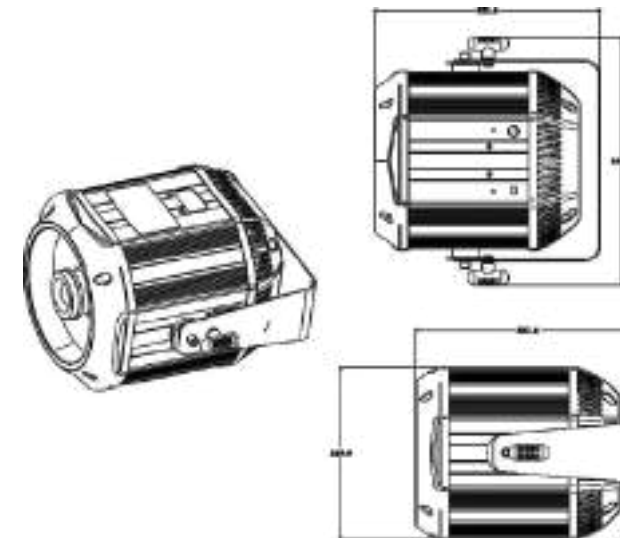

FM-200D



技术参数:

光源: 1 x 200W 3000/4000/5700K LED
灯珠寿命: 平均寿命≥50000小时
通道模式: 5 通道
控制模式: DMX512, 主从机, 声控, 自走
信号输入输出: 三芯、五芯 (可选) 卡侬头
插座
电源插座: PowerCon 输入/输出
防护等级: IP20
显指: CRI≥90 超高亮度, 可替代传统
1000W的PAR灯
线性调焦系统: 变焦范围: 9°~50°
调光系统: 0~100%线性LED调光系统
频闪: 1~25次/秒高速LED闭环/频闪效果,
速度可调
效果: 多种速度频闪效果
系统: 快速静音操作, 无闪烁
输入电源: AC 100~240V, 50/60Hz
功率: 250W
尺寸: 360*290*340mm
净重: 5kg
毛重: 7 公斤

TECHNICAL PARAMETER:

Voltage: AC 100~240V, 50/60hz
Power: 250 w
Light source: 1 x 200W 3000/4000/5700k LED
Lamp bead life: average life ≥50000h
Channel: 5 channels
Control mode: DMX512, master slave, voice control, self-walk
Signal input and output: three core, five core (optional)
Power socket: PowerCon input/output
Protection level: IP20
Indication: CRI≥90 ultra high brightness, can replace the
traditional 1000W PAR light
Linear focusing system:
Zoom range: 9°~50°
Dimming system: 0-100% linear LED dimming system
Strobe: 1-25 times/second high speed LED shut-off/strobe
effect, speed adjustable
Effects: various speed stroboscopic effects
System: fast mute operation, no flickerInput
Size: 360 * 290 * 340 mm
Net weight: 5 kgs
Gross weight: 7 kg

FM-300D



技术参数:

光源: 1 x 300W RGBW LED
灯珠寿命: 平均寿命≥50000小时
通道模式: 8 通道
控制模式: DMX512, 主从机, 声控, 自走
信号输入输出: 三芯、五芯 (可选) 卡侬头
插座
电源插座: PowerCon 输入/输出
防护等级: IP20
显指: CRI≥90 超高亮度, 可替代传统
1500W的PAR灯
线性调焦系统: 变焦范围: 9°~50°
调光系统: 0~100%线性LED调光系统
频闪: 1~25次/秒高速LED闭环/频闪效果,
速度可调
效果: 多种速度频闪效果
系统: 快速静音操作, 无闪烁
输入电源: AC 100~240V, 50/60Hz
功率: 350W
尺寸: 440*280*360mm
净重: 5.5公斤
毛重: 7 公斤

TECHNICAL PARAMETER:

Voltage: AC 100~240V, 50/60hz
Power: 350 w
Light source: 1 x 300W RGBW LED
Lamp bead life: average life ≥50000h
Channel: 8 channels
Control mode: DMX512, master slave, voice control, self-walk
Signal input and output: three core, five core (optional)
Power socket: PowerCon input/output
Protection level: IP20
Indication: CRI≥90 ultra high brightness, can replace the
traditional 1500W PAR light
Linear focusing system:
Zoom range: 9°~50°
Dimming system: 0-100% linear LED dimming system
Strobe: 1-25 times/second high speed LED shut-off/strobe
effect, speed adjustable
Effects: various speed stroboscopic effects
System: fast mute operation, no flickerInput
Size: 440 * 280 * 360 mm
Net weight: 5.5 kg
Gross weight: 7 kg

WED-230

LED防水观众光灯



WED-220

LED防水投光灯



FM-200B

LED投光灯



技术参数:

光源: 2 x 200W 3000/4000/5700K COB
灯珠寿命: 平均寿命≥50000
光 学: 带有30° 光学透镜
通道模式: 3 通道
控制模式: DMX512, 主从机, 声控, 自走
信号输入输出: 三芯防水卡侬头插头
连接数量: 一个连路可连接20台
防护等级: IP65
显指: CRI≥90 超高亮度, 可替代传统
500W X2的观众灯
调光系统: 0~100%线性LED调光系统
频闪: 1~25次/秒高速LED闭环/频闪效果,
速度可调
效果: 多种速度频闪效果
系统: 快速静音操作, 无闪烁
输入电源: AC 100~240V, 50/60Hz
功率: 230W
尺寸: 200*364*183mm
净重: 6.5kg
毛重: 8 公斤

技术参数:

电 压: 90~240V AC, 50~60Hz
功 率: 220W
灯 珠: 55W X4 COB
2个标准DMX512通道
颜 色: 4500K/6000K白光
多种频闪: 1~25次/秒
控制模式: DMX512信号控制模式,
连接数量: 一个连路可连接20台
电子调光0~100%线性调节
显 示 板: LED显示面板
冷却方式: 机体自然冷却
保护措施: 过流、过压、温保
预计使用寿命: 50000个小时
外观尺寸: 长250×宽270×高320mm
包装尺寸: 长280×宽280×高400mm
净 重: 7.5kg
毛 重: 8.5kg
灯 体: 铸铝

技术参数:

电压: AC100V - 220 V
功率: 250W
光源: 4PCS 50W COB LED
暖白色+冷白色
控制方式:
dmx512 / 声音/自动/手动/主从
外壳: 铁
镜头角度: 25度
控制通道: 8CH
灯体尺寸: L275×225×325毫米
包装尺寸: L255×255×365mm
净重: 2.5公斤

TECHNICAL PARAMETER:

Voltage: AC 100~240V, 50/60hz
Power: 230 w
Light source: 2 x 100W 3000/4000/5700k COB
Lamp bead life: average life ≥50000h
Channel: 3 channels
Control mode: DMX512, master slave, voice control, self-walk
Signal input and output: three core waterproof
The number of connections: one line can be connected to 20
Protection level: IP65
Indication: CRI≥90 ultra high brightness, can replace the
traditional 500W X2 blinder light
light range: 30°
Dimming system: 0-100% linear LED dimming system
Strobe: 1-25 times/second high speed LED shut-off/strobe
effect, speed adjustable
Effects: various speed stroboscopic effects
System: fast mute operation, no flickerInput
Size: 200 * 364 * 183 mm
Net weight: 6.5 kgs
G. W: 8kg

TECHNICAL PARAMETER:

Voltage: 90 ~ 240V AC, 50 ~ 60HZ
Power: 230W
Lamp beads: 55W COB
2standard DMX512 channels
Color: 4500K/6000K white
A variety of Flash: 1 ~ 25 times / sec (conventional strobe,
Control Mode: DMX512 signal control mode,
The number of connections: one line can be connected to 20
Electronic dimming from 0 to 100% linear regulator
Display panel: LED display panel
Cooling means: automatic radiating body
Protection: over current, over voltage, temperature and
security
Expected useful life: 50,000 hours
DIMENSIONS: L250×270×320mm
PACKING SIZE: L280 ×280 ×400mm
Net weight: 7.5kg
Gross weight: 8.5kg
Lamp body: aluminum

TECHNICAL PARAMETER:

Voltage: AC100V-220V
Power: 250 W
Light source : 4PCS 50W COB LED
Warm white + cold white
control mode:
DMX512 / voice/automatic/manual/master slave
Iron shell
Lens Angle: 25 degrees
Control channel :8CH
Size : 27.5×22.5×32.5 cm
Packing size :25.5×25.5×36.5cm
Net weight :2.5 kg

HLD-72M



技术参数:

电压: 90~240V AC, 50~60Hz
功率: 240W
灯珠: 72X3W RGB 3合1
光学透镜: 标准25° 可选 45°、60°
7个标准DMX512通道
颜色: 1670万种颜色变化, 有颜色流水功能, 速度快慢可调
频闪: 1~20次/秒线性调节
控制模式: DMX512信号控制模式, 电子调光: 0~100%线性调节
显示板: LED显示面板
冷却方式: 风扇冷却
预计使用寿命: 50000个小时
外观尺寸: 长290×宽280×高90mm
包装尺寸: 长330×宽300×高130mm
净重: 3kg
毛重: 4kg
灯体: 铸铝

TECHNICAL PARAMETER:

Voltage: 90 ~ 240V AC, 50 ~ 60HZ
Power: 240W
Lamp beads: 72X3W RGB 3 in 1
Optical lens: standard 25° optional 45° , 60°
7standard DMX512 channels
Color: 1670 kinds of colors, colored water features, speed Level speed adjustable
A variety of Flash: 1 ~ 20 times / sec linear regulator
Control Mode: DMX512 signal control mode,
Electronic dimming from 0 to 100% linear regulator
Display panel: LED display panel
Cooling: Fan cooling
Expected useful life: 50,000 hours
DIMENSIONS: L290×280×90mm
PACKING SIZE: L330 ×300 ×130mm
Net weight: 3kg
Gross weight: 4kg
Lamp body: aluminum

HLD-18SM



技术参数:

电压: 90~240V AC, 50~60Hz
功率: 85W
灯珠: 18X4W RGBW 4合1
光学透镜: 标准25° 可选 45°、60°
8个标准DMX512通道
颜色: 1670万种颜色变化, 有颜色流水功能, 速度快慢可调
频闪: 1~20次/秒线性调节
控制模式: DMX512信号控制模式, 电子调光: 0~100%线性调节
显示板: LED显示面板
冷却方式: 风扇冷却
预计使用寿命: 50000个小时
外观尺寸: 长270×宽280×高100mm
包装尺寸: 长310×宽300×高140mm
净重: 1.5kg
毛重: 2kg
灯体: 塑胶

TECHNICAL PARAMETER:

Voltage: 90 ~ 240V AC, 50 ~ 60HZ
Power: 85W
Lamp beads: 18X4W RGBW 4 in 1
Optical lens: standard 25° optional 45° , 60°
8 standard DMX512 channels
Color: 1670 kinds of colors, colored water features, speed Level speed adjustable
A variety of Flash: 1 ~ 20 times / sec linear regulator
Control Mode: DMX512 signal control mode,
Electronic dimming from 0 to 100% linear regulator
Display panel: LED display panel
Cooling: Fan cooling
Expected useful life: 50,000 hours
DIMENSIONS: L210×260×190mm
PACKING SIZE: L255 ×260 ×255mm
Net weight: 1.5kg
Gross weight: 2kg
Lamp body: plastic

FL-256/272/432

LED 三基色灯



技术参数:

额定电压: AC110V~230V/50HZ~60HZ
额定功率: 130/140/200W
光源: 0.5W 5730LED
光源数量: 256/272/432颗
光束角度: 120°
色温: 3200K-6000K,
可选3200K/6000K独立控制
显色指数: Ra≥85
调光: 0~100%线性调光
(2种调光模式, 3种调光曲线)
控制模式: DMX512、手动
通道数: 2/3个国际DMX512通道
显示方式: 4位数码显示
导光板: 高效乳白色纳米光学导光板,
解决眩光问题
工作环境温度: -20℃—45℃
工作环境: 适合用在多媒体会议室, 礼堂等场所
散热方式: 机箱散热+散热风扇(静音)
外壳材料: 铝材+纳米光学导光板
颜色: 黑色
尺寸: 560*300*80mm (FL-256/272)
510*325*115mm (FL-432)
重量: 6kg (FL-256/272), 8Kg (FL-432)

TECHNICAL PARAMETER:

Voltage: AC110-230V /50-60Hz
Power: 130/140/200w
Light source: 0.5W 5730led, 256/272/432pcs
Color temperature: 3200k-6000k,3200K/6000K independent control
Channel: 2/3channels
Light angle: 120°
Control mode: DMX512, manual dimming
Dimming: 0-100% linear dimming
Housing: aluminum
Cooling system: convection cooling-fan available.
Protection level: IP20
Weight: 6kg(FL-256/272),8Kg(FL-432)
Size: 560*300*80mm (FL-256/272)
510*325*115mm(FL-432)

FD-300

LED变焦成像灯



技术参数:

电压: AC110~220V, 50~60HZ
功率: 350W
光源: 300W LED COB光源
外壳: 压铸铝, 黑色, 铝材静音散热
光源寿命: 50000小时
色温: 3200K~6000K可选
调光: 0~100%无极线性调节
控制模式: DMX512, 主从联机
显示: LCD
显指: 85~90
光束角度: 15° ~32°
照度: 4000lux/7米
光通量: 8500lm
通道: 2通道
灯体尺寸: 72*23*23cm
重量: 净重12.5kg, 毛重15kg

TECHNICAL PARAMETER:

Voltage: AC110-220V, 50-60HZ
Power: 350W
Light source: 300W LED COB
Housing: die-cast aluminum, black, aluminum (silent cooling)
Lifespan: 50,000 hours
Color temperature: 3200K-6000K optional
Dimmer 0-100% smooth linear dimming
Control mode: DMX512, master-slave
Display: LCD
CRI (Ra>): 85-90
Beam angle: 15 degrees -32 degrees
illumination: 4000lux/7 m
luminous flux: 8500lm
Channel: 2 Channels
Size: 72 x 23 x 23cm
Net weight 12.5kg
gross weight 15kg

FD-200



技术参数:

功率: 220W
光源: 200WLED COB光源
外壳: 压铸铝, 黑色, 铝材静音散热
光源寿命: 50000小时
色温: 3200K~6000K可选
调光: 0~100%无极线性调节
控制模式: DMX512, 主从联机
显示: LCD
显指: 85~90
光束角度: 19°
照度: 2100lux/7米
光通量: 6300lm
通道: 2通道
灯体尺寸: 62*22*22cm
重量: 净重8.5kg, 毛重11.5kg铝

TECHNICAL PARAMETER:

Voltage: AC110-220V, 50-60HZ
Power: 220W
Light source: 200WLED COB light source
Housing: die-cast aluminum, black, aluminum (silent cooling)
Lifespan: 50,000 hours
Color temperature: 3200K-6000K optional
Dimmer 0-100% smooth linear dimming
Control mode: DMX512, master-slave,auto mode
Display: LCD
CRI (Ra>): 85-90
Beam angle: 19 degrees
illumination: 2100lux/7 m
luminous flux: 6300lm
Channel: 2 Channels
Product size: 62 x 22 x 22cm
Net weight 8.5kg,
Gross weight 11.5kg

FD-300M



技术参数:

功率: 320W
光源: 300WLED RGBW COB光源
外壳: 压铸铝, 黑色, 铝材静音散热
光源寿命: 50000小时
色温: 白色3200K~6000K可选
调光: 0~100%无极线性调节
控制模式: DMX512, 主从联机
显示: LCD
显指: 85~90
光束角度: 18°
照度: 4000lux/7米
光通量: 9300lm
通道: 8通道
灯体尺寸: 67*22*22cm
重量: 净重10.5kg, 毛重12.5kg铝

TECHNICAL PARAMETER:

Voltage: AC110-220V, 50-60HZ
Power: 220W
Light source: 200WLED RGBW COB
Housing: die-cast aluminum, black, aluminum (silent cooling)
Lifespan: 50,000 hours
Color temperature: WHITE 3200K-6000K optional
Dimmer 0-100% smooth linear dimming
Control mode: DMX512, master-slave,auto mode
Display: LCD
CRI (Ra>): 85-90
Beam angle: 18 degrees
illumination: 4000lux/7 m
luminous flux: 9300lm
Channel: 8 Channels
Product size: 67 x 22 x 22cm
Net weight 10.5kg,
Gross weight 12.5kg