

广州亮星灯光科技有限公司

SKYSTAR LIGHTING LIMITED

地址：中国 广东 广州市天河区 龙洞迎龙大道260号龙山工业园E-1栋二层
电话：020-87022418
传真：020-87023011
移动电话：13602863513 13609702481
网址：www.lightskystar.com
www.skystarlighting.com
电子邮箱：vinca2004@126.com, 1843755954@qq.com, 623872311@qq.com,
1725113820@qq.com, 1284963471@qq.com

Add: 2F., Building E-1, Longshan industry Park, No.260 Yinglong RD., Longdong,
Tianhe District, Guangzhou China.
Web site: www.lightskystar.com
www.skystarlighting.com
E-mail: vinca2004@126.com, 1843755954@qq.com, 623872311@qq.com,
1725113820@qq.com, 1284963471@qq.com
Tel: +8620-87022418
Fax: +8620-87023011
cellphone: +86 13609702481 (NIKI)
Whatsapp: +86 13602863513 (Jack)
+86 18902251183 (Lily)



广州亮星灯光科技有限公司

SKYSTAR LIGHTING LIMITED

SKYSTAR

THUNDER-800BSWP

800W LED Moving Head Lights
BSWP 4 in 1
光束/图案/染色/切割 4合1 LED 摇头灯

LAMP

技术参数:

TECHNICAL PARAMETER:

电压: AC100-240V 50/60Hz

光源: 800W LED 模组

功耗: 900W

光束角度: 4°-40°

颜色轮: 7 种颜色+白光, 半色效果,
可做双向变速彩虹效果。

混色系统: CTO+CMY 0-100 可调
旋转图案轮: 7 个可变换图案片+白光,
可做双向变速效果。

固定图案轮: 7 个图案片+白光,
可做双向变速效果。

效果盘: 一个滚动图案盘

棱镜: 5 面可旋转棱镜和线形菱镜, 2 个棱镜盘,
可叠加, 可正反方向旋转, 并具有棱镜定位功能。

切割系统: 8 片电动调节切割片。

光圈: 10-100% 可调

调焦: 线性平滑放大调焦

雾化: 0~100% 可调

调光: 0~100% 线性可调

频闪: 每秒 0.5~30 闪, 速度可调。

水平/垂直: 平滑、自动平移和倾斜。

位置校正, 速度可调

旋转角度: 水平-540°, 垂直-270° (16 位)

通道: 36CH

净重: 34.5KG

毛重: 39KG

灯体尺寸: L432 × W320 × H750/(mm)

包装尺寸: L500 × W400 × H810 (mm)

VOLTAGE: AC100- 240V 50/60Hz

LIGHT SOURCE: 800W LED ENGINE

POWER CONSUMPTION: 900W

BEAM ANGLE: 4°-40°

1 COLOR WHEEL: 7 colors+open, half color effect,
bi-directional rainbow effect at variable speed

CMY+CTO COLOR MIXING SYSTEM: 0-100%
1 ROTATING GOBO WHEEL: 7 rotating gobos+open,
bi-directionally rotating at variable speed

1 FIX GOBO WHEEL: 7 fix gobos+open, bi-directionally
rotating at variable speed

EFFECT: A rolling gobo

2 PRISM WHEEL: 5-facet prism and 6-facet linear prism,
bi-directionally rotating, at variable speed

CUTTING SYSTEM: rically adjustable cutting discs

APERTURE: 10~100% adjustable

FOCUS: Linear smooth zoom and focus

WASH: 0~100% adjustable

DIMMER: 0~100% linearly adjustable

STROBE: 0.5~30 flash per second, speed adjustable

PAN AND TILT: Smooth, automatic Pan & Tilt

position correction, speed adjustable

RANGE: Pan-540°, Tilt-270° (16-bit)

CHANNELS: 36CH




NET WEIGHT: 34.5KG

GROSS WEIGHT: 39KG

FIXTURE DIMENSION: L432×W320×H750/(mm)

PACKING DIMENSION: L500×W400×H810(mm)

Color Effect

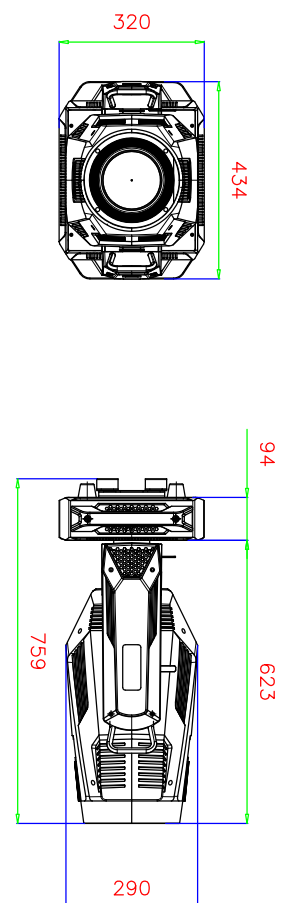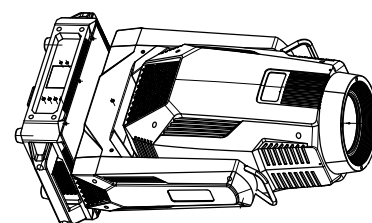

800W LED Moving Head Lights
BSWP 4 in 1
光束/图案/染色/切割 4合1 LED 摇头灯

LAMP




SKYSTAR

Rotating gobos


Fix gobos

Prism Effect

Cutting



Effect drawing

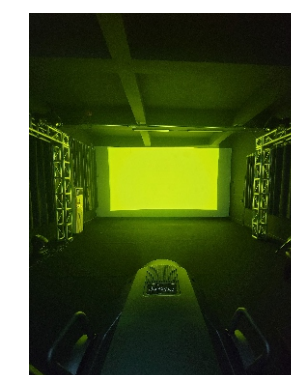

SKYSTAR

18R 380W Beam Moving Head Lights 380W 光束摇头灯

LAMP

SR-380PRO




技术参数:

灯泡: 18R 380W/OSRAM 371w
 功耗: 100-240V 50/60HZ 460W
 使用寿命: 1500小时
 光斑角度: 0°—2°
 电子聚焦: 20米处, 180000LUX
 颜色轮: 12个颜色片+白光, 半色效果, 可做双向变速彩虹效果。
 图案: 旋转图案轮: 6个可更换图案片(其中4个玻璃图案)+白光, 可做双向变速效果。(SR-380PRO)
 图案: 固定图案轮: 15个可更换图案片+白光, 可做双向变速效果。
 棱镜 四个可旋转棱镜(SR-380PRO), 两个棱镜盘, 可叠加。可正反方向旋转, 并具有棱镜定位功能
 调焦: 线性调焦
 雾化: 0%-100%可调
 效果盘: 六彩盘
 调光: 0-100%线性调光
 频闪: 0.5-20次/秒, 速度可调
 旋转角度: 水平540°, 垂直270°
 自动回位纠错功能, 具有16bit精度调节)
 切光: 具有颜色+图案+棱镜+水平/垂直切光功能
 控制: 国际标准DMX512信号, 3芯接口
 通道: 16/18/20CH(SR-380PRO) 16CH(SR-380)
 显示: 触摸显示屏, 显示可选倒置
 防护等级: IP20, 内置过热和触发高压保护, LED 温度显示
 净重 15.5公斤 (SR-380PRO) 14公斤 (SR-380)
 毛重: 17.5公斤 (SR-380PRO) 16公斤 (SR-380)
 灯体尺寸: 长324×宽238×高527(mm)
 包装尺寸: 长385×宽300×高590(mm)

TECHNICAL PARAMETER:

VOLTAGE: AC100- 240V 50/60Hz
 LIGHT SOURCE: 18R 380W/OSRAM 371W
 POWER CONSUMPTION: 460W
 BEAM ANGLE: 0°--2°
 ELECTRONIC FOCUS: 20 meters, 180000 LUX
 1 COLOR WHEEL: 12 colors+open, half color effect, bi-directional rainbow effect at variable speed
 1 ROTATING GOBO WHEEL: 6 rotating gobos+open, bi-directionally rotating at variable speed (SR-380PRO)
 1 FIX GOBO WHEEL: 15 fix gobos+open, bi-directionally rotating at variable speed
 2 PRISM WHEEL: 4PRISM (SR-380PRO), 2PRISM (SR-380) 8、16、24-facet prism, 6-facet linearprism bi-directionally rotating, at variable speed
 FOCUS: Linearly adjustable
 WASH: 0~100% adjustable
 EFFECT: 6 color whee
 DIMMER: 0~100% linearly adjustable
 STROBE: 0.5~20 flash per second, speed adjustable
 PAN AND TILT: Smooth, automatic Pan & Tilt position correction, speed adjustable
 RANGE: Pan-540°, Tilt-270°(16-bit)
 VECTOR MODE: Color+GOBO+Prism+XY Vector
 CONTROL PROTOCOL: DMX 512, 3 pin interface
 CHANNELS: 16/18/20CH (SR-380PRO) 16CH (SR-380)
 DISPLAY: Touch screen, the words can be upside down
 PROTECT GRADE: IP20, overheating & overvoltage protection
 NET WEIGHT: 15.5KG (SR-380PRO) 14KG (SR-380)
 GROSS WEIGHT: 17.5KG (SR-380PRO) 16KG (SR-380)
 FIXTURE DIMENSION: L324×W238×H527(mm)
 PACKING DIMENSION: L385×W300×H590 (mm)

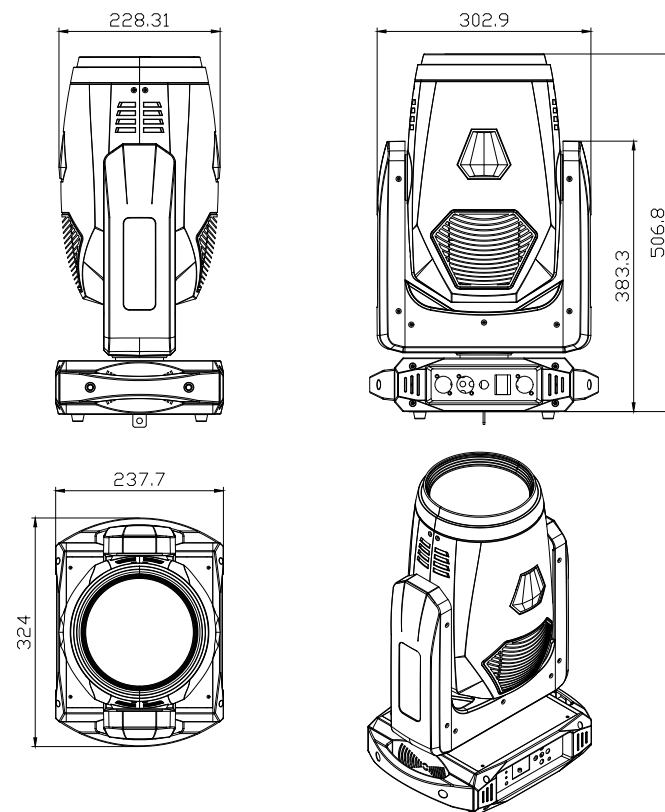

SR-380




18R 380W Beam Moving Head Lights 380W 光束摇头灯

LAMP


SKYSTAR

固定图案 (FIX GOBO)

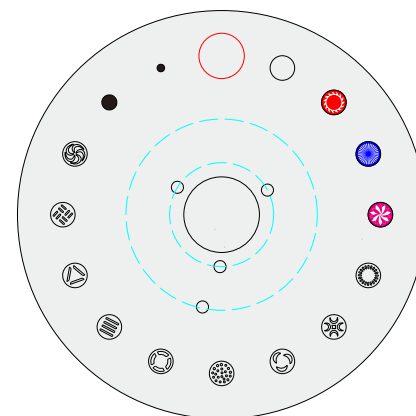


旋转图案 (ROTA GOBO)


图案片尺寸19.9mm
 图案尺寸15mm

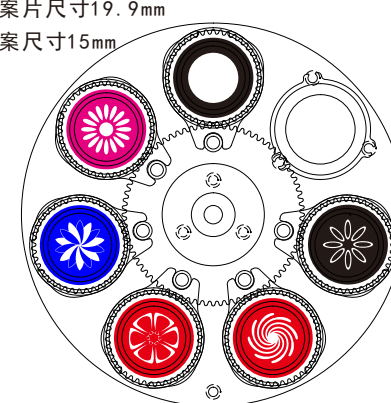

颜色 (COLOR)

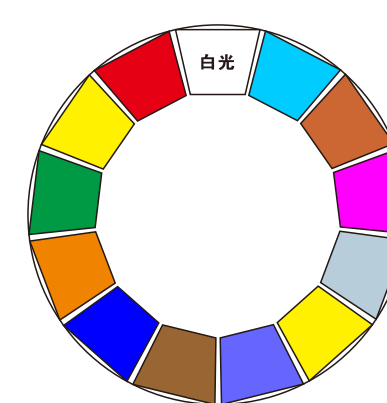

SR-380 >> 光效图

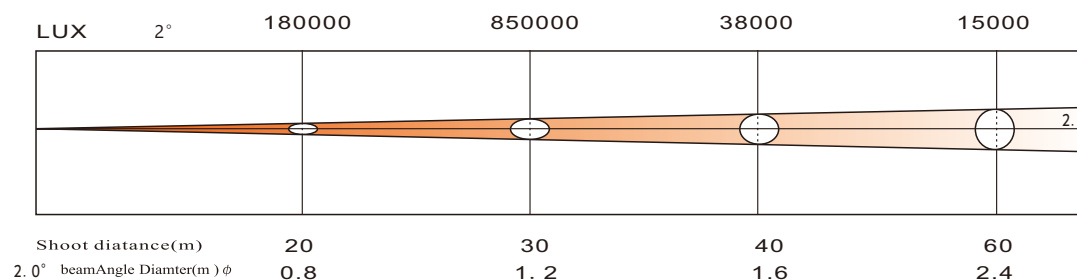

SR-380PRO DMX Channel Control	
CH1 Color	0-7 8-15 16-23 24-31 32-39 40-47 48-55 56-63 64-71 72-79
CH2 Strobe	0 240 241-255
CH3 Dimmer	0 240 241-255
CH4 GOBO	0 128-255
Ch5 PrismA	0 10 11 90 91 170 171 255
Ch6 PrismB	0 10 11 255
Ch7 Rota gobo	0-14 15-84 85-99 100-104 105-119 120-127 128-255
Ch8 Gobo rota	0-14 15-84 85-99 100-104 105-119 120-127 128-255
Ch9 Focus	0 255
Ch10 Pan	0° 540° 255
Ch11 Pan Fine	0° 3.6° 255
Ch12 Tilt	0° 250° 255
Ch13 Tilt Fine	0° 3° 255
Ch14 Mode	0 255
Ch15 6 color	0 127 128 191 192 255
Ch16 Reset	100-105 200-205 255



SKYSTAR

SG-420EVO



Beam Spot Wash 3 in 1 Moving Head Lights

光束/图案/染色 3合1摇头灯

LAMP


技术参数:

电压: AC90-240V 50/60Hz
光源: 20R 420W/18R 380W/
功耗: 550W/500W
光束角度: 2°--40°
颜色轮: 9种颜色+白光, 半色效果,
可做双向变速彩虹效果。
旋转图案轮: 7个可变换图案片+白光,
可做双向变速效果。
固定图案轮: 9个可变换图案片+白光,
可做双向变速效果。
棱镜: 5面可旋转棱镜, 2个棱镜盘,
可叠加, 可正反方向旋转,
并具有棱镜定位功能。
调焦: 线性可调
雾化: 0~100%可调
调光: 0~100%线性可调
频闪: 每秒0.5~20闪, 速度可调。
水平/垂直: 平滑、自动平移和倾斜。
位置校正, 速度可调
旋转角度: 水平-540°,
垂直-270° (16位)
通道: 16/24CH
净重: 15.5KG
毛重: 18KG
灯体尺寸: L325×W249×H598 (mm)
包装尺寸: L390×W320×H650 (mm)


TECHNICAL PARAMETER:

VOLTAGE: AC90- 240V 50/60Hz
LIGHT SOURCE: 20R 420W/18R 380W
POWER CONSUMPTION: 550W/500W
BEAM ANGLE: 2°--40°
1 COLOR WHEEL: 9 colors+open, half color effect,
bi-directional rainbow effect at variable speed
1 ROTATING GOBO WHEEL: 7 rotating gobos+open,
bi-directionally rotating at variable speed
1 FIX GOBO WHEEL: 9 fix gobos+open, bi-directionally
rotating at variable speed
2 PRISM WHEEL: 5-facet prism, 5-facet linear prism
bi-directionally rotating, at variable speed
FOCUS: Linearly adjustable
WASH: 0~100% adjustable
DIMMER: 0~100% linearly adjustable
STROBE: 0.5~20 flash per second, speed adjustable
PAN AND TILT: Smooth, automatic Pan & Tilt
position correction, speed adjustable
RANGE: Pan-540°, Tilt-270° (16-bit)
CHANNELS: 16/24CH
NET WEIGHT: 15.5KG
GROSS WEIGHT: 18KG
FIXTURE DIMENSION: L325×W249×H598(mm)
PACKING DIMENSION: L390×W320×H650(mm)

Prism Effect

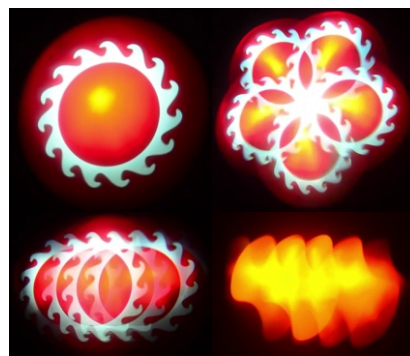

Color Effect

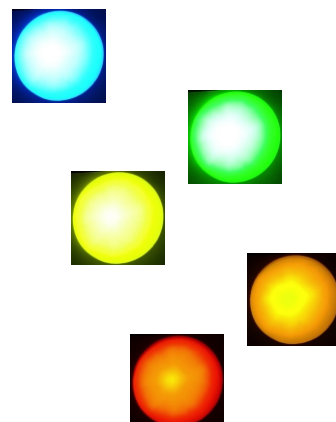



Beam Spot Wash 3 in 1 Moving Head Lights

光束/图案/染色 3合1摇头灯





LAMP

SKYSTAR

Zoom: 2°-40°

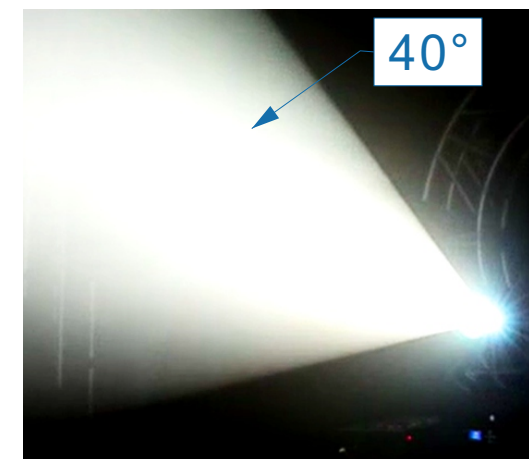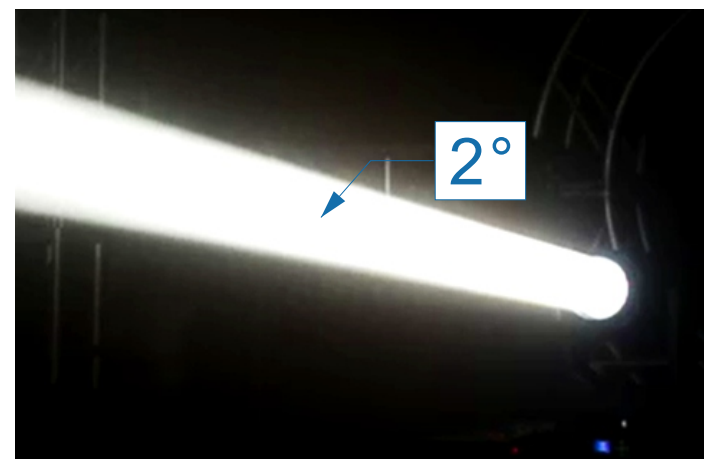

FIXTURE DIMENSION

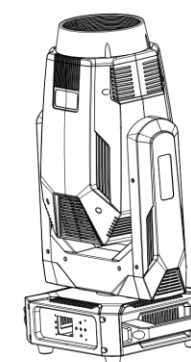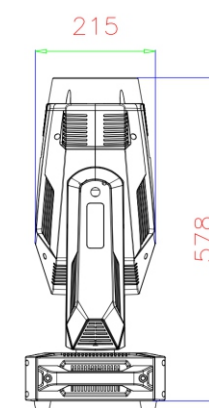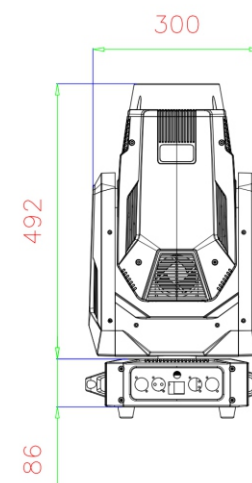

SR-420H



420W Beam
Moving Head Lights
420W 光束摇头灯

LAMP

技术参数:



电压: 100V-240V 50/60HZ
灯泡: 421 (牛尾) 舞台灯泡
功耗: 550W
光学器件: 高效率镜头组, 变焦 0° 至 2°
电子聚焦: 20 米处, 220000LUX
通道模式: 16 国际标准 DMX512 通道
水平扫描: 540° (16bit 精度扫描)
垂直扫描: 280° (16bit 精度扫描)
色片盘: 12 个色片+白光,
带双向旋转的彩虹效果
图案盘: 13 个图案片+白圆,
带图案抖动和图案任意定位功能
棱镜盘 2 个可旋转棱镜, 两个棱镜盘可叠加。
可正反方向旋转。
频闪: 频闪频率最高可以 10 次每秒,
并可选择随机频闪及脉冲频闪
调光: 0%~100%线性调光
雾化: 0%~100%线性雾化
效果盘: 六彩盘
电子整流器: 使产品重量更轻, 亮度更强,
灯泡更稳定, 更环保, 更节能
开关电源: AC100~240V, 50/60HZ
灯体尺寸: 长 380×宽 265×高 605 (mm)
包装尺寸: 长 410×宽 295×高 655 (mm)
净重: 19 公斤
毛重: 21 公斤

TECHNICAL PARAMETER:

VOLTAGE: AC100- 240V 50/60Hz
LIGHT SOURCE: USHIO421
POWER CONSUMPTION: 550W
OPTICAL DEVICE: high efficiency lens group, 0°-2° zoom
ELECTRONIC FOCUS: 20 meters, 220000 LUX
CHANNEL MODE: 16 standard DMX512 channel
LEVEL SCANNING: 540 (16 bit precision scan)
VERTICAL SCAN: 280 (16 bit precision scan)
COLOR WHEEL: 12 color and white light
with two-way rotating and rainbow effect
GOBO WHEEL: 13 gobos and white circle
with design jitter and arbitrary positioning function
PRISM: 2 prism, 2 prism wheel with superposition,
positive and negative rotation.
SHUT: shut up to 10 times per second,
random shut and pulse shut can be choosed
DIMMER: 0% ~ 100% linear dimmer
FROST: 0% ~ 100% linear frost
EFFECT: 6 color wheel
Electronic ballast: make the product more light and bright.
Lamp more stable environmental protection and
more energy saving
SWITCHING POWER SUPPLY: AC1G0 ~ 240 V, 50/60 HZ
FIXTURE DIMENSION: L380×W265×H605(mm)
PACKING DIMENSION: L410×W295×H655(mm)
NET WEIGHT: 19KG
GROSS WEIGHT: 21KG

USH IO 421

Order reference	USHIO 421	
Rated lamp wattage	W	420
Rated lamp voltage	V	70
Rated lamp current (square)	A	6.0
Ignition voltage (cold/hot)	kVs	3.0
Color temperature	K	7600
Electrode gap	mm	1.14
Lamp length (overall) * l	mm	39
Reflector diameter * d	mm	58
Working distance * a	mm	37.4
Average service life	h	2000/ Normor 4000/ Eco
Initial luminous flux	lm	29000
CRI		80

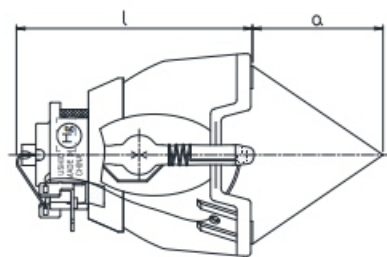

250W LED
Moving Head Lights
250W LED 摇头灯

LAMP

THUNDER-250




技术参数:

电压: AC100- 240V 50/60Hz
光源: 250W 白光模组 LED
功率: 300W
使用寿命: 30,000~500,000 小时
光斑角度: 3° -38°
颜色轮: 9 个颜色片 + 白光, 半色效果,
可做双向, 可做双向变速彩虹效果。
旋转图案轮: 7 个可更换图案片 + 白光,
可做双向变速效果。
固定图案轮: 9 个可更换图案片 + 白光,
可做双向变速效果。
棱镜: 四棱镜, 双向旋转, 速度可调
调焦: 线性调焦
雾化: 0%-100% 可调
调光: 0-100% 线性调光
频闪: 0.5-20 次/秒, 速度可调
旋转角度: 水平 540°, 垂直 270°
(自动回位纠错功能, 具有 16bit 精度调节)
切光: 具有颜色 + 图案 + 棱镜 + 水平/垂直切光功能
控制: 国际标准 DMX512 信号, 3 芯接口
通道: 16CH/20CH
净重: 12.5 公斤
毛重: 14.5 公斤
灯体尺寸: 长 295×宽 205×高 555 (mm)
包装尺寸: 长 380×宽 320×高 600 (mm)


TECHNICAL PARAMETER:

VOLTAGE: AC100- 240V 50/60Hz
LIGHT SOURCE: 250W ENGINE LED
POWER CONSUMPTION: 300W
RATED LIFE: 30,000~500,000 hours
BEAM ANGLE (ZOOM): 3° -38°
1 COLOR WHEEL: 9 colors+open, half color effect,
bi-directional rainbow effect at variable speed
1 ROTATING GOBO WHEEL: 7 rotating gobos+open,
bi-directionally rotating at variable speed
1 FIX GOBO WHEEL: 9 fix gobos+open,
bi-directionally rotating at variable speed
1 PRISM WHEEL: 4-facet prism, bi-directionally rotating,
at variable speed
FOCUS: Linearly adjustable
DIMMER: 0~100% linearly adjustable
WASH: 0~100% adjustable
STROBE: 0.5~20 flash per second, speed adjustable
PAN AND TILT: Smooth, automatic Pan & Tilt
position correction, speed adjustable
RANGE: Pan-540°, Tilt-270°
VECTOR MODE: Color+GOBO+Prism+XY Vector
CONTROL PROTOCOL: DMX 512, 3 pin interface
CHANNELS: 16/20CH
FIXTURE DIMENSION: L295×W205×H555 (mm)
PACKING DIMENSION: L380×W320×H600 (mm)
NET WEIGHT: 12.5KG
GROSS WEIGHT: 14.5KG


Fix gobos

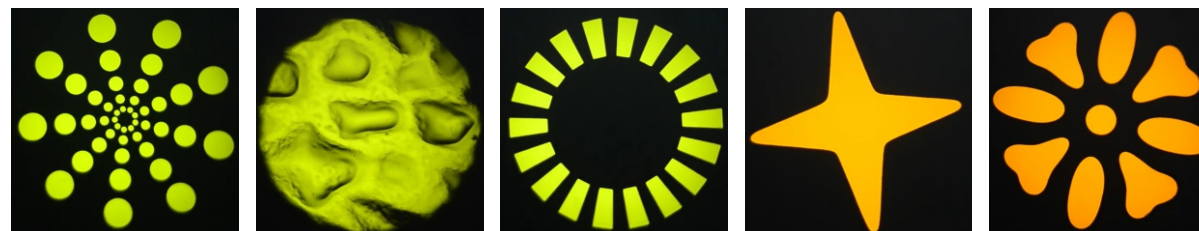

Rotating gobos

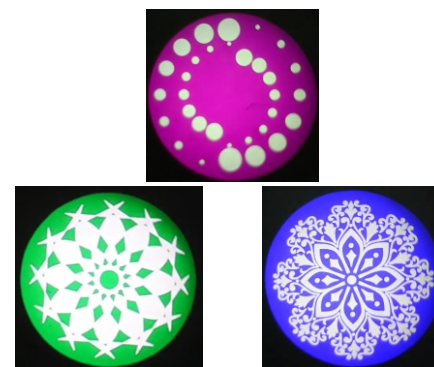

Prism Effect

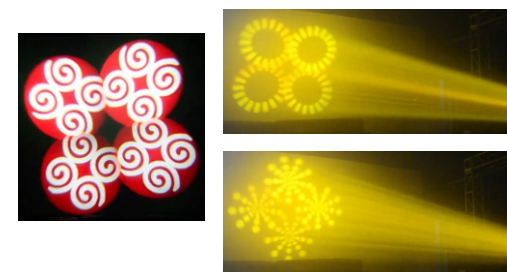

SR-230Mini



7R 230W Beam
Moving Head Lights
230W 光束摇头灯

LAMP


技术参数:

开关电源: AC100~240V, 50/60HZ
灯 泡: 7R 230W
功 率: 280W
光学器件: 高效率镜头组, 变焦0° 至 2°
电子聚焦: 20米处, 40000LUX
通道模式: 16国际标准DMX512通道
水平扫描: 540° (16bit精度扫描)
垂直扫描: 280° (16bit精度扫描)
色 片 盘: 12个色片+白光,
带双向旋转的彩虹效果
图案盘: 13个图案片+白圆,
带图案抖动和图案任意定位功能
棱镜盘2个可旋转棱镜, 两个棱镜盘可叠加。
可正反方向旋转。
频 闪: 频闪频率最高可以10次每秒,
并可选择随机频闪及脉冲频闪
调 光: 0%~100%线性调光
雾 化: 0%~100%线性雾化
效果盘 : 六彩盘
电子整流器: 使产品重量更轻, 亮度更强,
灯泡更稳定, 更环保, 更节能
灯体尺寸: 长286×宽218×高465 (mm)
包装尺寸: 长345×宽280×高530 (mm)
净 重: 9.8公斤
毛 重: 11.5公斤

TECHNICAL PARAMETER:

VOLTAGE: AC100- 240V 50/60Hz
LIGHT SOURCE: 7R,230W
POWER CONSUMPTION: 280W
OPTICAL DEVICE: high efficiency lens group, 0°-2°zoom
ELECTRONIC FOCUS: 20 meters, 40000 LUX
CHANNEL MODE: 16 standard DMX512 channel
LEVEL SCANNING: 540 (16 bit precision scan)
VERTICAL SCAN: 280 (16 bit precision scan)
COLOR WHEEL: 12color and white light
with two-way rotating and rainbow effect
GOBO WHEEL: 13 gobos and white circle
with design jitter and arbitrary positioning function
PRISM: 2 prism, 2 prism wheel with superposition,
positive and negative rotation.
SHUT: shut up to 10 times per second,
random shut and pulse shut can be choosed
DIMMER: 0% ~ 100% linear dimmer
FROST: 0% ~ 100% linear frost
EFFECT: 6 color wheel
Electronic ballast : make the product more light and bright.
Lamp more stable environmental protection and
more energy saving
SWITCHING POWER SUPPLY : AC100 ~ 240 V, 50/60 HZ
FIXTURE DIMENSION: L286 ×W218 ×H465(mm)
PACKING DIMENSION: L345 ×W280 ×H530(mm)
NET WEIGHT: 9.8KG
GROSS WEIGHT: 11.5KG

Control Display

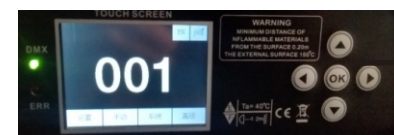

Control KEY

Display: data show that the product information
Menu selection: touch screen& control key both use control menu selection

SR-230Mini DMX Channel Control	
CH1 Pan	0° ————— 255° 0° ————— 540°
CH2 Tilt	0° ————— 255° 0° ————— 250°
CH3 Pan Fine	0° ————— 255° 0° ————— 3.6°
CH4 Tilt Fine	0° ————— 255° 0° ————— 3°
CH5 X/Y Speed	0 ————— 255 X/Y Speed Fast to slow
Ch6 6 color	0 ————— 255
Ch7 Strobe	0 ————— 240 0 ————— 241-255
Ch8 Dimmer	0 ————— 240 0 ————— 241-255
Ch9 Color	0-7 8-15 16-23 24-31 32-39 40-47 48-55 56-63 64-71 72-79 80-87 88-95 96-103 104-111 112-127 128-191 192-255
Ch10 Color Adjust	0 ————— 255
Ch11 GOBO	0 ————— 128-255 0 ————— 128-255
Ch12 GOBO Strobe	0 ————— 255
Ch13 Focus	0 ————— 255
Ch14 Prism1 rotate	0 — 31 128 — 255 0 — 31 128 — 255
Ch15 Prism2 rotate	0 — 31 128 — 255 0 — 31 128 — 255
Ch16 Reset	100-105 200-205 255 Turn off the lamp Turn on the lamp (off the lamp after 1 minute) Later 2s System Reset

400W LED
Follow spot light
400W LED 追光灯

LAMP

技术参数:

工作电压: AC100-240V 50Hz/60Hz
光 源: 400W LED
功 率: 430W
光斑角度: 3° 至 15° 可调
投射距离: 40-50 米
轻便, 亮度度(超越传统 1200W 追光灯亮度)
●5 种颜色+白光
●控制方式: 电子推送. 按钮/ DMX512 控制 (SHADOW-400M)
手动控制 (SHADOW-400)
●轴流风扇致冷, 内部优化风路设计, 散热充分良好;
●符合各种安全保护, Ip20 保护等级;
●适用于舞台、婚庆、多功能演艺厅及迪斯科等场合。
灯具尺寸: 长 525×宽 245×高 225 (mm)
包装尺寸: 长 645×宽 290×高 275 (mm)
净 重: 8.5 公斤
毛 重: 9.5 公斤

TECHNICAL PARAMETER:

Voltage: AC100-240V, 50Hz/60Hz
Light source: 400W LED
Power: 430 w
Beam Angle: adjustable from 3°to 15°
Cast distance: 40-50 m
Lightweight, high brightness(Beyond the brightness of traditional 1200W pursuit lights)
●5 colors + white, rainbow Effect
●Control method:
electronic push button/DMX512 control (SHADOW-400M)
Manual Control (SHADOW-400)
●Convection cooling-fan, optimize internal air duct way, heat elimination rapidly
●According to various kinds of safety standards, IP protect grade.
●Suitable for stage, wedding, multi-function performance hall and disco etc.
Fixture size: 525x245x225(mm)
Carton size: 645x290x275(mm)
Net weight: 8.5kg
Gross weight: 9.5kg

SHADOW-400



SHADOW-400M



B-400



技术参数:


型号: B-500BSW
 输入电压: AC110V-240V/50-60Hz
 光源规格: 400W 白光 LED 模组
 色温: 8000K 显色指数: 75
 光源寿命: 50000 小时
 照度: 4 米 80, 000 LUX 额定功率: 500W
 通道模式: 22 和 26 个通道
 调光系统: 0-100% 线性调节
 聚焦系统: 从 4 米到 50 米的线性调整
 雾化系统: 1 独立雾化效果, 光斑柔和自然
 缩放角度: 4-35 度
 高速频闪: 0-30 次/秒, 可调速频闪效果-频闪宏功能
 颜色: 12 种颜色+白光 色彩半色功能
 颜色系统: 独立的 CMY+CTO 混色系统。
 固定图案: 12 个固定图案+白光
 旋转图案: 7 个玻璃图案, 每个玻璃图案可独立正反转
 棱镜系统: 标配 8 排棱镜和 8 棱镜, 每个棱镜可独立正反反转, 可叠加功能
 宏功能: 控台复位功能, 自走模式, 主从模式
 显示方式: 液晶显示, 按键+触摸双操作模式
 控制信号: 国际标准 DMX512 , 带 RDM 功能, 可在线软件升级, 拔地址码
 冷却方式: 采用轴流风扇加强冷却
 安全装置: 带电子温控过热保护, 过热系统故障时电子温控自动断电保护
 水平/垂直: 防水灯的灯具可做 540° 水平或 270° 垂直扫描, 速度快而平稳。
 灯具设置智能化光电复位修正系统, 偶然发生误动, 也能自动回复原来的位置。此外, 更具有水平垂直锁定钮, 维护和搬运时更方便。
 散热系统:
 运用 CFD 软件对灯具的热流量分析计算, 设计低噪音的散热系统
 风扇驱动性能卓越, 噪音极低。
 防水等级: IP65
 净重: 27Kg
 毛重: 33.28KG
 外形尺寸: 424*367*725mm
 包装尺寸: 601*530*735mm 重量: 93kg
 双装航空箱尺寸: 92*47*90cm
 外观: 灯具采用高强工程尼龙塑料, 抗 UV 处理, 耐高温, 抗老化+耐高温压铸铝外壳, 体积轻巧, 采用风向引流与温度智能监控技术, 散热快!

TECHNICAL PARAMETER:

Voltage: Wide voltage 110V-240V 50-60Hz
 Light source: Original OSRAM Long life 3000 hours
 Power: 450W/550W
 Color wheel: 13+1+colorful rainbow effect+ frost function
 Gobo wheel: 13 fixed gobos+1 white light
 Focusing: Electronic linear high-definition dynamic focusing, using a high-density glass optical lens.
 Linear dimming curve: 0% -100% linear dimming
 Beam angle: 1.8 °
 Channels: 16/20 international standard DMX512 channels.
 XY motor: Three electric drive, powerful, faster, more stable, and quieter
 Control mode: DMX 512, self-propelled, master-slave self-propelled
 Prism: 8 prisms stacked and rotatable, macro function
 The fan drive has excellent performance and extremely low noise.
 Control mode: DMX 512, self-propelled, master-slave self-propelled
 Display screen: LCD display screen adapts to different installation positions
 Pan/Tilt(P/T): Waterproof lights can perform 540 ° pan or 270 ° tilt scanning, with fast and stable speed.
 Intelligent photoelectric reset and correction system is set up for lighting fixtures, which can automatically recover in case of accidental misoperation
 The original position. In addition, it has a horizontal and vertical locking button, making maintenance and handling more convenient.
 Heat dissipation system:
 Use CFD software to analyze and calculate the heat flow rate of lamps, and design a low noise heat dissipation system
 The fan drive has excellent performance and extremely low noise.
 Waterproof grade: IP65
 Net weight: 27KG
 Gross weight: 33.28KG
 Fixture dimensions: 424 * 367 * 725mm
 Packing dimensions: 601 * 530 * 735mm
 2 in one flightcase size: 92 * 47 * 90cm Weight: 93kg
 Appearance: The fixture is made of high-strength engineering nylon plastic, anti UV treatment, high temperature resistant, anti-aging+high temperature resistant die-casting aluminum shell, lightweight, and adopts wind direction drainage and temperature intelligent monitoring technology, so it can dissipate heat quickly!
 Features: No signs of weakness, compact appearance, huge energy, and thick light column
 The waterproof beam light meets high industry standards in terms of optical, structural, and appearance performance. It adopts advanced technology and high brightness light sources, optical technology, and rigorous industrial design to ensure the perfect presentation of lighting design.

Prism effect


8 Prisms

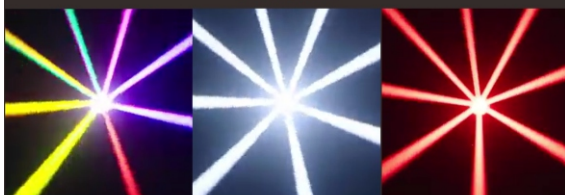

16 Prisms



8 Prisms+16 Prisms

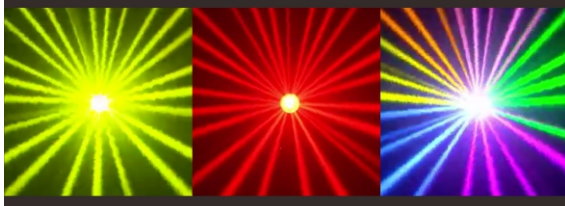

effect drawing



B-400BSW






TECHNICAL PARAMETER:

380W beam 3 in 1 Gobo beam
 light voltage: 100-240V, 50/60Hz
 Bulb model: Original Osram 371W Bulb power: 550W
 Color wheel: A color wheel , 13 color + 1 white light
 Gobo wheel: Two gobo wheels,
 fix gobo wheel with 14 gobos and white light,
 rotating gobos with 9 gobos, can customize customer logos,
 and gobos can be linearly and infinitely enlarged or reduced
 Rotating gobos diameter: 15.8 mm
 Effective inner diameter: 12mm
 Effect wheel: can rotate a circular octaprism,
 with 0-100% mechanical dimming,
 supporting mechanical strobe and adjustable strobe effects,
 and supporting strobe macro function.
 Lens group optical system, electric focusing, beam angle 2.8-38 °.
 Adopting a photoelectric reset system, it can automatically retrieve
 and reset in case of accidental misoperation.
 Channel mode: 17 channel mode.
 The rotation angle is 540 ° pan, with a resolution of 8Bit/16Bit,
 and 270 ° tilt, with a resolution of 8Bit/16Bit.
 Overheat protection.
 Waterproof grade: IP56 Electronic rectifier.
 Net weight: 27Kg,
 Gross weight: 33.28KG
 Fixture dimensions: 424 * 367 * 725mm
 Packing dimensions: 601 * 530 * 735mm
 2 in 1 flightcase: 92 * 47 * 90cm Weight: 93kg
 Appearance: The light is made of high-strength engineering nylon plastic,
 anti UV treatment, high temperature resistant, anti-aging+high temperature
 resistant die-casting aluminum shell, lightweight, and adopts wind direction
 drainage and temperature intelligent monitoring technology,
 so it can dissipate heat quickly!
 Features: No signs of weakness, compact appearance,
 huge energy, and thick light column.

技术参数:

380W 光束三合一图案灯 电压: 100-240V, 50/60Hz
 灯泡型号: 原装欧司朗 371W 灯泡 功率: 550W
 颜色盘: 一个颜色盘, 有 13 个色片+1 个白光
 图案盘: 两个图案盘, 固定图案盘 14 个图案+白光,
 旋转图案盘 9 个图案片, 可订制客户 LOGO,
 图案可以线性无极放大缩小
 旋转图案片直径: 15.8 mm 有效内径: 12mm
 效果轮: 可旋转一个圆形八棱镜, 0-100%机械调光,
 支持机械频闪和可调速频闪效果, 支持频闪宏功能。
 镜头组光学系统, 电动对焦, 光束角 2.8~38°。
 采用光电复位系统, 当偶然发生误动后, 可自动检索复位。
 通道模式: 17 通道模式。
 旋转角度水平 540°, 解析度 8Bit/16Bit,
 垂直 270°, 解析度 8Bit/16Bit。
 过热保护。IP 防护等级: IP56 电子整流器。
 净重: 27Kg
 外形尺寸: 424*367*725mm
 毛重: 33.28KG
 包装尺寸: 601*530*735mm
 双装航空箱尺寸: 92*47*90cm
 重量: 93kg
 外观: 灯具采用高强工程尼龙塑料, 抗 UV 处理。
 耐高温, 抗老化+耐高温压铸铝外壳, 体积轻巧,
 采用风向引流与温度智能监控技术, 散热快!
 特点: 毫不示弱, 外形小巧, 能量巨大, 粗大光柱

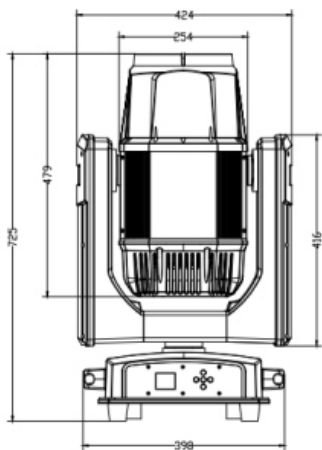

技术参数:

输入电压: AC110V-240V/50-60HZ
光源规格: 400W 白光 LED 模组
色温: 8000k 显色指数: 75
光源寿命: 50000 小时
照度: 4 米 80,000 LUX 额定功率: 500W
通道模式: 22 和 26 个通道
调光系统: 0-100% 线性调节
聚焦系统: 从 4 米到 50 米的线性调整
雾化系统: 1 独立雾化效果, 光斑柔和自然
缩放角度: 4-35 度
高速频闪: 0-30 次/秒, 可调频闪效果-频闪宏功能
颜色: 12 种颜色+白光 色彩半色功能
颜色系统: 独立的 CMY+CTO 混色系统。
固定图案: 12 个固定图案+白光
旋转图案: 7 个玻璃图案, 每个玻璃图案可独立正反转
棱镜系统: 标配 8 排校镜和 8 棱镜,
每个棱镜可独立正反转, 可叠加功能
宏功能: 控台复位功能, 自走模式, 主从模式
显示方式: 液晶显示, 按键+触摸双操作模式
控制信号: 国际标准 DMX512。带 RDM 功能,
可在线软件升级, 按地址码
冷却方式: 采用轴流风扇加强冷却
安全装置: 带电子温控过热保护, 过热系统故障时电子温控自动断电保护
水平/垂直: 防水灯的灯具可做 540° 水平
或 270° 垂直扫描, 速度快而平稳,
灯具设置智能化光电复位修正系统,
偶然发生误动, 也能自动回复原来的位置。
此外, 更具有水平垂直锁定按钮, 维护和搬运时更方便。
散热系统:
运用 CFD 软件对灯具的热流量分析计算, 设计低噪音的散热系统
风扇驱动性能卓越, 噪音极低。
防水等级: IP65
净重: 27Kg 外形尺寸: 424*367*725mm
毛重: 33.28KG 包装尺寸: 601*530*735mm

Waterproof Moving Head Lights



防水摇头灯

LAMP

TECHNICAL PARAMETER:

Voltage: AC110V-240V/50-60HZ
Light source : 400W white LED module
Color temperature: 8000K Color rendering index: 75
Light source lifespan: 50000 hours
Illumination: 4 meters 80000 LUX
Power: 500W
Channel mode: 22 and 26 channels
Dimming : 0-100% linear adjustment
Focus: linear adjustment from 4 meters to 50 meters
Frost: 1 independent frost effect, soft and natural light spot
Zoom angle: 4-35 degrees
High speed strobe: 0-30 times/second, adjustable strobe effect - strobe macro function
Color: 12 colors+white light color half color function
Color system: Independent CMY+CTO color mixing system.
Fix gobo wheel: 12 fix gobos+white light
Rotating gobo wheel: 7 glass gobos, each with independent forward and reverse rotation
Prism system: standard with a single 8-row calibration mirror and 8-prism, each prism can be independently reversed and stacked with functions
Macro function: console reset function, self running mode, master-slave mode
Display mode: LCD display, button+touch dual operation mode
Control signal: International standard DMX512. With RDM function, online software upgrade is possible, and address code can be removed
Cooling method: use axial fan for enhanced cooling
Safety devices: Equipped with electronic temperature control overheat protection, electronic temperature control automatically power-off protection in case of overheat system failure
Pan/Tilt: Waterproof lights can perform 540° pan or 270° tilt scanning, with fast and stable speed,
Intelligent photoelectric reset and correction system is set up for lighting fixtures, which can automatically recover in case of accidental misoperation
The original position. In addition, it has a horizontal and vertical locking button, making maintenance and handling more convenient.
Heat dissipation system:
Use CFD software to analyze and calculate the heat flow rate of lights, and design a low noise heat dissipation system
The fan drive has excellent performance and extremely low noise.
Waterproof grade: IP65
Net weight: 27KG
Gross weight: 33.28KG
Fixture dimensions: 424×367×725mm
Packing dimensions: 601×530×735mm

FIXTURE DIMENSION

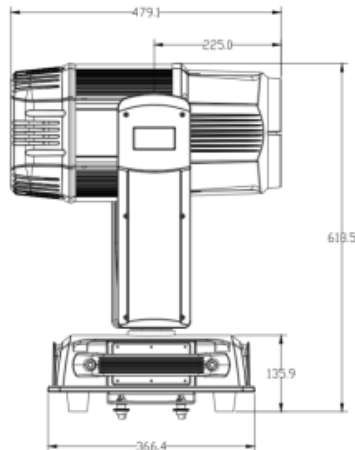
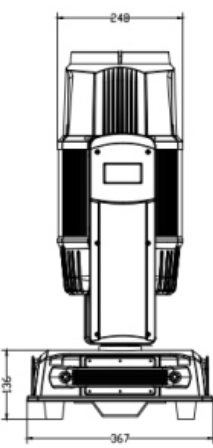


Waterproof Moving Head Lights


防水摇头灯

LAMP


Prism Effect






Rotating gobos



Fix gobos

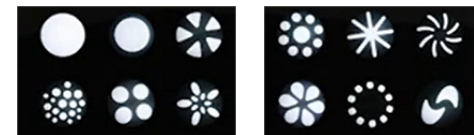

CMY+CTO

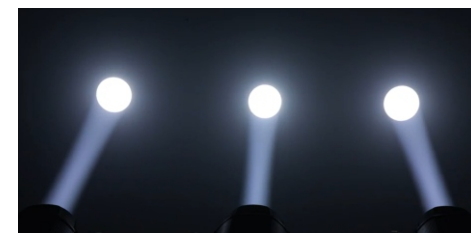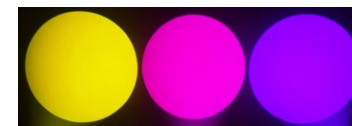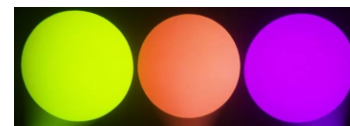

WED-1200



技术参数:

特点:
自动模式 LED 照明系统, 创造无数效果。
光源: 120×10w 4in1 LED
控制器: DMX-512/跟随, 自愿, 声学激活
标准 DMX 通道: 8/12ch
IP 地址设置
3 核 DMX 插孔。
颜色: R、G、B3 分离或混合颜色带来各种效果。
该设备不产生红外线和紫外线, 带来的热量最小, 降低了娱乐场所火灾的风险。
应用范围: 商店、舞台、夜总会、美术馆等。
LED 光源, 更节能耐用。
声学控制模式 (灵敏度可调)。
电源: AC100-240V/50-60Hz
最大功耗: 1200 VA
尺寸 (长 x 宽 x 高) 700x380x540mm
重量: 30kg
工作环境: 室内-20 °C-50 °C

TECHNICAL PARAMETER:

Features:
Automatic Mode LED lighting system, creating numerous effects.
Light source: 120×10w 4in1 LED
Controller: DMX-512/following, voluntary, acoustic-activation
Standard DMX Channel: 8/12ch
IP address setting
3 cores DMX Jack socket.
Color: R,G,B 3 separate or mixed color bring various effects.
The device do not generate infrared ray and ultraviolet ray, bringing the least heat, which reduces the risk of conflagration for entertainment venue.
Application: shops and stores, stages, night clubs, art gallery and so on.
LED light source, saving more energy and durable
.Acoustic control mode(sensibility adjustable).
Power supply: AC100-240V/50-60Hz
Maximum electricity consumption: 1200 VA
Dimension(L x W x H) 700x380x540mm
Weight: 30kg
Working environment: indoor -20°C - 50°C

8CH

HLD-18M DMX Channel Control	
CH1 Dimmer	0-255
CH2 Strobe	0-255
CH3 AUTO	0-255 Open ch1-ch4 Color1 Color2 Color3 Color4 SOUND CHASE
CH4 Speed	0-255 Slow Fast
Ch5 RED	0-255 OPEN Full saturation
Ch6 GREEN	0-255 OPEN Full saturation
Ch7 BLUE	0-255 OPEN Full saturation
Ch8 White	0-255 OPEN Full saturation

12CH

Ch9 RED 2	0-255 OPEN Full saturation
Ch10 GREEN 2	0-255 OPEN Full saturation
Ch11 BLUE 2	0-255 OPEN Full saturation
Ch12 White 2	0-255 OPEN Full saturation



Waterproof Lights
防水投光灯

LAMP

WED-600





技术参数:

输入电压: 110-240V AC, 50/60Hz
光源: 60PCS x10W(4 合 1 LED)
额定功率: 600W
光源寿命: 50000 小时;
颜色: RGBW, 可分别独立调节, 可频闪, 可调亮度,
光束发散角度: 25° (45° / 60° 可选)
通道: 4/6/9 通道
控制模式: 声控、程序自走、主从、DMX512 控制
LED 大彩屏显示操作面板
环境温度: -30°C ~40°C
Y 轴: 人工可调节 45~145 度
防护等级: IP65
净重: 16KG
尺寸: 570*230*270mm
特点: 与传统灯具比, 具有耗电量小, 光效高, 色彩变幻丰富, 光源寿命长, 安全性能高, 宽电压范围均可正常工作, 适应范围广。

TECHNICAL PARAMETER:

Voltage: AC100-240V, 50/60Hz
Power: 650W
Light Source: 60X10W RGBW 4in1 LED
IP Rating: IP65
Lifespan: around 100,000 hours
Housing: Die-casting aluminum, powder-coated finish
Channel: DMX 512, 4/6/9CH
Control Mode: DMX, Auto, Master/Slave mode
Dimmer: 0-100%
Strobe: 0-20Hz
Beam angle: 25°
N.W: 16KG

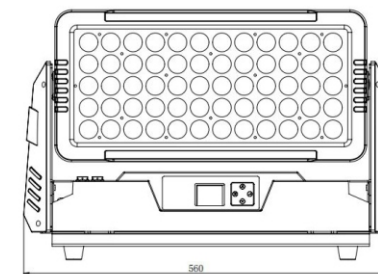

WED-960



技术参数:

电压: AC100~240V 50/60HZ
功率: 380W
灯珠: 960 颗 RGB+W, 12+12 段
控制方式: DMX512、自走、主从、声控、带 RDM 功能。
通道: CH4、CH16、CH48
调光: 32bit 0~100%线性调光
特点: 爆闪+染色+效果
工作温度: -30 度~50 度
频闪频率: 1~30Hz
外观: 金属、黑色
连接方式: DMX512 输入输出 / 电源输入输出。
IP 等级: IP 67
重量: 8.9Kg

TECHNICAL PARAMETER:

Voltage: AC100~240V 50/60HZ
Power: 380W
Lamp beads: 960 RGB+W, 12+12 segments
Control mode: DMX512, self-propelled, master-slave, voice control, with RDM function.
Channels: CH4, CH16, CH48
Dimming: 32bit 0-100% linear dimming
Features: Flash+Wash+Effect
Working temperature: -30 °C~50 °C
Strobe frequency: 1-30Hz
Appearance: Metal, black
Connection method: DMX512 input/output /power input/output.
IP grade: IP 67
Net weight: 8.9kg

YLD-740



技术参数:

电压: AC100~240V 50/60HZ
功率: 350W
灯珠: 7 颗 40W 四合一 LED 灯珠
控制方式: DMX512 、自走、主从、声控、带 RDM 功能。
通道: CH21 , CH49 。
调光: 32bit0~100% 线性调光
特点: 摇头+染色+爆闪+旋转
工作温度: -30 度~50 度
频闪频率: 1~30HZ
外观: 金属、黑色
连接方式: DMX512 输入输出 / 电源输入输出。
IP 等级: IP20
灯体尺寸: 30*23*38 (cm)
包装尺寸: 44*38*45 (cm)
净重: 5.9kg
毛重: 7.5kg




LAMP

Effect Lights
效果灯


TECHNICAL PARAMETER:

Voltage: AC100 ~ 240V 50 / 60Hz
Power: 350W
Lamp beads: 7 pcs 40W four in one LED lamp beads
Control mode: DMX512, self-propelled, master-slave, voice control, with RDM function。
Channel: CH21, CH49.
Dimming: 32bit 0 ~ 100% linear dimming
Features: shake head + dye + explosion flash + rotation
Working temperature: - 30 ~ 50 °C
Stroboscopic frequency: 1 ~ 30Hz
Appearance: metal, black
Connection mode: DMX512 I / O / power I / O.
IP rating: IP20
Fixture size: 30*23*38(cm)
Packing size: 44*38*45(cm)
Net weight: 5.9kg
Gross weight: 7.5kg

Effect Drawing

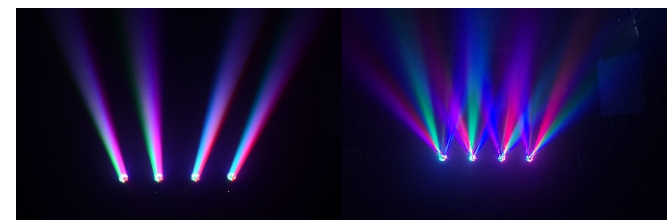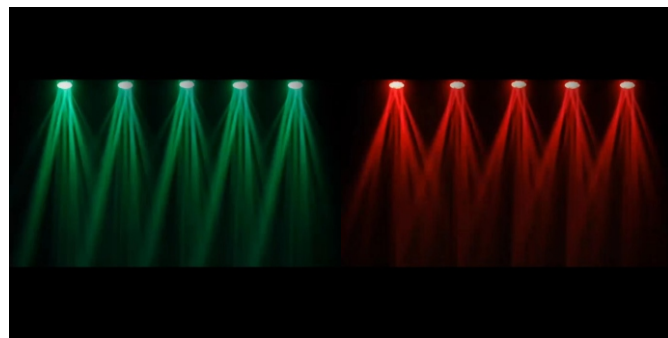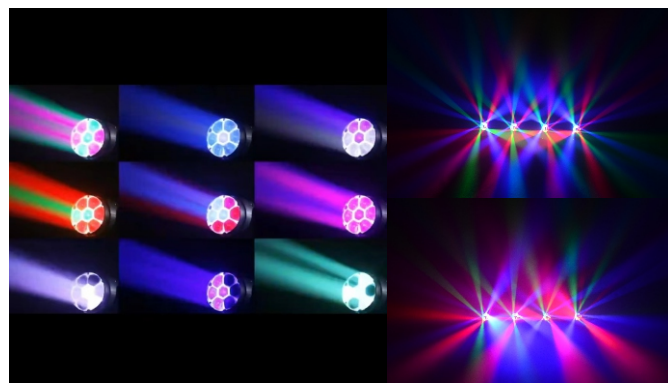

YSH-441





技术参数:

电压: AC100~240V 50/60HZ
功率: 90W
灯珠: 441 颗 5050 RGB 灯珠
控制方式: DMX512 、自走、主从、声控、带 RDM 功能。
通道: CH1 、CH18 、CH154 、CH162
调光: 32bit0~100% 线性调光
特点: XY 摇头+爆闪+染色
工作温度: -30 度~50 度
频闪频率: 1~30HZ
外观: 金属、黑色
连接方式: DMX512 输入输出 / 电源输入输出。
IP 等级: IP20
外包装: 64*64*37cm
内包装: 31*31*34cm
净重: 4.1KG
毛重: 17.2KG

TECHNICAL PARAMETER:

Voltage: AC100~240V 50/60HZ
Power: 90W
Lamp beads: 441 5050 RGB lamp beads
Control mode: DMX512, self-propelled, master-slave, with RDM function.
Channels: CH1, CH18, CH154, CH162
Dimming: 32bit 0-100% linear dimming
Features: XY shake head+burst flash+dyeing
Working temperature: -30°C ~ 50°C
Strobe frequency: 1-30Hz
Appearance: Metal, black
Connection method: DMX512 input/output/power input/output.
IP level: IP20
External packing: 64*64*37cm
Inside packing: 31*31*34cm
Net weight: 4.1KG
Gross weight: 17.2KG



DS-36




技术参数:

室内 36pcs LED 每个像素控制 LED 光束
LED: 36x3W RGB 3in1 LED
电源: 120w
镜头角度: 3-5°
控制方式: 自动/主从/DMX512,
电源输入输出
DMX 通道: 3/4/6/7/8/12/13/24/25/60/61/120/121 CH
产品尺寸: 100*22*19cm
(主纸箱: 6 个灯装 1 个纸箱)
净重: 2.5kg
IP 等级: IP20

TECHNICAL PARAMETER:

Indoor 36pcs LED each Pixel control LED Bar
LEDs: 36pcs 3W RGB 3in1 LED
Power Supply: 120w
Lens Angle: 3-5°
Control mode: Auto/Master-slave/DMX512
Power con in & out
DMX channels: 3/4/6/7/8/12/13/24/25/60/61/120/121 CH
Product Size: 100*22*19cm
(Master carton: 6pcs-in-1)
N. W: 2.5kg
IP Rate: IP20

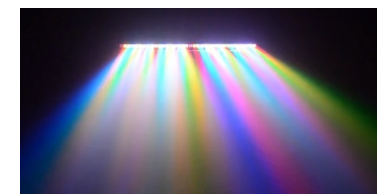

SH-200M

Effect Lights
效果灯

LAMP

技术参数:

电压: AC100~240V 50/60HZ
功率: 240W
灯珠: 864 颗 5050 三色 LED 灯珠 96 颗 7575 白色灯珠
控制方式: DMX512、自走、主从、声控、带 RDM 功能。
通道: CH04、CH11、CH32、CH39
调光: 32bit 0~100%线性调光
特点: 8 段跑马+染色+爆闪
工作温度: -30 度~50 度
频闪频率: 1~30HZ
外观: 金属、黑色
连接方式: DMX512 输入输出 / 电源输入输出。
IP 等级: IP20
重量: 7kg
尺寸: 450X220X230mm

TECHNICAL PARAMETER:

Voltage: AC100~240v 50/60hz
Power: 240W
Lamp beads: 864 pieces 5050 RGB LED lamp beads, 96 7575 White LED beads
Control mode: DMX512, self-propelled, master-slave, voice control, with RDM function.
Channel: CH04, CH11, CH32, CH39
Dimming: 32bit 0~100% linear dimming
Features: 8-segment Trotting Horse + Washing + Flash
Working temperature: -30 °C ~50 °C
Stroboscopic frequency: 1~30hz
Appearance: metal, black
Connection mode: DMX512 input / output / power input / output.
IP grade: IP20
Net weight: 7KG
Fixtrue Dimension: 45*22*23cm

技术参数:

颜色:白色, 红色, 蓝色, 绿色
电压: AC110~240V 50/60Hz
灯泡:960 颗 0.3W-0.4W 5050 RGB LEDs
色温:6000-8000K
通道: 3CH, 9CH, 24CH
DMX-512:3CH, 9CH, 24CH
通道调节速度或者亮度
0-100%亮度控制
尺寸: 560X250X350mm
重量: 7kg

TECHNICAL PARAMETER:

Color: white, red, blue, green
Voltage: AC110-240V 50/60Hz
Bulbs: 960pcs 0.3W-0.4W 5050 RGB LEDs
Color temperature: 6000-8000K
Channels: 3CH, 9CH, 24CH
The DMX512:3/9/24CH channel adjusts the speed or brightness
0-100% brightness control
Size: 560X250X350mm
Weight: 7kg

400W LED moving head front light
摇头面光灯

LAMP

SH-200M

技术参数:

额定电压: AC100V-240V 50/60HZ
总功率: 450W
光源: 400W COB LED 灯珠 5600K 色温
寿命: 50000 小时
颜色: 6000K 正白 LED, 带 CTO 色温校正
显示指数: 大于 95
调光: 0-100%线性调光, 带 CTO 色温校正
频闪: 频闪 1-25Hz
IP 防护等级: 室内 IP20
出光角度: 电动调焦, 调焦角度 5-50 度
控制信号: 国际标准 DMX512 信号
X 轴运行角度: 540° (16bit) 线性校正
Y 轴运行角度: 270° (16bit) 线性校正
通道数量: 10CH
控制方式: 主从, 自走, 标准 DMX512, 声控
散热方式: 风冷+自然散热
散热控制: 主板智能温控系统, 超温过热自动保护
材料: 铝
机箱颜色: 黑色
工作环境: -20° C~40° C
产品毛重: 10.5Kg
高显指: CRI >95
带 RDX 功能, 智能风扇, 温度检测
超高亮度, 节能高效, 可代替传统 1000W—3000WPAR 灯

TECHNICAL PARAMETER:

Rated voltage: AC100V-240V 50/60Hz
Total power: 450W
Light source: 400W COB LED Beads 5600K color temperature
Lifetime: 50000 hours
Color: 6000K white LED with CTO color temperature correction
Display index: >95
Dimming: 0-100% linear dimming with CTO color temperature correction
Strobe: Strobe 1-25Hz
IP Rating: indoor IP20
Light angle: Electric focusing, focusing angle 5-50 degrees
Control signal: International standard DMX512 signal
X-axis operating angle: 540° (16bit) linear correction
Y-axis operating angle: 270° (16bit) linear correction
Number of channels: 10CH
Control mode: master-slave, self-propelled, standard DMX512, voice control
Heat dissipation method: air cooling+natural heat dissipation
Heat dissipation control: Main board intelligent temperature control system, automatic protection for over temperature and overheating
Material: Aluminum
Case color: black
Working environment: -20 °C ~40 °C
Gross weight: 10.5Kg
High display index: CRI>95
Equipped with RDX function, intelligent fan, temperature detection
Ultra high brightness, energy-saving and efficient, can replace traditional 1000W-3000WPAR lights

