

SKYSTAR



广州亮星灯光科技有限公司

SKYSTAR LIGHTING LIMITED

地址：中国 广东 广州市天河区 龙洞迎龙大道260号龙山工业园E-1栋二层
电话：020-87022418
传真：020-87023011
移动电话：13602863513 13609702481
网址：www.lightskystar.com
www.skystarlighting.com
电子邮箱：vinca2004@126.com, 1843755954@qq.com, 623872311@qq.com,
1725113820@qq.com, 1284963471@qq.com

Add: 2F., Building E-1, Longshan industry Park, No.260 Yinglong RD., Longdong,
Tianhe District, Guangzhou China.
Web site: www.lightskystar.com
www.skystarlighting.com
E-mail: vinca2004@126.com, 1843755954@qq.com, 623872311@qq.com,
1725113820@qq.com, 1284963471@qq.com
Tel: +8620-87022418
Fax: +8620-87023011
cellphone: +86 13609702481 (NIKI)
Whatsapp: +86 13602863513 (Jack)
+86 18902251183 (Lily)




广州亮星灯光科技有限公司

SKYSTAR LIGHTING LIMITED

THUNDER-800BSWP



Color Effect


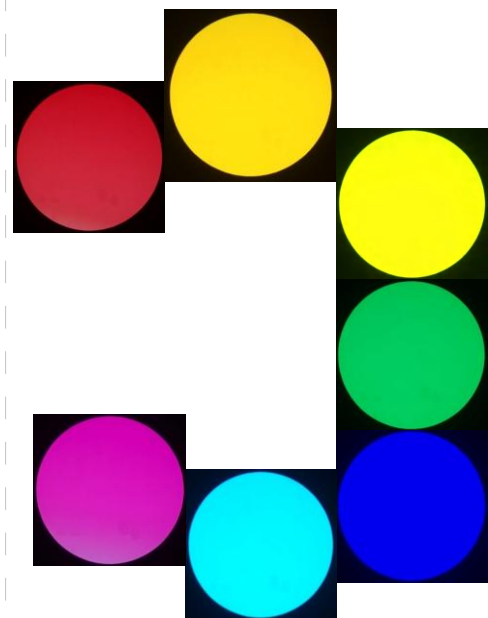


800W LED Moving Head Lights
BSWP 4 in 1
光束/图案/染色/切割 4合1 LED 摇头灯

LED



技术参数:

型号: THUNDER-800BSWP
电压: AC100-240V 50/60Hz
光源: 800W LED 模组
功耗: 900W
光束角度: 4° --40°
颜色轮: 7 种颜色+白光, 半色效果,
可做双向变速彩虹效果。
混色系统: CTO+CMY 0-100 可调
旋转图案轮: 7 个可变换图案片+白光,
可做双向变速效果。
固定图案轮: 7 个图案片+白光, 可做双向变速效果。
效果盘: 一个滚动图案盘
棱镜: 5 面可旋转棱镜和线形菱镜, 2 个棱镜盘,
可叠加, 可正反方向旋转, 并具有棱镜定位功能。
切割系统: 8 片电动调节切割片。
光圈: 10-100%可调
调焦: 线性平滑放大调焦
雾化: 0~100%可调
调光: 0~100%线性可调
频闪: 每秒 0.5~30 闪, 速度可调。
水平/垂直: 平滑、自动平移和倾斜。
位置校正, 速度可调
旋转角度: 水平-540°, 垂直-270° (16 位)
通道: 36CH
净重: 34.5KG
毛重: 39KG
灯体尺寸: L432×W320×H750(mm)
包装尺寸: L500×W400×H810(mm)

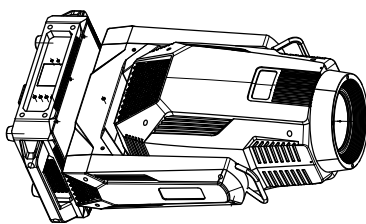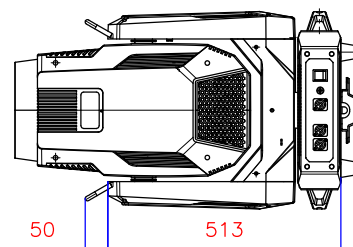

TECHNICAL PARAMETER:

VOLTAGE: AC100- 240V 50/60Hz
LIGHT SOURCE: 800W LED ENGINE
POWER CONSUMPTION: 900W
BEAM ANGLE: 4°--40°
1 COLOR WHEEL: 7 colors+open, half color effect,
bi-directional rainbow effect at variable speed
CMY+CTO COLOR MIXING SYSTEM: 0-100%
1 ROTATING GOBO WHEEL: 7 rotating gobos+open,
bi-directionally rotating at variable speed
1 FIX GOBO WHEEL: 7 fix gobos+open, bi-directionally
rotating at variable speed
EFFECT: A rolling gobo
2 PRISM WHEEL: 5-facet prism and 6-facet linear prism,
bi-directionally rotating, at variable speed
CUTTING SYSTEM: rically adjustable cutting discs
APERTURE: 10~100% adjustable
FOCUS: Linear smooth zoom and focus
WASH: 0~100% adjustable
DIMMER: 0~100% linearly adjustable
STROBE: 0.5~30 flash per second, speed adjustable
PAN AND TILT: Smooth, automatic Pan & Tilt
position correction, speed adjustable
RANGE: Pan-540°, Tilt-270°(16-bit)
CHANNELS: 36CH
NET WEIGHT: 34.5KG
GROSS WEIGHT: 39KG
FIXTURE DIMENSION: L432×W320×H750(mm)
PACKING DIMENSION: L500×W400×H810(mm)

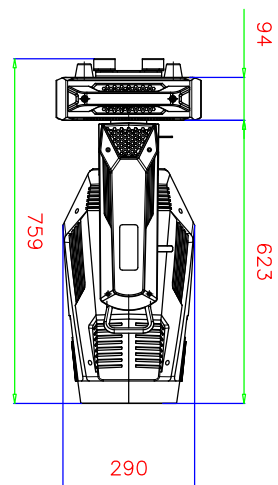


LED

800W LED Moving Head Lights
BSWP 4 in 1
光束/图案/染色/切割 4合1 LED 摇头灯


Rotating gobos




Fix gobos



Prism Effect



Cutting



Effect drawing



THUNDER-250



技术参数:

电压: AC100- 240V 50/60Hz
光源: 250W 白光模组 LED
功率: 300W
使用寿命: 30,000~500,000 小时
光斑角度: 3° -38°
颜色轮: 9 个颜色片+白光,半色效果,可做双向,可做双向变速彩虹效果。
旋转图案轮: 7 个可更换图案片+白光,可做双向变速效果。
固定图案轮: 9 个可更换图案片+白光,可做双向变速效果。
棱镜: 四棱镜, 双向旋转, 速度可调
调焦: 线性调焦
雾化: 0%-100%可调
调光: 0-100%线性调光
频闪: 0.5-20 次/秒, 速度可调
旋转角度: 水平 540°, 垂直 270°
(自动回位纠错功能, 具有 16bit 精度调节)
切光: 具有颜色+图案+棱镜+水平/垂直切光功能。
控制: 国际标准 DMX512 信号, 3 芯接口
通道: 16CH/20CH
净重: 12.5 公斤
毛重: 14.5 公斤
灯体尺寸: 长 295×宽 205×高 555(mm)
包装尺寸: 长 380×宽 320×高 600(mm)



TECHNICAL PARAMETER:

VOLTAGE: AC100- 240V 50/60Hz
LIGHT SOURCE: 250W ENGINE LED
POWER CONSUMPTION: 300W
RATED LIFE: 30,000~500,000hours
BEAM ANGLE(ZOOM): 3° -38°
1 COLOR WHEEL: 9 colors+open, half color effect, bi-directional rainbow effect at variable speed
1 ROTATING GOBO WHEEL: 7 rotating gobos+open, bi-directionally rotating at variable speed
1 FIX GOBO WHEEL: 9 fix gobos+open, bi-directionally rotating at variable speed
1 PRISM WHEEL: 4-facet prism, bi-directionally rotating, at variable speed
FOCUS: Linearly adjustable
DIMMER: 0~100% linearly adjustable
WASH: 0~100% adjustable
STROBE: 0.5~20 flash per second, speed adjustable
PAN AND TILT: Smooth, automatic Pan & Tilt position correction, speed adjustable
RANGE: Pan-540° ,Tilt-270°
VECTOR MODE: Color+GOBO+Prism+XY Vector
CONTROL PROTOCOL: DMX 512, 3 pin interface
CHANNELS: 16/20CH
FIXTURE DIMENSION: L295×W205×H555(mm)
PACKING DIMENSION: L380×W320×H600(mm)
NET WEIGHT: 12.5KG
GROSS WEIGHT: 14.5KG



Rotating gobos

Prism Effect

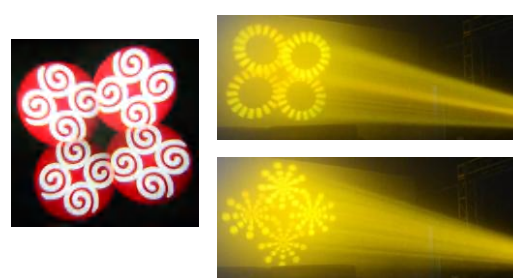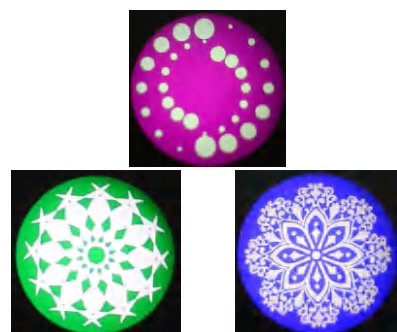

THUNDER-200BSW





技术参数:

输入电压: AC100V~240V/频率: 50~60Hz
灯泡: 200W LED 模组
色温: 7000K
灯泡寿命: 50000 小时
颜色盘: 1 个固定颜色盘, 8 个颜色+白色, 彩虹效果速度可调, 半步颜色效果
图案盘: 1 个旋转图案盘, 8 个可更换图案盘+白光, 图案往返流水由慢到快
1 个固定图案盘, 7 个图案+白光, 可双向变速旋转
棱镜: 1 个 3 棱镜, 棱镜自转及速度可调节功能
光束: 多级光束角度变化效果
LED 效果: 24 颗 5050 灯珠, 圈控可调速。
调焦: 线性调焦
调光: 0-100%线性调节
投光范围: X 向 540 度, Y 向 270 度, 可自动校正定位
扫描速度: X 向 3.0 秒/540 度, Y 向 2.0 秒/250 度
光束角度: 平行光束角 0°-3°
放大角度: 3°-30°
雾化光角度 8°
频闪: 0.5-14 次/秒可调
控制方式: 15 国际标准 DMX512 通道
控制协议: DMX512、RDM
防护等级: IP20
灯体尺寸: 28x19x46(cm)
净重: 9.3kg

Input voltage: AC100V~240V / frequency: 50~60Hz
Bulb: 200 WLED module
Color temperature: 7,000 K
Bulb life: 50,000 hours
Color wheel: 8 colors + white, rainbow effect speed is adjustable, half-step color effect
Gobo wheel :
1 rotating gobo wheel : 8 rotating gobos + white light, pattern back and forth water from slow to fast
1 fixed gobo wheel : 7 fix gobos + white light, can be two-way variable speed rotation
Prism: 13-prism, prism rotation and speed adjustable function
Beam: multistage beam angle change effect
LED effect : 24pcs 5050 LED circle speed change.
Focus: Linear focus
Dimming: 0-100% linearized
Light projection range: X to 540 degrees, Y to 270 degrees, can automatically correct the positioning
Scan speed: X to 3.0 seconds / 540 degrees, Y to 2.0 seconds / 250 degrees
Beam angle: parallel beam angle of 0-3
Zoom-in angle: 3°-30°
Fog light Angle 8°
Strobe: 0.5-14 times / second adjustable
Control mode: international standard DMX512 channel
Control protocol: DMX512, RDM
Protection level: IP20
Dimensions: 28x19x46CM
Net weight: 9.3 kg

DMX-512 linkage

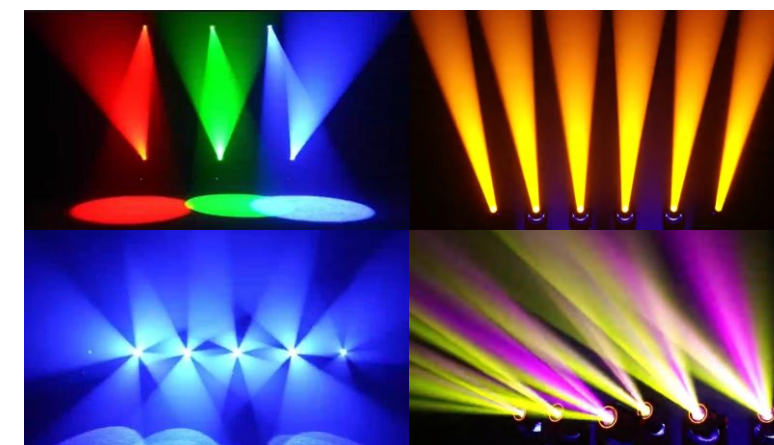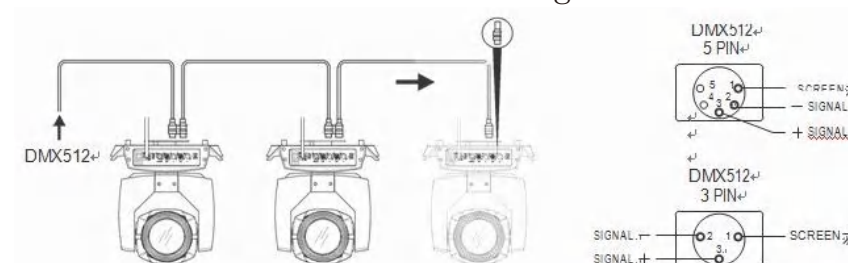

SG-420EVO



SG-380EVO



THUNDER-300BSW



Beam Spot Wash 3 in 1
Moving Head Lights
光束/图案/染色 3合1摇头灯

LAMP


技术参数:

电压: AC90-240V 50/60Hz
光源: 20R 420W /18R 380W / 300W LED 白光模组
功耗: 550W /500W / 420W
光束角度: 2° -40°
颜色轮: 9 种颜色+白光, 半色效果,
可做双向变速彩虹效果。
旋转图案轮: 7 个可变换图案片+白光,
可做双向变速效果。
固定图案轮: 9 个可变换图案片+白光,
可做双向变速效果。
棱镜: 5 面可旋转棱镜, 2 个棱镜盘,
可叠加, 可正反方向旋转, 并具有棱镜定位功能。
调焦: 线性可调
雾化: 0~100%可调
调光: 0~100%线性可调
频闪: 每秒 0.5~20 闪, 速度可调。
水平/垂直: 平滑、自动平移和倾斜。
位置校正, 速度可调
旋转角度: 水平-540°, 垂直-270° (16 位)
通道: 16/24CH
净重: 15.5KG
毛重: 18KG
灯体尺寸: L325×W249×H598 (mm)
包装尺寸: L390×W320×H650 (mm)


TECHNICAL PARAMETER:

VOLTAGE: AC90- 240V 50/60Hz
LIGHT SOURCE: 20R 420W /18R 380W / 300W LED ENGINE
POWER CONSUMPTION: 550W /500W /420W
BEAM ANGLE: 2° -40°
1 COLOR WHEEL: 9 colors+open, half color effect,
bi-directional rainbow effect at variable speed
1 ROTATING GOBO WHEEL: 7 rotating gobos+open,
bi-directionally rotating at variable speed
1 FIX GOBO WHEEL: 9 fix gobos+open, bi-directionally
rotating at variable speed
2 PRISM WHEEL: 5-facet prism, 5-facet linear prism
bi-directionally rotating, at variable speed
FOCUS: Linearly adjustable
WASH: 0~100% adjustable
DIMMER: 0~100% linearly adjustable
STROBE: 0.5~20 flash per second, speed adjustable
PAN AND TILT: Smooth, automatic Pan & Tilt
position correction, speed adjustable
RANGE: Pan-540°, Tilt-270° (16-bit)
CHANNELS: 16/24CH
NET WEIGHT: 15.5KG
GROSS WEIGHT: 18KG
FIXTURE DIMENSION: L325×W249×H598(mm)
PACKING DIMENSION: L390×W320×H650(mm)

Prism Effect



FIXTURE DIMENSION

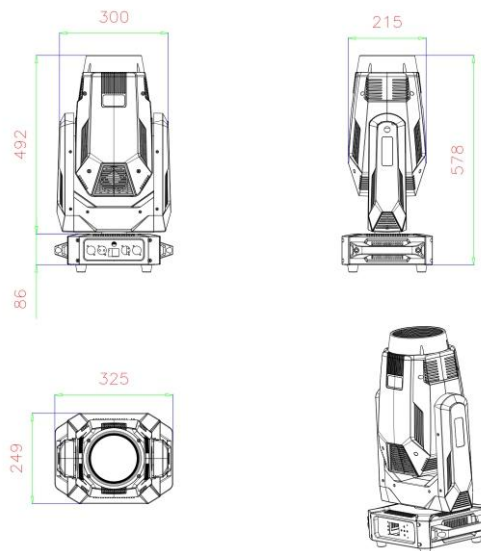

LAMP

420W Beam
Moving Head Lights
420W 光束摇头灯

SR-420H



技术参数:

电 压: 100V-240V 50/60HZ
灯 泡: 421 (牛尾) 舞台灯泡
功 耗: 550W
光学器件: 高效率镜头组, 变焦 0° 至 2°
电子聚焦: 20 米处, 220000LUX
通道模式: 16 国际标准 DMX512 通道
水平扫描: 540° (16bit 精度扫描)
垂直扫描: 280° (16bit 精度扫描)
色 片 盘: 12 个色片+白光,
带双向旋转的彩虹效果
图案盘: 13 个图案片+白圆,
带图案抖动和图案任意定位功能
棱镜盘 2 个可旋转棱镜, 两个棱镜盘可叠加。
可正反方向旋转。
频 闪: 频闪频率最高可以 10 次每秒,
并可选择随机频闪及脉冲频闪
调 光: 0%~100%线性调光
雾 化: 0%~100%线性雾化
效果盘 : 六彩盘
电子整流器: 使产品重量更轻, 亮度更强,
灯泡更稳定, 更环保, 更节能
开关电源: AC100~240V, 50/60HZ
灯体尺寸: 长 380×宽 265×高 605 (mm)
包装尺寸: 长 410×宽 295×高 655 (mm)
净 重: 19 公斤
毛 重: 21 公斤

TECHNICAL PARAMETER:



VOLTAGE: AC100- 240V 50/60Hz
LIGHT SOURCE: USHIO421
POWER CONSUMPTION: 550W
OPTICAL DEVICE: high efficiency lens group, 0°-2° zoom
ELECTRONIC FOCUS: 20 meters, 220000 LUX
CHANNEL MODE: 16 standard DMX512 channel
LEVEL SCANNING: 540 (16 bit precision scan)
VERTICAL SCAN: 280 (16 bit precision scan)
COLOR WHEEL: 12 color and white light
with two-way rotating and rainbow effect
GOBO WHEEL: 13 gobos and white circle
with design jitter and arbitrary positioning function
PRISM: 2 prism, 2 prism wheel with superposition,
positive and negative rotation.
SHUT: shut up to 10 times per second,
random shut and pulse shut can be choosed
DIMMER: 0% ~ 100% linear dimmer
FROST: 0% ~ 100% linear frost
EFFECT: 6 color wheel
Electronic ballast : make the product more light and bright.
Lamp more stable environmental protection and
more energy saving
SWITCHING POWER SUPPLY : AC100 ~ 240 V, 50/60 HZ
FIXTURE DIMENSION: L380×W265×H605(mm)
PACKING DIMENSION: L410×W295×H655(mm)
NET WEIGHT: 19KG
GROSS WEIGHT: 21KG

SR-420H SR-380 SR-251



USH IO 421

Order reference	USH IO 421	
Rated lamp wattage	W	420
Rated lamp voltage	V	70
Rated lamp current (square)	A	6.0
Ignition voltage (cold/hot)	kVs	3.0
Color temperature	K	7600
Electrode gap	mm	1.14
Lamp length (overall) * l	mm	39
Reflector diameter * d	mm	58
Working distance * a	mm	37.4
Average service life	h	2000/ Normor 4000/ Eco
Initial luminous flux	lm	29000
CRI		80

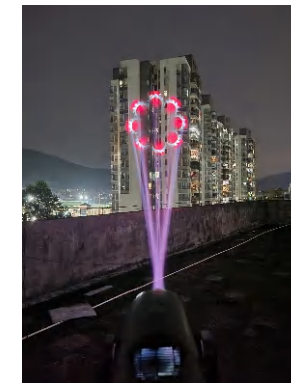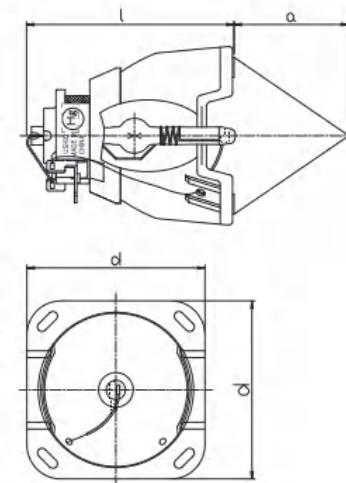

SR-380PRO



SR-380



18R 380W Beam Moving Head Lights
380W 光束摇头灯


LAMP

技术参数:

灯泡: 18R 380W/OSRAM 371w
功耗: 100-240V 50/60HZ 460W
使用寿命: 1500小时
光斑角度: 0° -2°
电子聚焦: 20米处, 180000LUX
颜色轮: 12个颜色片+白光, 半色效果, 可做双向变速彩虹效果。
图案: 旋转图案轮: 6个可更换图案片(其中4个玻璃图案)+白光, 可做双向变速效果。(SR-380PRO)
图案: 固定图案轮: 15个可更换图案片+白光, 可做双向变速效果。
棱镜 四个可旋转棱镜(SR-380PRO), 两个棱镜盘, 可叠加。可正反方向旋转, 并具有棱镜定位功能
调焦: 线性调焦
雾化: 0%-100%可调
效果盘: 六彩盘
调光: 0-100%线性调光
频闪: 0.5-20次/秒, 速度可调
旋转角度: 水平540°, 垂直270°
自动回位纠错功能, 具有16bit精度调节)
切光: 具有颜色+图案+棱镜+水平/垂直切光功能
控制: 国际标准DMX512信号, 3芯接口
通道: 16/18/20CH(SR-380PRO) 16CH(SR-380)
显示: 触摸显示屏, 显示可选倒置
防护等级: IP20, 内置过热和触发高压保护, LED 温度显示
净重 15.5公斤 (SR-380PRO) 14公斤 (SR-380)
毛重: 17.5公斤 (SR-380PRO) 16公斤 (SR-380)
灯体尺寸: 长324×宽238×高527(mm)
包装尺寸: 长385×宽300×高590(mm)

TECHNICAL PARAMETER:


VOLTAGE: AC100- 240V 50/60Hz
LIGHT SOURCE: 18R 380W/OSRAM 371W
POWER CONSUMPTION: 460W
BEAM ANGLE: 0°--2°
ELECTRONIC FOCUS: 20 meters, 180000 LUX
1 COLOR WHEEL: 12 colors+open, half color effect, bi-directional rainbow effect at variable speed
1 ROTATING GOBO WHEEL: 6 rotating gobos+open, bi-directionally rotating at variable speed (SR-380PRO)
1 FIX GOBO WHEEL: 15 fix gobos+open, bi-directionally rotating at variable speed
2 PRISM WHEEL: 4PRISM (SR-380PRO), 2PRISM (SR-380) 8, 16, 24-facet prism, 6-facet linearprism bi-directionally rotating, at variable speed
FOCUS: Linearly adjustable
WASH: 0~100% adjustable
EFFECT: 6 color whee
DIMMER: 0~100% linearly adjustable
STROBE: 0.5~20 flash per second, speed adjustable
PAN AND TILT: Smooth, automatic Pan & Tilt position correction, speed adjustable
RANGE: Pan-540°, Tilt-270° (16-bit)
VECTOR MODE: Color+GOBO+Prism+XY Vector
CONTROL PROTOCOL: DMX 512, 3 pin interface
CHANNELS: 16/18/20CH (SR-380PRO) 16CH (SR-380)
DISPLAY: Touch screen, the words can be upside down
PROTECT GRADE: IP20, overheating & overvoltage protection
NET WEIGHT: 15.5KG (SR-380PRO) 14KG (SR-380)
GROSS WEIGHT: 17.5KG (SR-380PRO) 16KG (SR-380)
FIXTURE DIMENSION: L324×W238×H527(mm)
PACKING DIMENSION: L385×W300×H590 (mm)

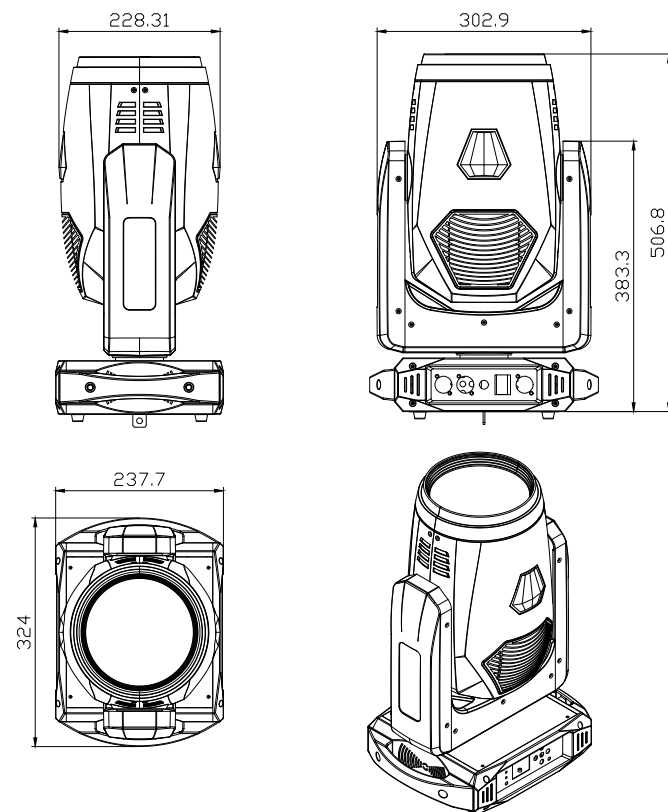

18R 380W Beam Moving Head Lights
380W 光束摇头灯


LAMP

固定图案 (FIX GOBO)

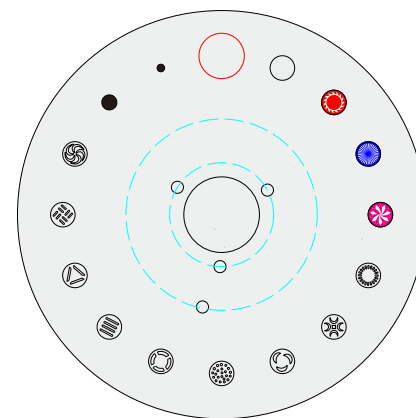

旋转图案 (ROTA GOBO)


图案片尺寸19.9mm
图案尺寸15mm

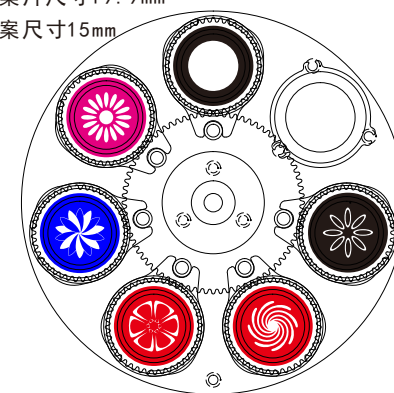

颜色 (COLOR)



SR-380 >> 光效图

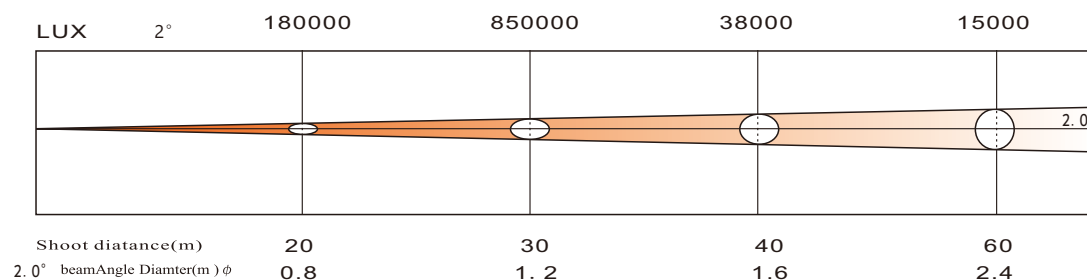


SR-380PRO DMX Channel Control	
CH1 Color	0-7 8-15 16-23 24-31 32-39 40-47 48-55 56-63 64-71 72-79
CH2 Strobe	0 240 241-255
CH3 Dimmer	0 240 241-255
CH4 GOBO	0 128-255
Ch5 PrismA	0 10 11 90 91 170 171 255
Ch6 PrismB	0 10 11 255
Ch7 Rota gobo	0-14 15-84 85-99 100-104 105-119 120-127 128-255
Ch8 Gobo rota	0-14 15-84 85-99 100-104 105-119 120-127 128-255
Ch9 Focus	0 255
Ch10 Pan	0 255
Ch11 Pan Fine	0° 540°
Ch12 Tilt	0 255
Ch13 Tilt Fine	0° 250°
Ch14 Mode	0 255
Ch15 6 color	0 127 128 191 192 255
Ch16 Reset	100-105 200-205 255



SR-251R



SR-251

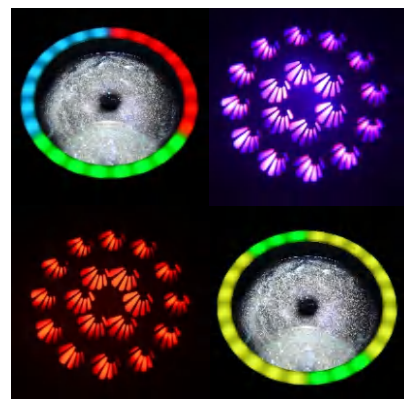

9R 250W Beam
Moving Head Lights
250W 光束摇头灯

LAMP



技术参数:

灯 泡 9R 250W
功 耗: 100V~240V 50/60HZ, 320W
光学器件: 高效率镜头组, 变焦0° 至 2°
电子聚焦: 20米处, 50000LUX
通道模式: 16/18 (SR-251R) 国际标准DMX512通道
水平扫描: 540° (16bit精度扫描)
垂直扫描: 280° (16bit精度扫描)
色 片 盘: 12个色片+白光,
带双向旋转的彩虹效果
图案盘: 13个图案片+白圆,
带图案抖动和图案任意定位功能
棱镜盘2个可旋转棱镜, 两个棱镜盘可叠加。
可正反方向旋转。
频 闪: 频闪频率最高可以10次每秒,
并可选择随机频闪及脉冲频闪
调 光: 0%~100%线性调光
雾 化: 0%~100%线性雾化
LED 效果 : 24 颗5050灯珠, 圈控可调速。
(SR-251R)
效果盘 : 六彩盘
电子整流器: 使产品重量更轻, 亮度更强,
灯泡更稳定, 更环保, 更节能
开关电源: AC100~240V, 50/60HZ
灯体尺寸: 长286×宽218×高465 (mm)
包装尺寸: 长345×宽280×高530 (mm)
净 重: 9.8公斤
毛 重: 11.5公斤

TECHNICAL PARAMETER:

VOLTAGE: AC100- 240V 50/60Hz
LIGHT SOURCE: 9R,250W
POWER CONSUMPTION: 320W
OPTICAL DEVICE: high efficiency lens group,0°-2°zoom
ELECTRONIC FOCUS: 20 meters, 50000 LUX
CHANNEL MODE: 16/18 (SR-251R) standard DMX512 channel
LEVEL SCANNING: 540 (16 bit precision scan)
VERTICAL SCAN: 280 (16 bit precision scan)
COLOR WHEEL: 12color and white light
with two-way rotating and rainbow effect
GOBO WHEEL: 13 gobos and white circle
with design jitter and arbitrary positioning function
PRISM: 2 prism,2 prism wheel with superposition,
positive and negative rotation.
SHUT: shut up to 10 times per second,
random shut and pulse shut can be choosed
DIMMER: 0% ~ 100% linear dimmer
FROST: 0% ~ 100% linear frost
EFFECT: 6 color wheel
LED EFFECT: 24PC 5050LED ,circle speed change
(SR-251R)
Electronic ballast : make the product more light and bright.
Lamp more stable environmental protection and
more energy saving
SWITCHING POWER SUPPLY : AC1G0 ~ 240 V, 50/60 HZ
FIXTURE DIMENSION: L286×W218×H465(mm)
PACKING DIMENSION: L345×W280×H530(mm)
NET WEIGHT: 9.8KG
GROSS WEIGHT: 11.5KG)

SR-251/251R >>光效图

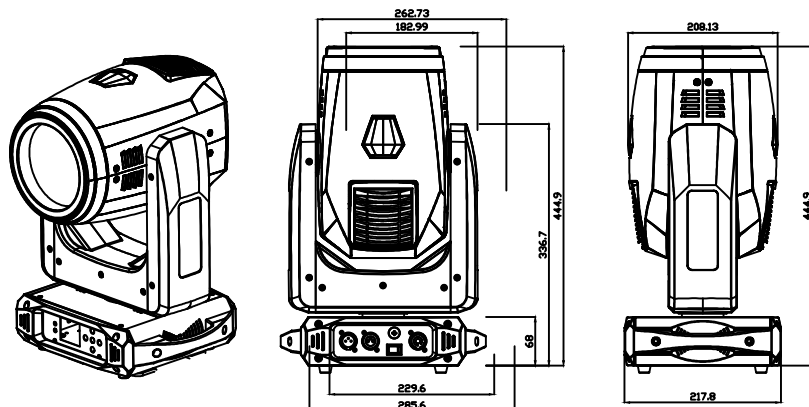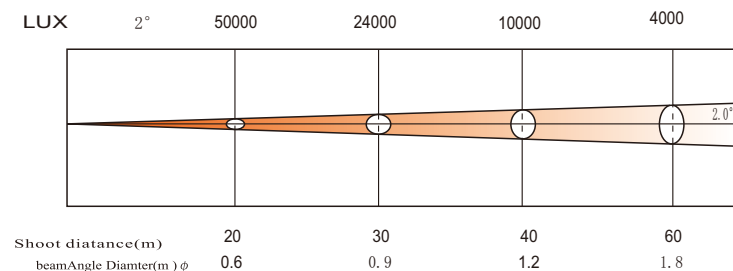

LAMP

7R 230W Beam
Moving Head Lights
230W 光束摇头灯

SR-230Mini



技术参数:

开关电源: AC100~240V, 50/60HZ
灯 泡: 7R 230W
功 率: 280W
光学器件: 高效率镜头组, 变焦0° 至 2°
电子聚焦: 20米处, 40000LUX
通道模式: 16国际标准DMX512通道
水平扫描: 540° (16bit精度扫描)
垂直扫描: 280° (16bit精度扫描)
色 片 盘: 12个色片+白光,
带双向旋转的彩虹效果
图案盘: 13个图案片+白圆,
带图案抖动和图案任意定位功能
棱镜盘2个可旋转棱镜, 两个棱镜盘可叠加。
可正反方向旋转。
频 闪: 频闪频率最高可以10次每秒,
并可选择随机频闪及脉冲频闪
调 光: 0%~100%线性调光
雾 化: 0%~100%线性雾化
效果盘 : 六彩盘
电子整流器: 使产品重量更轻, 亮度更强,
灯泡更稳定, 更环保, 更节能
灯体尺寸: 长286×宽218×高465 (mm)
包装尺寸: 长345×宽280×高530 (mm)
净 重: 9.8公斤
毛 重: 11.5公斤


TECHNICAL PARAMETER:

VOLTAGE: AC100- 240V 50/60Hz
LIGHT SOURCE: 7R,230W
POWER CONSUMPTION: 280W
OPTICAL DEVICE: high efficiency lens group,0°-2°zoom
ELECTRONIC FOCUS: 20 meters, 40000 LUX
CHANNEL MODE: 16 standard DMX512 channel
LEVEL SCANNING: 540 (16 bit precision scan)
VERTICAL SCAN: 280 (16 bit precision scan)
COLOR WHEEL: 12color and white light
with two-way rotating and rainbow effect
GOBO WHEEL: 13 gobos and white circle
with design jitter and arbitrary positioning function
PRISM: 2 prism,2 prism wheel with superposition,
positive and negative rotation.
SHUT: shut up to 10 times per second,
random shut and pulse shut can be choosed
DIMMER: 0% ~ 100% linear dimmer
FROST: 0% ~ 100% linear frost
EFFECT: 6 color wheel
Electronic ballast : make the product more light and bright.
Lamp more stable environmental protection and
more energy saving
SWITCHING POWER SUPPLY : AC1G0 ~ 240 V, 50/60 HZ
FIXTURE DIMENSION: L286 ×W218 ×H465(mm)
PACKING DIMENSION: L345 ×W280 ×H530(mm)
NET WEIGHT: 9.8KG
GROSS WEIGHT: 11.5KG

Wireless Control panel



Multiple wireless model

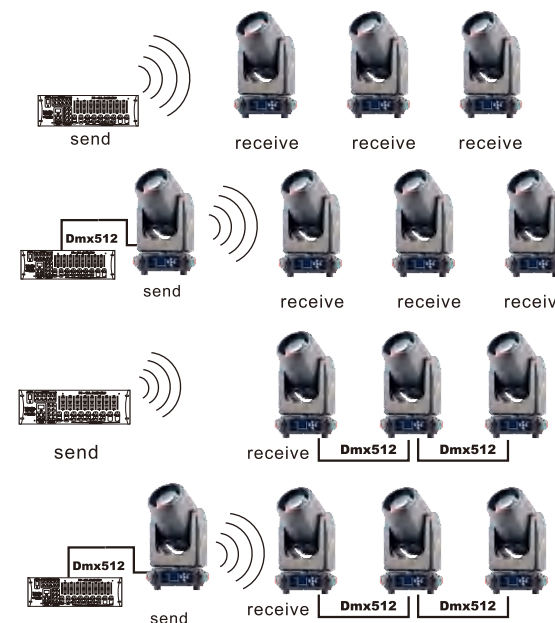

SR-230Mini DMX Channel Control			
CH1 Pan	0°	540°	255
CH2 Tilt	0°	250°	255
CH3 Pan Fine	0°	3.6°	255
CH4 Tilt Fine	0°	3°	255
Ch5 X/Y Speed	X/Y Speed Fast to slow		
Ch6 6 color	0	240-255	255
Ch7 Strobe	0	240-255	255
Ch8 Dimmer	0	240-255	255
Ch9 Color	0-7	8-15	16-23
Ch10 Color Adjust	0	255	255
Ch11 GOBO	0	255	255
Ch12 GOBO Stroke	0	255	255
Ch13 Focus	0	255	255
Ch14 Prism1 rotate	0	255	255
Ch15 Prism2 rotate	0	255	255
Ch16	100-105	200-205	255

YLD-740



4in 1 LED moving head Lights

四合一 LED 摇头灯

LED

技术参数:

电压: AC100~240V 50/60HZ
功率: 350W
灯珠: 7 颗 40W 四合一 LED 灯珠
控制方式: DMX512、自走、主从、声控、带 RDM 功能。
通道: CH21, CH49。
调光: 32bit 0~100%线性调光
特点: 摇头+染色+爆闪+旋转
工作温度: -30 度~50 度
频闪频率: 1~30HZ
外观: 金属、黑色
连接方式: DMX512 输入输出 / 电源输入输出。
IP 等级: IP20
灯体尺寸: 30*23*38 (cm)
包装尺寸: 44*38*45 (cm)
净重: 5.9kg
毛重: 7.5kg

TECHNICAL PARAMETER:

Voltage: AC100 ~ 240V 50 / 60Hz
Power: 350W
Lamp beads: 7 pcs 40W four in one LED lamp beads
Control mode: DMX512, self-propelled, master-slave, voice control, with RDM function.
Channel: CH21, CH49.
Dimming: 32bit 0 ~ 100% linear dimming
Features: shake head + dye + explosion flash + rotation
Working temperature: - 30 ~ 50 °C
Stroboscopic frequency: 1 ~ 30Hz
Appearance: metal, black
Connection mode: DMX512 I / O / power I / O.
IP rating: IP20
Fixture size: 30*23*38(cm)
Packing size: 44*38*45(cm)
Net weight: 5.9kg
Gross weight: 7.5kg

Effect Drawing



YLD-3715




技术参数:

电压: AC100V-240V 50/60HZ
功率: 600W
灯珠: 37x15W, 四合一 LED
寿命: 50000 小时
颜色: 红、绿、蓝、白多色
调焦: 4°-60°DMX 线性调焦, 具有自动调焦功能
色温控制: 内置 CTO DMX 线性调光
控制模式: 22 (流线型) / 50 (标准)
2 通道控制模式, 标准 DMX512 协议, RDM 协议
调光: 电子调光 0~100%线性调节
防护等级: IP20, 可选防雨等级可达 IP44
净重: 13.50KG
毛重: 15.55KG
产品尺寸: 35*29*41(CM)
包装尺寸: 47*34*52(CM)

TECHNICAL PARAMETER:

Voltage: AC100V-240V 50/60Hz
Power: 600W
Light source : 37 X 15W four in one LED
Approved life: 50,000 hours
Color: red, green, blue and white multi-color
Focusing: 4 ° -60 ° DMX linear focus, with automatic focus function
Color temperature control: built-in CTO DMX linear dimming
Control mode: 22 (streamlined) / 50 (standard)
2 channel control mode, standard DMX512 protocol, RDM protocol
Dimming: electronic dimming 0 ~ 100% linear adjustment
Protection grade: IP20, optional rain cover protection grade up to IP44
Net weight: 13.50KG
Gross weight: 15.55KG
Product size: 35*29*41(CM)
Package size: 47*34*52(CM)

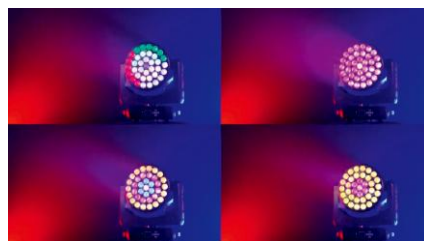

LED

200W / 400W LED moving head light
200W / 400W LED 摇头面光灯

SFM-400/200






技术参数:

额定电压: AC100V-240V 50/60HZ
总功率: 450W/250W
光源: 400W/200W COB LED 灯珠 5600K 色温
寿命: 50000 小时
颜色: 6000K 正白 LED, 带 CTO 色温校正
显示指数: 大于 95
调光: 0-100%线性调光, 带 CTO 色温校正
频闪: 频闪 1-25Hz
IP 防护等级: 室内 IP20
出光角度: 电动调焦, 调焦角度 5-50 度
控制信号: 国际标准 DMX512 信号
X 轴运行角度: 540° (16bit) 线性校正
Y 轴运行角度: 270° (16bit) 线性校正
通道数量: 10CH
控制方式: 主从, 自走, 标准 DMX512, 声控
散热方式: 风冷+自然散热
散热控制: 主板智能温控系统, 超温过热自动保护
材料: 铝
机箱颜色: 黑色
工作环境: -20° C~40° C
产品毛重: 10.5Kg
高显指: CRI >95
带 RDX 功能, 智能风扇, 温度检测
超高亮度, 节能高效, 可代替传统 1000W—3000WPAR 灯

TECHNICAL PARAMETER:

Rated voltage: AC100V-240V 50/60Hz
Total power: 450W / 250W
Light source: 400W / 200W COB LED Beads
5600K color temperature
Lifetime: 50000 hours
Color: 6000K white LED with CTO color temperature correction
Display index: >95
Dimming: 0-100% linear dimming with CTO color temperature correction
Strobe: Strobe 1-25Hz
IP Rating: indoor IP20
Light angle: Electric focusing, focusing angle 5-50 degrees
Control signal: International standard DMX512 signal
X-axis operating angle: 540° (16bit) linear correction
Y-axis operating angle: 270° (16bit) linear correction
Number of channels: 10CH
Control mode: master-slave, self-propelled, standard DMX512, voice control
Heat dissipation method: air cooling+natural heat dissipation
Heat dissipation control: Main board intelligent temperature control system, automatic protection for over temperature and overheating
Material: Aluminum
Case color: black
Working environment: -20 ° C ~ 40 ° C
Gross weight: 10.5Kg
High display index: CRI>95
Equipped with RDX function, intelligent fan, temperature detection
Ultra high brightness, energy-saving and efficient, can replace traditional 1000W-3000WPAR lights

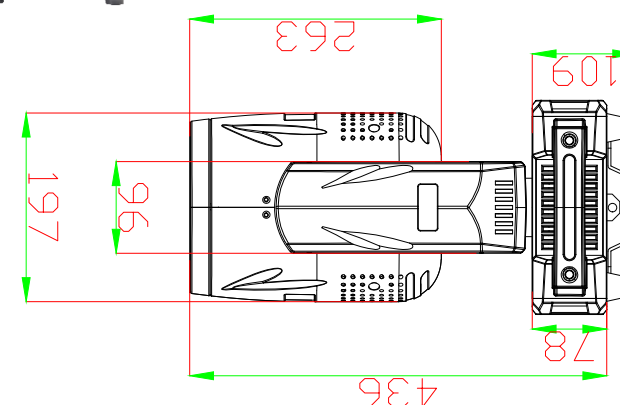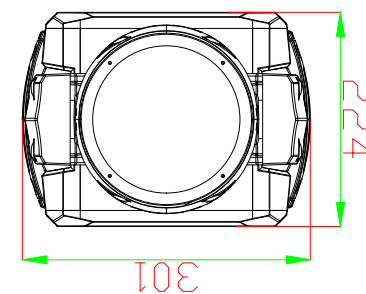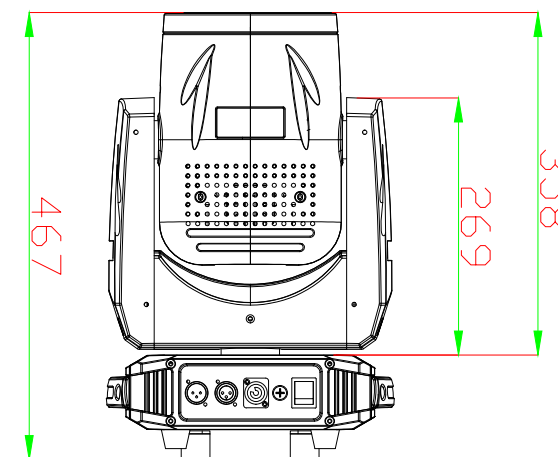

SKYSTAR

FS-400M

400W Follow Spot Light
400W LED 追光灯


LED

TECHNICAL PARAMETER:



Power: AC 100-240V 50HZ/60HZ
 Light source: 400W LED
 Power consumption: 450W
 Beam angle: 3°-12° adjustable
 zoom: 6-15° adjustable
 Cast distance 60-70 meters
 Color: 6 colors+open
 CTO 3200K-7500K stepless adjustable
 Strobe 1/20sec -2 SEC adjustable
 Dimmer: 0-100% adjustable
 High brightness: 20M/4300LUX
 Control mode: electronic push button/DMX512 control
 Cooling system: convection cooling-fan, optimize internal air duct way, heat elimination rapidly
 IP grade: Ip20
 According to various kinds of safety standards, Light weight, easily use As well as the stage, multi-functional studio and disco, wedding ceremony.
 FIXTURE DIMENSION: L890×W290×H290(mm)
 PACKING DIMENSION: L930×W330×H340(mm)
 Net weight: 15kgs
 Gross weight: 17kgs

FS-400M >>光效图

LUX 6°	20000	4300	2100	1000
LUX 15°	6000	1200	600	300

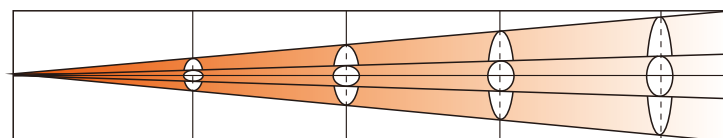

Shoot distance(m)	10	20	30	40
15° beamAngle Diameter(m)φ	1.8	3.6	5.4	7.2
6° beamAngle Diameter(m)φ	0.9	1.8	2.7	3.6

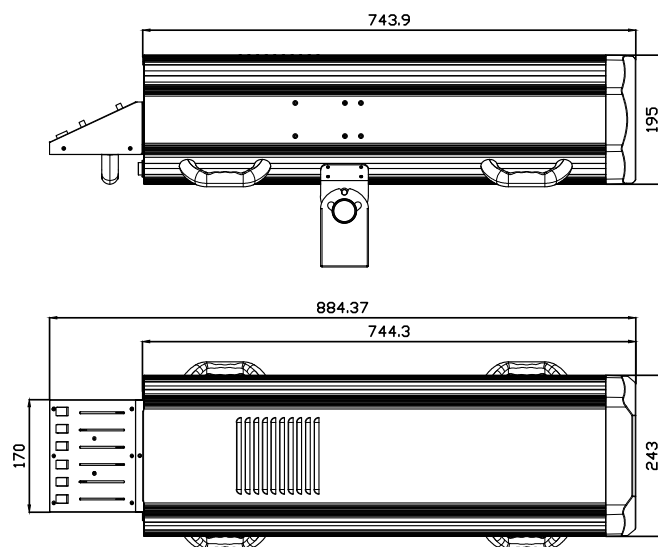

技术参数:

电源: AC 100-240V 50HZ/60HZ
 光源: 400W LED
 功耗: 450w
 光束角度: 3° -12° 可调
 变焦: 6 - 15° 可调
 投掷距离: 60-70米
 颜色: 6种颜色+白光可调
 CTO 3200K-7500K 无极可调
 频闪 1/20秒-2秒可调
 调光: 0 - 100%
 高亮度: 20 m / 4300LUX
 控制方式: 电子推送 按钮/ DMX512控制
 冷却系统: 轴流风扇致冷, 内部优化风路设计, 散热充分良好.
 IP等级: Ip20
 根据各种安全标准, 重量轻, 使用方便可以用于舞台、多功能演播室和迪斯科舞厅, 婚礼仪式等多种场合。
 产品尺寸: L890×W290×H290 (mm)
 包装尺寸: L930×W330×H340 (mm)
 净重: 15公斤
 毛重: 17公斤

LED

400W Follow Spot Light
400W LED 追光灯

SKYSTAR

FS-400X



TECHNICAL PARAMETER:


Power: AC 100-240V 50HZ/60HZ
 Light source: 400W LED
 Power consumption: 450W
 Beam angle: 3°-12° adjustable
 zoom: 6-15° adjustable
 Cast distance 60-70 meters
 Color: 6colors+open
 Dimmer: 0-100% adjustable
 High brightness: 20M/4300LUX
 Manual control, very easy to use
 Cooling system: convection cooling-fan, optimize internal air duct way, heat elimination rapidly
 IP grade: Ip20
 According to various kinds of safety standards, Light weight, easily use As well as the stage, multi-functional studio and disco, wedding ceremony.
 FIXTURE DIMENSION: L790×W290×H290(mm)
 PACKING DIMENSION: L845×W330×H335(mm)
 Net weight: 12.5kgs
 Gross weight: 14.5kgs

技术参数:



电源: AC 90-240V 50HZ/60HZ
 光源: 400W LED
 功耗: 450w
 光束角度: 3° -12° 可调
 变焦: 6 - 15° 可调
 投掷距离: 60-70米
 颜色: 6种颜色+白光可调
 调光: 0 - 100%
 高亮度: 20 m / 4300LUX
 控制方式: 手动控制
 冷却系统: 轴流风扇致冷, 内部优化风路设计, 散热充分良好.
 IP等级: Ip20
 根据各种安全标准, 重量轻, 使用方便可以用于舞台、多功能演播室和迪斯科舞厅, 婚礼仪式等多种场合。
 产品尺寸: L790×W290×H290 (mm)
 包装尺寸: L845×W330×H335 (mm)
 净重: 12.5公斤
 毛重: 14.5公斤

FS-400X >>光效图

LUX 6°	20000	4300	2100
LUX 15°	6000	1200	600

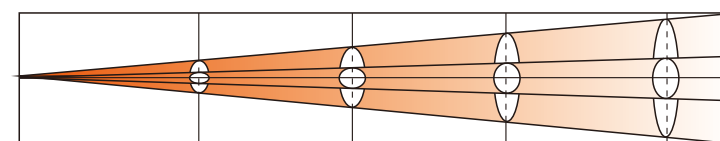

Shoot distance(m)	10	20	30
15° beamAngle Diameter(m)φ	1.8	3.6	5.4
6° beamAngle Diameter(m)φ	0.9	1.8	2.7

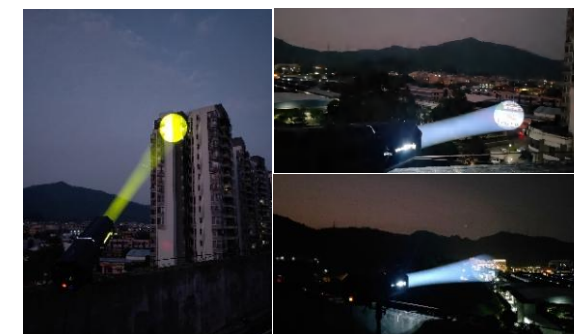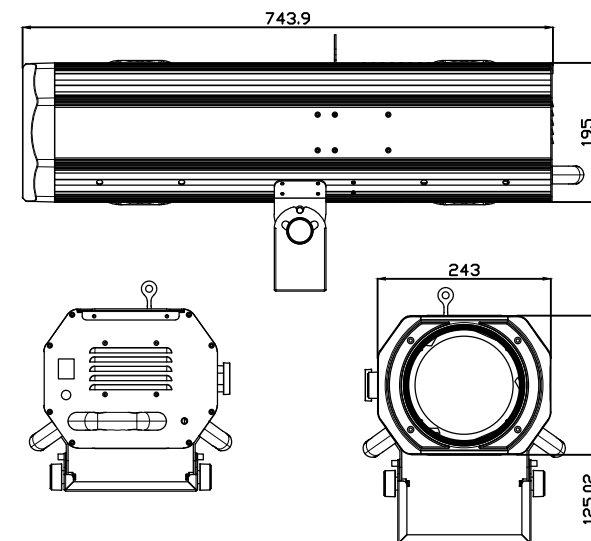


SKYSTAR

SHADOW-300M/400M



SHADOW-300/400

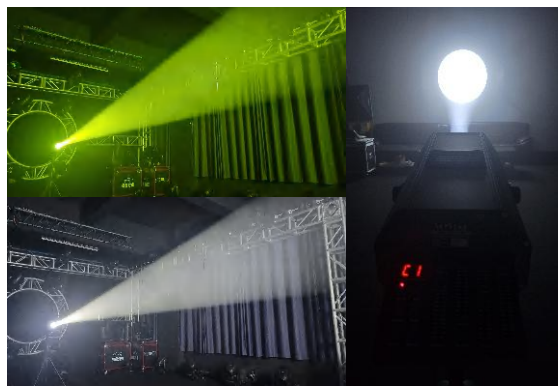

300W/400W Follow Spot Light

300W / 400W LED 追光灯

LED

技术参数:

工作电压: AC100-240V 50Hz/60Hz
光 源: 400W LED / 300W LED
功 率: 430W / 400W
光斑角度: 3°至 15°可调
投射距离: 40-50 米
轻便,亮度度(超越传统 1200W 追光灯亮度)
●5 种颜色+白光, 彩虹效果
●控制方式:电子推送.按钮/ DMX512 控制(SHADOW-300M/400M)
手动控制 (SHADOW-300/400)
●轴流风扇致冷, 内部优化风路设计, 散热充分良好;
●符合各种安全保护, Ip20 保护等级;
●适用于舞台、婚庆、多功能演艺厅及迪斯科等场合。
灯具尺寸: 长 525×宽 245×高 225(mm) (SHADOW-300/400)
长 605×宽 245×高 225(mm) (SHADOW-300M/400M)
包装尺寸: 长 645×宽 290×高 275(mm) (SHADOW-300/400)
长 665×宽 290×高 270(mm) (SHADOW-300M/400M)
净 重: 8.5 公斤 (SHADOW-300/400)
10.5 公斤 (SHADOW-300M/400M)
毛 重: 9.5 公斤 (SHADOW-300/400)
12 公斤 (SHADOW-300M/400M)
可订制拉杆航空箱, 轮子拆卸方便。
航空箱尺寸: 45x35x78 (cm) (SHADOW-300/400)
42x35x78(cm) (SHADOW-300M/400M)
航空箱重量: 12.6kg(SHADOW-300/400)
12.5kg(SHADOW-300M/400M)

TECHNICAL PARAMETER:

Voltage: AC100-240V, 50Hz/60Hz
Light source: 400W LED / 300W LED
Power: 430 W / 400W
Beam Angle: adjustable from 3°to 15°
Cast distance: 40-50 m
Lightweight, high brightness(Beyond the brightness of traditional 1200W pursuit lights)
●5 colors + white,rainbow Effect
●Control method:
electronic push button/DMX512 control (SHADOW-300M/400M)
Manual Control(SHADOW-300/400)
●Convection cooling-fan, optimize internal air duct way, heat elimination rapidly
●According to various kinds of safety standards, IP protect grade.
●Suitable for stage, wedding, multi-function performance hall and disco etc.
Fixture size: L525×W245×H225(mm) (SHADOW-300/400)
L605×W245×H225(mm) (SHADOW-300M/400M)
Carton size: L645×W290×H275(mm) (SHADOW-300/400)
L665×W290×H270(mm) (SHADOW-300M/400M)
Net weight: 8.5kg (SHADOW-300/400)
10.5kg (SHADOW-300M/400M)
Gross weight: 9.5kg (SHADOW-300/400)
12kg (SHADOW-300M/400M)
Customizable trolley flightcase with convenient wheel disassembly.
Flightcase size: 45 x 35 x 78 (cm) (SHADOW-300/400)
42 x 35 x 78(cm) (SHADOW-300M/400M)
Flightcase weight: 12.6kg(SHADOW-300/400)
12.5kg(SHADOW-300M/400M)



SKYSTAR

LED

600W Follow Spot Light

600W LED 追光灯

FS-4500

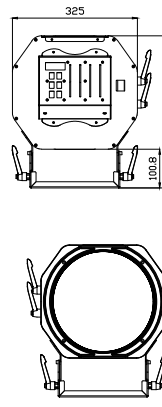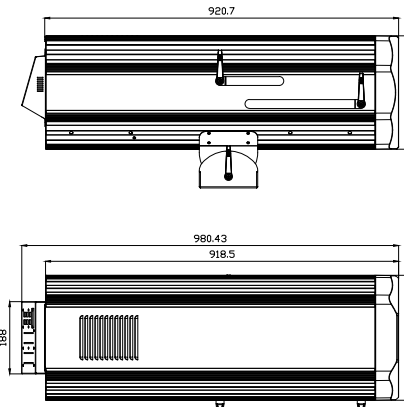


技术参数:

工作电压: AC90-240V 50Hz/60Hz
光 源: LED 模组
功 率: 600W
变焦角度: 3°至 12° 可调
光圈角度: 2°至 12° 可调
投射距离: 200-300米
颜色: 6种颜色++白光
CTO色温校正: 3200-7500K无极调节
照度: 80M/2000LUX
有效光通量: 20000 lm
光学系统手动控制, 功能电控面板
革命化光源和光学系统使其成为光效最强LED 追光灯照度媲美任何专业追光灯
适用于大型舞台、户外表演等场合。
灯具尺寸: 长990×宽350×高320 (mm)
航空箱包装 (含支架) 尺寸:
长1140×宽600×高730 (mm)
净 重: 35 公斤
毛 重: 68 公斤
(含航空箱和支架)

TECHNICAL PARAMETER:





Operating voltage: AC90-240V 50Hz/60Hz
Light source: LED module
Power: 600W
Zoom angle: 3 -12 degrees adjustable
Aperture angle: 2 -12 degrees adjustable
Projection distance: 200-300 meters
Color: 6 colors+ white
CTO color temperature correction: 3200-7500K
stepless adjustment
Illumination: 80M/2000LUX
Effective luminous flux: 20000 lm
Optical system manual control, functional electronic control panel
Revolutionary light sources and optical systems make it become the most bright efficient LED follow spot lightThe illumination is comparable to any professional follow spot light
Suitable for large-scale stage, outdoor performances and other occasions.
size: 990 × 350 × 320 (mm)
Flightcase packaging (including stand) size:
1140 × 600 × 730 (mm)
Net weight: 35 kg
Gross weight: 68 kg (including flightcase and stand)

FS-4500 >>光效图

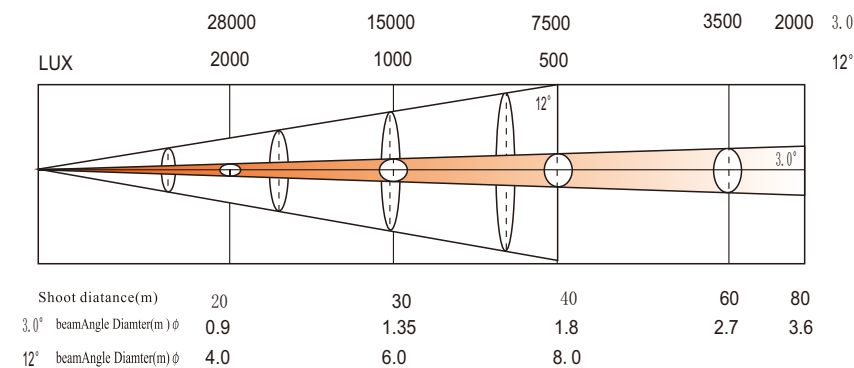

SKYSTAR

SW-311/381/SW-1000



Waterproof Moving Head Lights 防水摇头灯

LAMP

技术参数:

输入电压: AC110-220V 50-60Hz
光源: 欧司朗原装灯泡 311W / 381W / LED 激光光源
功率: 380W / 450W / 180W
电子聚焦: 20 米处, 150000LUX(SW-311)
20 米处, 160000LUX(SW-381)
20 米处, 180000LUX(SW-1000)
色盘: 11 种颜色+白光
图案: 12 个固定图案+6 个白圆
光束角度: 1.8°
透镜出光直径: 165mm
棱镜: 标配 16 棱镜, 8 棱镜 (可定制)
调光: 0-100%线性调光
调焦: 线性调焦
旋转角度: 水平 540°, 垂直 270°
自动回位纠错功能, 具有 16bit 精度调节)
频闪: 双片式频闪, 0.5-9 次/秒可调
雾化: 均匀雾化效果
控制方式: DMX 512, 自走, 主从机
通道: 标准 16 通道
灯体尺寸: 355×320×562mm
灯具材料: 采用阻燃耐高温, 抗紫外线,
抗老化的尼龙加纤塑料外壳
防护等级: IP56

TECHNICAL PARAMETER:

Power supply: AC110-220V 50-60Hz
Light source: Osram 311W original light bulbs
Osram 381W original light bulbs
100W LED laser
ELECTRONIC FOCUS: 20meters, 150000LUX (SW-311)
20meters, 160000LUX (SW-381)
20meters, 180000LUX (SW-1000)
Color wheel: 11 colors+white light
Gobo wheel: 12 fixed gobos+6 white circles
Beam angle: 1.8°
Lens output diameter: 165mm
Prism: Standard with 16 and 8 prisms (customizable)
FOCUS: Linearly adjustable
DIMMER: 0~100% linearly adjustable
PAN AND TILT: Smooth, automatic Pan & Tilt
position correction, speed adjustable
RANGE: Pan-540°, Tilt-270° (16-bit)
Strobe: Dual panel strobe,
adjustable from 0.5 to 9 times per second
Frost: 0 - 100% Linear frost
Control mode: DMX 512, self-propelled, master-slave
Channel: Standard 16 channels
Fixture dimension: 355 × 320 × 562mm
Lamp material: Made of flame retardant,
high temperature resistant, and UV resistant materials.
Anti aging nylon fiber reinforced plastic shell
Protection level: IP56

SW-381 DMX Channel Control

CH1	0-7	8-15	16-23	24-31	32-39	40-47	48-55	56-63	64-71	72-79
Color										
CH2	0	240	241-255							
CH3	0	240	241-255							
CH4	0	128-191	192-255							
CH5	0	255								
CH6	0	31	128	255						
CH7	0	31	128	255						
CH8	0	31	128	255						
CH9	0	255								
CH10	0	255								
CH11	0	255								
CH12	0	255								
CH13	0	255								
CH14	0	255								
CH15	0	255								
CH16	0	255								

LED

Waterproof Lights 防水灯

SKYSTAR

WED-200C



技术参数:

电压: AC100-240V, 50-60Hz
功率: 200W
灯珠: 200w cob
2 个标准 DMX512 通道
颜色: 4500K / 6500K / 7500K 白 / RGBW
多种闪光变化: 1 ~ 25 次/秒
(常规闪光、闪电闪光、随机频闪、
闪光突然变暗) 线性调节
控制方式: DMX512 信号控制方式,
主从控制方式 (多路同步), 具有自走功能
电子调光从 0 到 100% 线性调整
器
显示面板: LED 显示面板
防水等级: IP65
保护: 过流、过压、温保
预期使用寿命: 50,000 小时
灯体尺寸: L240×W300×H420mm
包装尺寸: L280x W280 x H480mm
净重: 8.75 公斤

TECHNICAL PARAMETER:

VOLTAGE: 100 ~ 240V AC, 50 ~ 60Hz
Power: 200W
Lamp beads: 200W COB
2 standard DMX512 channels
Color: 4500K / 6500K / 7500K white available / RGBW
A variety of Flash: 1 ~ 25 times / sec
(conventional strobe, lightning flash,
random strobe, strobe light suddenly getting dark,
sudden dimming strobe light) linear regulator
Control Mode: DMX512 signal control mode,
master-slave control mode (Multiple simultaneous)
procedures with self-propelled
Electronic dimming from 0 to 100% linear regulator
Display panel: LED display panel
Waterproof grade: IP65
Protection: over current, over voltage,
temperature and security
Expected useful life: 50,000 hours
DIMENSIONS: L240×W300 ×H420mm
PACKING SIZE: L280x W280 x H480mm
Net weight: 8.75kg

WED-220



技术参数:

电压: AC100V - 220V
功率: 250 W
光源: 4PCS 50W COB LED
暖白色+冷白色 RGBW
控制方式:
dmx512 / 声音/自动/手动/主从
防水: IP65
外壳: 铝
镜头角度: 25 度
控制通道: 8CH
灯体尺寸: L275×W225×H325mm
净重: 5 公斤

TECHNICAL PARAMETER:

Voltage: AC100V-220V
Power: 250 W
Light source: 4PCS 50W COB LED
Warm white + cold white RGBW
Control mode:
DMX512 / voice/automatic/manual/master slave
Waterproof: IP65
Aluminum shell
Lens Angle: 25 degrees
Control channel: 8CH
Size: L275×W225×H325mm
Net weight: 5 kg

WED-1200



技术参数:

特点:
自动模式 LED 照明系统, 创造无数效果。
光源: 120×10w 4in1 LED
控制器: DMX-512/跟随, 自愿, 声学激活
标准 DMX 通道: 8/12ch
IP 地址设置
3 核 DMX 插孔。
颜色: R、G、B3 分离或混合颜色带来各种效果。
该设备不产生红外线和紫外线, 带来的热量最小, 降低了娱乐场所火灾的风险。
应用范围: 商店、舞台、夜总会、美术馆等。
LED 光源, 更节能耐用。
声学控制模式 (灵敏度可调)。
电源: AC100-240V/50-60Hz
最大功耗: 1200 VA
尺寸 (长 x 宽 x 高) 700x380x540mm
重量: 30kg
工作环境: 室内-20° C-50° C

TECHNICAL PARAMETER:

Features:
Automatic Mode LED lighting system, creating numerous effects.
Light source: 120×10w 4in1 LED
Controller: DMX-512/following, voluntary, acoustic-activation
Standard DMX Channel: 8/12ch
IP address setting
3 cores DMX Jack socket.
Color: R,G,B 3 separate or mixed color bring various effects.
The device do not generate infrared ray and ultraviolet ray, bringing the least heat, which reduces the risk of conflagration for entertainment venue.
Application: shops and stores, stages, night clubs, art gallery and so on.
LED light source, saving more energy and durable
.Acoustic control mode(sensibility adjustable).
Power supply: AC100-240V/50-60Hz
Maximum electricity consumption: 1200 VA
Dimension(L x W x H) 700x380x540mm
Weight: 30kg
Working environment: indoor -20°C - 50°C



8CH

HLD-18M DMX Channel Control	
CH1 Dimmer	0-255
CH2 Strobe	0-255
CH3 AUTO	0-255
CH4 Speed	Slow Fast
Ch5 RED	0-255
Ch6 GREEN	0-255
Ch7 BLUE	0-255
Ch8 White	0-255

12CH

Ch9 RED 2	0-255
Ch10 GREEN 2	0-255
Ch11 BLUE 2	0-255
Ch12 White 2	0-255



WED-600





技术参数:

输入电压: 110-240V AC, 50/60Hz
光源: 60PCS x10W(4 合 1 LED)
额定功率: 600W;
光源寿命: 50000 小时;
颜色: RGBW, 可分别独立调节, 可频闪, 可调亮度。
光束发散角度: 25° (45° / 60° 可选)
通道: 4/6/9 通道
控制模式: 声控、程序自走、主从、DMX512 控制
LED 大彩屏显示操作面板
环境温度: -30°C ~40°C
Y 轴: 人工可调节 45~145 度
防护等级: IP65
净重: 16KG
尺寸: 570*230*270mm
特点: 与传统灯具比, 具有耗电量小, 光效高, 色彩变幻丰富, 光源寿命长, 安全性能高, 宽电压范围均可正常工作, 适应范围广。

TECHNICAL PARAMETER:

Voltage: AC100-240V, 50/60Hz
Power: 650W
Light Source: 60X10W RGBW 4in1 LED
IP Rating: IP65
Lifespan: around 100,000 hours
Housing: Die-casting aluminum, powder-coated finish
Channel: DMX 512, 4/6/9CH
Control Mode: DMX, Auto, Master/Slave mode
Dimmer: 0-100%
Strobe: 0-20Hz
Beam angle: 25°
N.W: 16KG

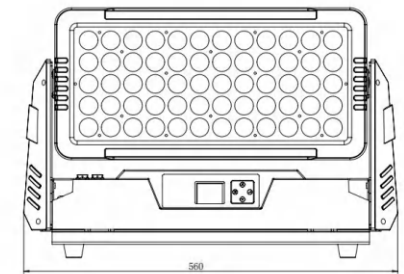

WED-960



技术参数:

电压: AC100~240V 50/60HZ
功率: 380W
灯珠: 960 颗 RGB+W, 12+12 段
控制方式: DMX512、自走、主从、声控、带 RDM 功能。
通道: CH4、CH16、CH48
调光: 32bit 0~100%线性调光
特点: 爆闪+染色+效果
工作温度: -30 度~50 度
频闪频率: 1~30HZ
外观: 金属、黑色
连接方式: DMX512 输入输出 / 电源输入输出。
IP 等级: IP 67
重量: 8.9Kg

TECHNICAL PARAMETER:

Voltage: AC100~240V 50/60HZ
Power: 380W
Lamp beads: 960 RGB+W, 12+12 segments
Control mode: DMX512, self-propelled, master-slave, voice control, with RDM function.
Channels: CH4, CH16, CH48
Dimming: 32bit 0-100% linear dimming
Features: Flash+Wash+Effect
Working temperature: -30 ° C~50 ° C
Strobe frequency: 1-30Hz
Appearance: Metal, black
Connection method: DMX512 input/output /power input/output.
IP grade: IP 67
Net weight: 8.9kg

Strobe Lights
频 闪 灯

LED



技术参数:

电压: AC100~240V 50/60HZ
功率: 90W
灯珠: 441 颗 5050 RGB 灯珠
控制方式: DMX512、自走、主从、声控、带 RDM 功能。
通道: CH1、CH18、CH154、CH162
调光: 32bit 0~100%线性调光
特点: XY 摇头+爆闪+染色
工作温度: -30 度~50 度
频闪频率: 1~30HZ
外观: 金属、黑色
连接方式: DMX512 输入输出 / 电源输入输出。
IP 等级: IP20
外包装: 64*64*37cm
内包装: 31*31*34cm
净重: 4.1KG
毛重: 17.2KG



TECHNICAL PARAMETER:

Voltage: AC100~240V 50/60HZ
Power: 90W
Lamp beads: 441 5050 RGB lamp beads
Control mode: DMX512, self-propelled, master-slave, with RDM function.
Channels: CH1, CH18, CH154, CH162
Dimming: 32bit 0-100% linear dimming
Features: XY shake head+burst flash+dyeing
Working temperature: -30°C ~ 50°C
Strobe frequency: 1-30Hz
Appearance: Metal, black
Connection method: DMX512 input/output/power input/output.
IP level: IP20
External packing: 64*64*37cm
Inside packing: 31*31*34cm
Net weight: 4.1KG
Gross weight: 17.2KG



技术参数:

·电压: AC100~240V 50/60HZ
·功率: 280W
·灯珠: 864颗5050三色LED灯珠+96颗白色LED
·控制方式: DMX512、自走、主从、声控、带 RDM功能。
·通道: CH04、CH12、CH32
·调光: 32bit 0~100%线性调光
·特点: 8+8段跑马+染色+爆闪
·工作温度: -30°C~50°C
·频闪频率: 1~30HZ
·连接方式: DMX512输入输出 / 电源输入输出。
·IP 等级: Ip20
·内箱尺寸: 54*29*22cm
·外箱尺寸: 56*31*48cm(一装二)
·产品净重: 3.45kg 产品毛重: 6.75kg




技术参数:

·电源供应: AC100~240V, 50Hz/60Hz
·额定功率: 400W
·机箱材质: 铝
·灯珠型号: 5050RGB0.5w 3in1
·发光颜色: RGB
·电源连接: 电源线
·信号连接: 信号输入线/输出线
·频闪: 1~20Hz
·特点: 内置RDM
·控制通道: 6~16CH个DMX-512信号通道
·控制方式: 国际标准信号、DMX-512信号控制、声控、自走及主从模式
·冷却系统: 风机强制冷却系统
·工作环境: 室内
·包装方式: 航空箱或纸箱
·内盒尺寸: 54*29*22cm
·外箱尺寸: 56*31*48CM (一装二)
·净重: 3.4Kg
·毛重: 6.7Kg

TECHNICAL PARAMETER:

·Power supply: AC100~240V, 50Hz/60Hz
·Rated power: 400W
·Case Material: Aluminum
·Light bead model: 5050RGB0.5w 3in1
·Glow color: RGB
·Power connection: power cord
·Signal connection: signal input line/output line
·Strobe: 1~20Hz
·Features: Built in RDM
·Control channels: 6~16CH DMX512 signal channels
·Control methods: international standard signal, DMX-512 signal control, voice control, self-propelled and master-slave mode
·Cooling system: forced fan cooling system
·Working environment: indoor
·Packaging method: Air box or cardboard box
·Inner box size: 54 * 29 * 22cm
·Outer box size: 56 * 31 * 48CM (one in two)
·Net weight: 3.4Kg
·Gross weight: 6.7Kg

LED

Strobe Lights
频 闪 灯

技术参数:

·电源供应: AC110V~240V 50~60Hz
·功率: 150W
·灯珠: 240 颗 0.5W 5730 灯珠, 480 颗 0.3W RGB 灯珠
·控制方式: DMX512、自走、主从、声控、带 RDM 功能
·通道: CH4、CH16、CH168
·调光: 16bit 0~100%线性调光
·特点: 跑马+爆闪
·工作温度: -30 度~50 度
·频闪频率: 1~30HZ
·外观: 金属、黑色
·连接方式: DMX512 输入输出 / 电源输入输出。
·IP 等级: Ip20
·灯尺寸: 97*6.8*6CM
·净重: 2.8KG

技术参数:

·电源供应: AC110V~240V 50~60Hz
·核定功率: 200W
·机壳材质: 铝型材+金属
·LED光源: SMD5050LED-RGB
·电源连接: 电源输入/输出线
·信号连接: XLR三芯和五芯进出
·控制通道: 3~5~8~36~72~144CH区控
·区控点控: 12~24~36~48 区控效果
·频闪频率: 1~25Hz
·控制方式: 数码显示、DMX-512, RDM支持双向通信协议
·冷却系统: 内置有铝散热和超静音滚珠风机结合冷却系统实现高效冷却
·工作环境: 室内
·灯具功能设计适用: 夜总会, DISCO, 酒吧, 娱乐PARTY等场所
·包装方式: 纸箱或航空箱
·产品尺寸: 97*6.7*6CM (含提手高度 15.4CM)
·内盒尺寸: 100x8.8x17CM
·外箱尺寸: 105x15x21CM(一装二)
·产品净重: 4.0kg/台
·产品毛重: 4.4kg/台

技术参数:

室内 36pcs LED 每个像素控制 LED 光束
LED: 36x3W RGB 3in1 LED
电源: 120w
镜头角度: 3-5°
控制方式: 自动/主从/DMX512,
电源输入输出
DMX 通道: 3/4/6/7/8/12/13/24/25/60/61/120/121 CH
产品尺寸: 100*22*19cm
(主纸箱: 6个灯装1个纸箱)
净重: 2.5kg
IP 等级: IP20



TECHNICAL PARAMETER:

·Power supply: AC110V~240V 50~60Hz
·Power: 150W
·Light beads: 240 0.5W 5730 Light beads, 480 0.3W RGB Light beads
·Control mode: DMX512, self-propelled, master-slave, voice control, with RDM function
·Channels: CH4, CH16, Ch168
·Dimming: 16bit 0~100% linear dimming
·Features: Running horses+explosive flashes
·Working temperature: -30 ° C~50 ° C
·Strobe frequency: 1~30Hz
·Appearance: Metal, black
·Connection method: DMX512 input/output
·/Power input and output.
·IP level: Ip20
·Light size: 97 * 6.8 * 6CM
·Net weight: 2.8KG

TECHNICAL PARAMETER:

·Power supply: AC110V~240V 50~60Hz
·Rated power: 200W
·Shell material: aluminum profile+metal
·LED light source: SMD5050LED-RGB
·Power connection: power input/output lines
·Signal connection: XLR three core and five core inlet and outlet
·Control channel: 3~5~8~36~72~144CH area control
·Area control point control: 12~24~36~48 Area control effect
·Strobe frequency: 1~25Hz
·Control mode: Digital display, DMX-512, RDM supports bidirectional communication protocol
·Cooling system: Equipped with aluminum heat dissipation and ultra quiet ball fan combined with cooling system to achieve efficient cooling
·Working environment: indoor
·The functional design of lighting fixtures is suitable for places such as nightclubs, DISCO, bars, entertainment parties, etc
·Packaging method: cardboard box or aviation box
·Product size: 97 * 6.7 * 6CM (including handle height of 15.4CM)
·Inner box size: 100x8.8x17CM
·Outer box size: 105x15x21CM (one in two)
·Net weight of the product: 4.0kg/unit
·Product gross weight: 4.4kg/unit

TECHNICAL PARAMETER:

Indoor 36pcs LED each Pixel control LED Bar
LEDs: 36pcs 3W RGB 3in1 LED
Power Supply: 120w
Lens Angle: 3-5°
Control mode: Auto/Master-slave/DMX512
Power con in & out
DMX channels: 3/4/6/7/8/12/13/24/25/60/61/120/121 CH
Product Size: 100*22*19cm
(Master carton: 6pcs-in-1)
N. W: 2.5kg
IP Rate: IP20

