

SKYSTAR



广州亮星灯光科技有限公司

SKYSTAR LIGHTING LIMITED

地址：中国 广东 广州市天河区 龙洞迎龙大道260号龙山工业园E-1栋二层
电话：020-87022418
传真：020-87023011
移动电话：13602863513 13609702481
网址：www.lightskystar.com
电子邮箱：vinca2004@126.com, 1843755954@qq.com, 623872311@qq.com, 1725113820@qq.com, 1284963471@qq.com

Add: 2F., Building E-1, Longshan industry Park, No. 260 Yinglong RD., Longdong,
Tianhe District, Guangzhou China.
Web site: www.lightskystar.com
E-mail: vinca2004@126.com, 1843755954@qq.com, 623872311@qq.com, 1725113820@qq.com, 1284963471@qq.com
Tel: +8620-87022418
Fax: +8620-87023011
cellphone: +86 13609702481 (NIKI)
Whatsapp: +86 13602863513 (Jack)
+86 18902251183 (Lily)



广州亮星灯光科技有限公司

SKYSTAR LIGHTING LIMITED

2.5 Meter Led Flame Lights

TX-1000R/RT

2.5米 LED火焰灯



◎技术参数:

工作电压: AC200-240V 50Hz/60Hz
光源: 36X3W 红 (TX-1000R)
36X3W RGB 3合一 (TX-1000RT)
功率: 400W
频闪: 1-20次/秒 (TX-1000RT)
19个标准DMX512通道 (TX-1000RT)
火焰高度: 2.3米
火焰宽度: 0.9米
特点: 多彩火焰效果, 梦幻火焰颜色动感变化,
颜色变化, 速度可调, 颜色设有频闪功能
控制模式: 遥控模式, DMX512信号模式, 主从
控制模式 (多台同步) 带自走程序
工作环境: 室内0°C-40°C
预计使用寿命: 10000小时
符合各种安全保护, IP20保护等级;
适用于舞台、广告宣传、展览会等场合
灯具尺寸: 长1120×宽300×高340 (mm)
包装尺寸: 长1200×宽410×高440 (mm)
净重: 25公斤
毛重: 28公斤

◎TECHNICAL PARAMETER:

POWER: AC 200-240V 50Hz/60Hz
LIGHT SOURCE: 36X3W R (TX-1000R)
36X3W RGB 3IN1 (TX-1000RT)
POWER CONSUMPTION: 400W
STROBE: 1-20time/second (TX-1000RT)
19standard DMX512 channels (TX-1000RT)
Flame height 2.3M
Flame width 0.9M
Feature: colorful flame effect, fire color, adjustable,
Flash, Built-in programs
Control Mode: telecontrol mode,
DMX512 signal control mode,
master-slave control mode
(Multiple simultaneous)
procedures with self-propelled
Working environment: indoor 0°C -40°C
Expected useful life: 10000hours
According to various kinds of safety standards, IP20
protect grade
As well as the stage, exhibition, advertising.
FIXTURE DIMENSION: L1120x300x340(mm)
PACKING DIMENSION: L1200x410x440(mm)
NET WEIGHT: 25KG
GROSS WEIGHT: 28KG

同步自动运行连接图



◎技术参数:

工作电压: AC200-240V 50Hz/60Hz
光源: 72X3W RGB 3合一 LED
功率: 400W
频闪: 1-20次/秒
14个标准DMX512通道
火焰高度: 2.3米
特点: 圆型立体火焰效果, 梦幻火焰颜色动感变化,
颜色变化, 速度可调, 颜色设有频闪功能
控制模式: 遥控模式, DMX512信号模式, 主从
控制模式 (多台同步) 带自走程序
工作环境: 室内0°C-40°C
预计使用寿命: 10000小时
符合各种安全保护, IP20保护等级;
适用于舞台、广告宣传、展览会、
多功能演艺厅及迪斯科等场合。
灯具尺寸: 长620×宽620×高370 (mm)
包装尺寸: 长680×宽680×高440 (mm)
净重: 25公斤
毛重: 28公斤

2.5米 十字布LED火焰灯



◎TECHNICAL PARAMETER:

POWER: AC 200-240V 50Hz/60Hz
LIGHT SOURCE: 72x3w RGB 3IN1 LED
POWER CONSUMPTION: 400W
STROBE: 1-20time/second
14standard DMX512 channels
Flame height 2.3M
Feature: Circles 3D flame effect, fantastic fire color, adjustable,
Flash, Built-in programs
Control Mode: telecontrol mode,
DMX512 signal control mode,
master-slave control mode
(Multiple simultaneous)
procedures with self-propelled
Working environment: indoor 0°C -40°C
Expected useful life: 10000hours
According to various kinds of safety standards, IP20
protect grade
As well as the stage, multi-functional studio and disco,
exhibition, advertising.
FIXTURE DIMENSION: L620x350x290(mm)
PACKING DIMENSION: L400x400x340(mm)
NET WEIGHT: 25KG
GROSS WEIGHT: 28KG

无线系统连接图 1



3D Led Flame Lights

TX-2000

2.5米立体梦幻LED火焰灯



3D Led Flame Lights

TX-200

立体LED火焰灯



◎技术参数:

工作电压: AC200-240V 50Hz/60Hz
光源: 12X3W RGB 3合一 LED
功率: 100W
频闪: 1-20次/秒
14个标准DMX512通道
火焰高度: 1米
特点: 立体火焰效果, 梦幻火焰颜色动感变化, 颜色变化, 速度可调, 颜色设有频闪功能
控制模式: 遥控模式, DMX512信号模式, 主从控制模式(多台同步)带自走程序
工作环境: 室内0°C-40°C
预计使用寿命: 10000小时
符合各种安全保护, Ip20保护等级;
适用于舞台、婚庆、多功能演艺厅及迪斯科等场合。
灯具尺寸: 长350×宽350×高290(mm)
包装尺寸: 长400×宽400×高340(mm)
净重: 8公斤
毛重: 9公斤

◎ TECHNICAL PARAMETER:

POWER: AC 200-240V 50Hz/60Hz
LIGHT SOURCE: 12x3w RGB 3IN1 LED
POWER CONSUMPTION: 100W
STROBE: 1-20time/second
14standard DMX512 channels
Flame height: 1M
Feature: 3D flame effect, fantastic fire color, adjustable, Flash, Buillt-in programs
Control Mode: telecontrol mode, DMX512 signal control mode, master-slave control mode (Multiple simultaneous) procedures with self-propelled
Working environment: indoor 0°C-40°C
Expected useful life: 10000hours
According to various kinds of safety standards, IP20 protect grade
As well as the stage, multi-functional studio and disco, wedding ceremony.
FIXTURE DIMENSION: L350×350×290(mm)
PACKING DIMENSION: L400×400×340(mm)
NET WEIGHT: 8KG
GROSS WEIGHT: 9KG

无线系统连接图 2



LED FLAME LAMP CONTROLLER

TC-200

LED火焰灯控制器

◎技术参数:


工作电压: AC200-240V 50Hz/60Hz
功率: 20W
特点: 内置8个程序, 可定做不同图案变化的程序。
控制模式: DMX512信号模式, 可控25台TX-200火焰灯, 每灯可不同变化。
工作环境: 室内0°C-40°C
适用于舞台、广告宣传、展览会、多功能演艺厅及迪斯科等场合。
灯具尺寸: 长305×宽170×高75 (mm)
包装尺寸: 长360×宽220×高120 (mm)
净重: 1.5公斤
毛重: 3公斤

◎ TECHNICAL PARAMETER:

POWER: AC 200-240V 50Hz/60Hz
POWER CONSUMPTION: 20W
Feature: Built-in 8 programs, can be customized different program with different design
Control Mode: DMX512 signal control mode, control 25 pcs TX-200
Working environment: indoor 0°C-40°C
As well as the stage, multi-functional studio and disco, exhibition, advertising.
FIXTURE DIMENSION: L305x170x75mm
PACKING DIMENSION: L360x220x120(mm)
NET WEIGHT: 1.5KG
GROSS WEIGHT: 3KG



控制台系统连接图

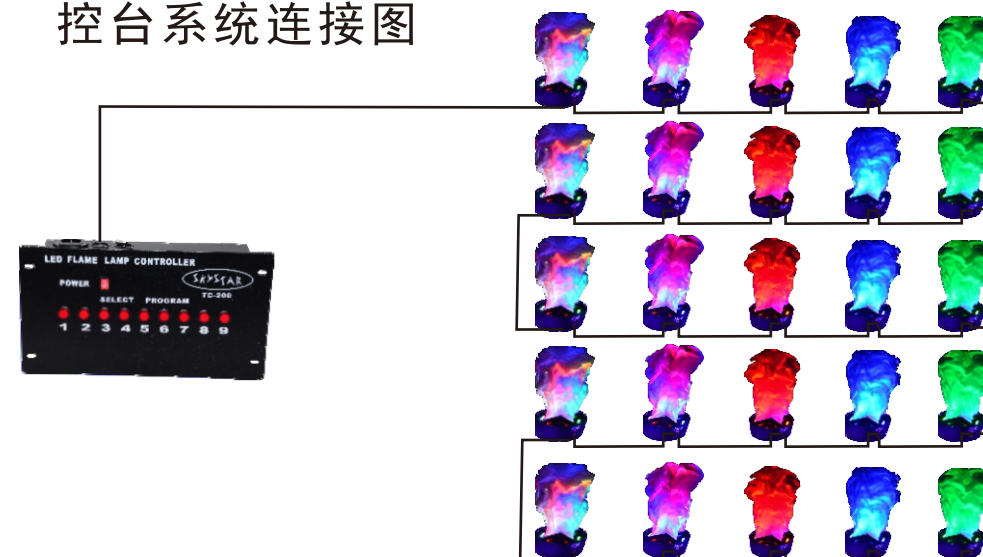

TX-100

LED火焰灯

◎技术参数:

工作电压: AC90-240V 50Hz/60Hz
光源: 12X3W LED
红=4颗, 蓝=4颗, 绿=4颗
功率: 120W
频闪: 1-20次/秒
6个标准DMX512通道
特点: 多种火焰颜色动感变化, 颜色变化速度可调, 颜色设有频闪功能
控制模式: 遥控模式, DMX512信号模式, 主从控制模式(多台同步)带自走程序
工作环境: 室内-20°C-40°C
预计使用寿命: 10000小时
符合各种安全保护, Ip20保护等级;
适用于舞台、婚庆、多功能演艺厅及迪斯科等场合。
灯具尺寸: 长530×宽265×高335(mm)
包装尺寸: 长590×宽330×高400(mm)
净重: 11公斤
毛重: 13公斤

◎ TECHNICAL PARAMETER:

POWER: AC 90-240V 50Hz/60Hz
LIGHT SOURCE: 12x3w LED R4,B4,G4
POWER CONSUMPTION: 120W
STROBE: 1-20time/second
6standard DMX512 channels
Feature: 3different fire color,adjustable, Flash,Built-in programs
Control Mode: telecontrol mode, DMX512 signal control mode, master-slave control mode (Multiple simultaneous)
procedures with self-propelled
Working environment: indoor -20°C-40°C
Expected useful life: 10000hours
According to various kinds of safety standards, IP20 protect grade
As well as the stage, multi-functional studio and disco, wedding ceremony.
FIXTURE DIMENSION: L530×265×335(mm)
PACKING DIMENSION: L590×330×400(mm)
NET WEIGHT: 11KG
GROSS WEIGHT: 13KG

TX-500

LED火焰灯

◎技术参数:

工作电压: AC200-240V 50Hz/60Hz
光源: 20X3W RGB 3合一 LED
功率: 200W
频闪: 1-20次/秒
16个标准DMX512通道
火焰高度: 1.5米
火焰宽度: 0.6米
特点: 多彩火焰效果, 梦幻火焰颜色动感变化, 颜色变化, 速度可调, 颜色设有频闪功能
控制模式: 遥控模式, DMX512信号模式, 主从控制模式(多台同步)带自走程序
工作环境: 室内0°C-40°C
预计使用寿命: 10000小时
符合各种安全保护, Ip20保护等级;
适用于舞台、广告宣传、展览会等场合
灯具尺寸: 长710×宽300×高340(mm)
包装尺寸: 长780×宽370×高440(mm)
净重: 15公斤
毛重: 17公斤

◎ TECHNICAL PARAMETER:

POWER: AC 200-240V 50Hz/60Hz
LIGHT SOURCE: 20x3w RGB 3IN1 LED
POWER CONSUMPTION: 200W
STROBE: 1-20time/second
16standard DMX512 channels
Flame height 1.5M
Flame width 0.6M
Feature: colorful flame effect, fire color,adjustable, Flash,Built-in programs
Control Mode: telecontrol mode, DMX512 signal control mode, master-slave control mode (Multiple simultaneous)
procedures with self-propelled
Working environment: indoor 0°C -40°C
Expected useful life: 10000hours
According to various kinds of safety standards, IP20 protect grade
As well as the stage, exhibition ,advertising.
FIXTURE DIMENSION: L710x300x340(mm)
PACKING DIMENSION: L780x370x440(mm)
NET WEIGHT: 15KG
GROSS WEIGHT: 17KG

◎技术参数:

工作电压: AC200-240V 50Hz/60Hz
光源: 36X3W RGB 3合一 LED
功率: 200W
频闪: 1-20次/秒
14个标准DMX512通道
火焰高度: 1.5米
特点: 圆型立体火焰效果, 梦幻火焰颜色动感变化, 颜色变化, 速度可调, 颜色设有频闪功能
控制模式: 遥控模式, DMX512信号模式, 主从控制模式(多台同步)带自走程序
工作环境: 室内0°C-40°C
预计使用寿命: 10000小时
符合各种安全保护, Ip20保护等级;
适用于舞台、广告宣传、展览会、多功能演艺厅及迪斯科等场合。
灯具尺寸: 长440×宽440×高360(mm)
包装尺寸: 长490×宽490×高410(mm)
净重: 12公斤
毛重: 14公斤

◎ TECHNICAL PARAMETER:

POWER: AC 200-240V 50Hz/60Hz
LIGHT SOURCE: 36x3w RGB 3IN1 LED
POWER CONSUMPTION: 200W
STROBE: 1-20time/second
14standard DMX512 channels
Flame height: 1.5M
Feature: Circles 3D flame effect, fantastic fire color,adjustable, Flash,Built-in programs
Control Mode: telecontrol mode, DMX512 signal control mode, master-slave control mode (Multiple simultaneous)
procedures with self-propelled
Working environment: indoor 0°C-40°C
Expected useful life: 10000hours
According to various kinds of safety standards, IP20 protect grade
As well as the stage, multi-functional studio and disco, exhibition ,advertising.
FIXTURE DIMENSION: L350×350×290(mm)
PACKING DIMENSION: L400×400×340(mm)
NET WEIGHT: 12KG
GROSS WEIGHT: 14KG

◎ 3D Led Flame Lights

TX-200H

立体梦幻LED火焰灯

无线系统连接图 3

