

SKYSTAR



广州亮星灯光科技有限公司

SKYSTAR LIGHTING LIMITED

地址：中国 广东 广州市天河区 龙洞迎龙大道260号龙山工业园E-1栋二层
电话：020-87022418
传真：020-87023011
移动电话：13602863513 13609702481
网址：www.lightskystar.com
电子邮箱：vinca2004@126.com, 1843755954@qq.com, 623872311@qq.com, 1725113820@qq.com, 1284963471@qq.com

Add: 2F., Building E-1, Longshan industry Park, No.260 Yinglong RD., Longdong,
Tianhe District, Guangzhou China.
Web site: www.lightskystar.com
E-mail: vinca2004@126.com, 1843755954@qq.com, 623872311@qq.com, 1725113820@qq.com, 1284963471@qq.com
Tel: +8620-87022418
Fax: +8620-87023011
cellphone: +86 13609702481 (NIKI)
Whatsapp: +86 13602863513 (Jack)
+86 18902251183 (Lily)



广州亮星灯光科技有限公司

SKYSTAR LIGHTING LIMITED

SKYSTAR

400W Follow Spot Light
400W LED 追光灯

LED



FS-400M



TECHNICAL PARAMETER:


Power: AC 100-240V 50HZ/60HZ
 Light source: 400W LED
 Power consumption: 450W
 Beam angle: 3°-12° adjustable
 zoom: 6-15° adjustable
 Cast distance 60-70 meters
 Color: 6 colors+open
 CTO 3200K-7500K stepless adjustable
 Strobe 1/20sec -2 SEC adjustable
 Dimmer: 0-100% adjustable
 High brightness: 20M/4300LUX
 Control mode: electronic push button/DMX512 control
 Cooling system: convection cooling-fan, optimize internal air duct way, heat elimination rapidly
 IP grade: Ip20
 According to various kinds of safety standards, Light weight, easily use As well as the stage, multi-functional studio and disco, wedding ceremony.
 FIXTURE DIMENSION: L890×W290×H290(mm)
 PACKING DIMENSION: L930×W330×H340(mm)
 Net weight: 15kgs
 Gross weight: 17kgs

FS-400M >>光效图

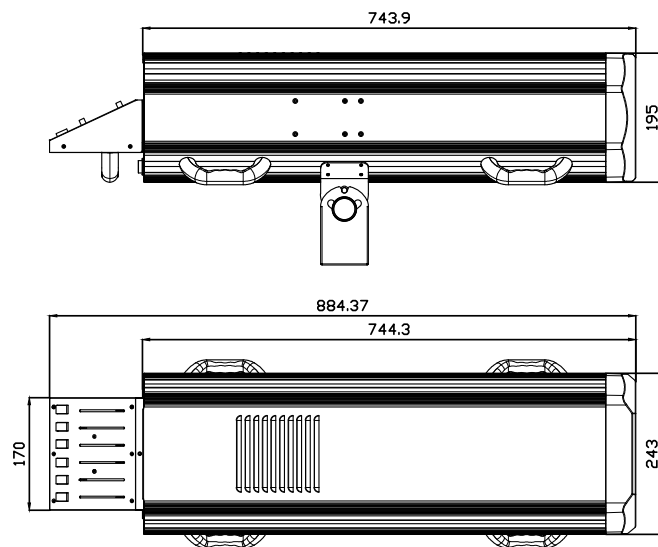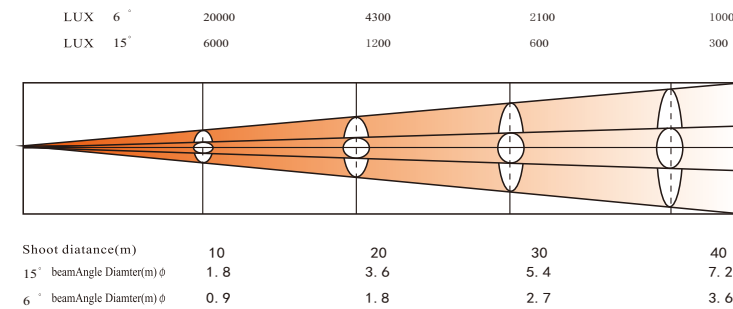

技术参数:

电源: AC 100-240V 50HZ/60HZ
 光源: 400W LED
 功耗: 450w
 光束角度: 3° -12° 可调
 变焦: 6 - 15° 可调
 投掷距离: 60-70米
 颜色: 6种颜色+白光可调
 CTO 3200K-7500K 无极可调
 频闪1/20秒-2秒可调
 调光: 0 - 100%
 高亮度: 20 m / 4300LUX
 控制方式: 电子推送. 按钮/ DMX512控制
 冷却系统: 轴流风扇致冷, 内部优化风路设计, 散热充分良好.
 IP等级: Ip20
 根据各种安全标准, 重量轻, 使用方便可以用于舞台、多功能演播室和迪斯科舞厅, 婚礼仪式等多种场合。
 产品尺寸: L890×W290×H290 (mm)
 包装尺寸: L930×W330×H340 (mm)
 净重: 15公斤
 毛重: 17公斤

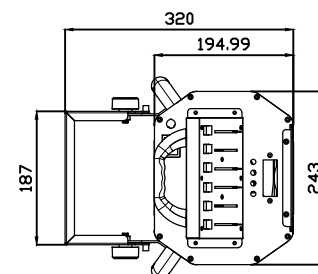

LED

400W Follow Spot Light
400W LED 追光灯

FS-400X





TECHNICAL PARAMETER:

Power: AC 100-240V 50HZ/60HZ
 Light source: 400W LED
 Power consumption: 450W
 Beam angle: 3°-12° adjustable
 zoom: 6-15° adjustable
 Cast distance 60-70 meters
 Color: 6colors+open
 Dimmer: 0-100% adjustable
 High brightness: 20M/4300LUX
 Manual control, very easy to use
 Cooling system: convection cooling-fan, optimize internal air duct way, heat elimination rapidly
 IP grade: Ip20
 According to various kinds of safety standards, Light weight, easily use As well as the stage, multi-functional studio and disco, wedding ceremony.
 FIXTURE DIMENSION: L790×W290×H290(mm)
 PACKING DIMENSION: L845×W330×H335(mm)
 Net weight: 12.5kgs
 Gross weight: 14.5kgs

技术参数:

电源: AC 90-240V 50HZ/60HZ
 光源: 400W LED
 功耗: 450w
 光束角度: 3° -12° 可调
 变焦: 6 - 15° 可调
 投掷距离: 60-70米
 颜色: 6种颜色+白光可调
 调光: 0 - 100%
 高亮度: 20 m / 4300LUX
 控制方式: 手动控制
 冷却系统: 轴流风扇致冷, 内部优化风路设计, 散热充分良好.
 IP等级: Ip20
 根据各种安全标准, 重量轻, 使用方便可以用于舞台、多功能演播室和迪斯科舞厅, 婚礼仪式等多种场合。
 产品尺寸: L790×W290×H290 (mm)
 包装尺寸: L845×W330×H335 (mm)
 净重: 12.5公斤
 毛重: 14.5公斤

FS-400X >>光效图

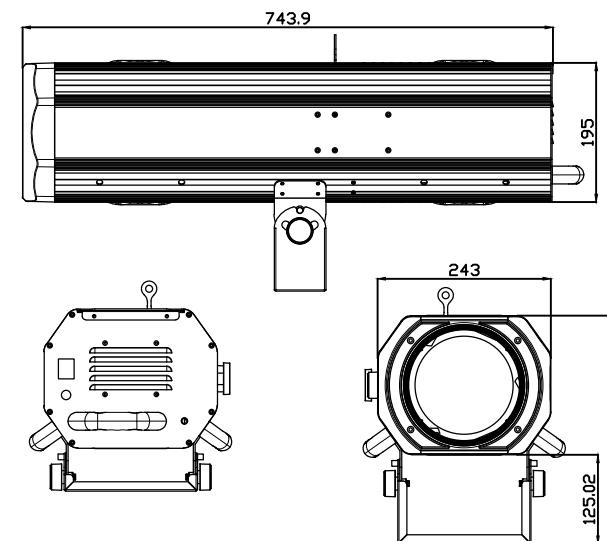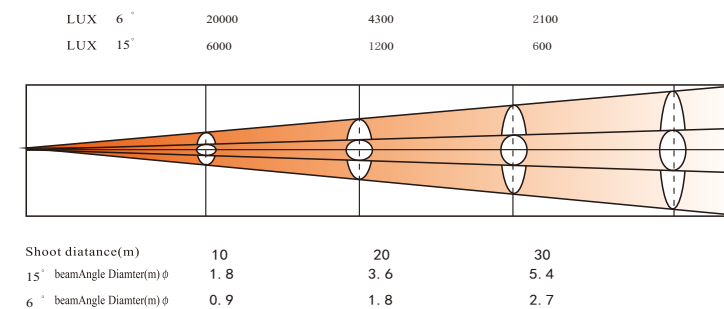

SKYSTAR

FS-1200M

1200W Follow Spot Light

1200W LED 追光灯

LED





TECHNICAL PARAMETER:

Operating voltage: AC90-240V 50Hz/60Hz
Light source: 1200W LED module
Power: 1300W
Zoom angle: 3-12 degrees adjustable
Aperture angle: 2-15 degrees adjustable
Projection distance: 300-800 meters
Color: 6 colors+ white
CTO color temperature correction: 3200-6000K stepless adjustment
Illumination: 80M/1800LUX, 20M/28000LUX
Effective luminous flux: 38000 lm
DMX512, fully functional electronic control panel
Revolutionary light sources and optical systems make it become the most bright efficient LED follow spot light
The illumination is comparable to any professional follow spot light
Suitable for large-scale stage, outdoor performances and other occasions.
Fixture size: 1040 × 350 × 320 (mm)
Flightcase packaging (including stand) size: 1190 × 600 × 730 (mm)
Net weight: 31.5 kg
Gross weight: 68 kg (including flightcase and stand)

技术参数:

工作电压: AC90-240V 50Hz/60Hz
光源: 1200W LED 模组
功率: 1300W
变焦角度: 3° 至 12° 可调
光圈角度: 2° 至 15° 可调
投射距离: 300-800 米 (根据环境亮度)
颜色: 6 种颜色+白光
CTO 色温校正: 3200-6000K 三级调节
照度: 80M/1800LUX, 20M/28000LUX
有效光通量: 38000lm (全焦段)
DMX512, 全功能电控面板
革命化光源和光学系统使其成为光效最强 LED 追光灯
照度媲美任何专业追光灯
适用于大型舞台、户外表演等场合。
灯具尺寸: 长 1040×宽 350×高 320 (mm)
航空箱包装 (含支架) 尺寸: 长 1190×宽 600×高 730 (mm)
净重: 31.5 公斤
毛重: 68 公斤 (含航空箱和支架)

FS-1200 >>光效图

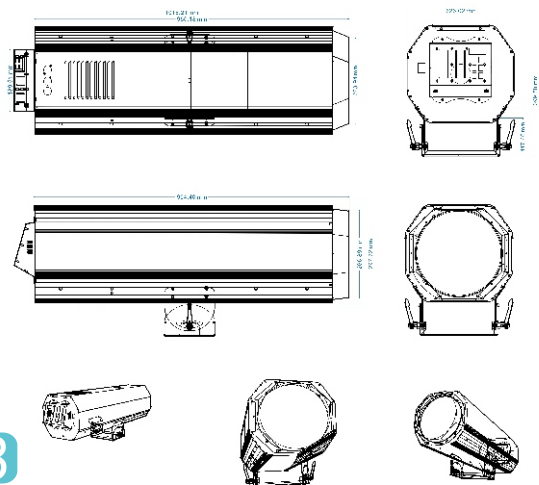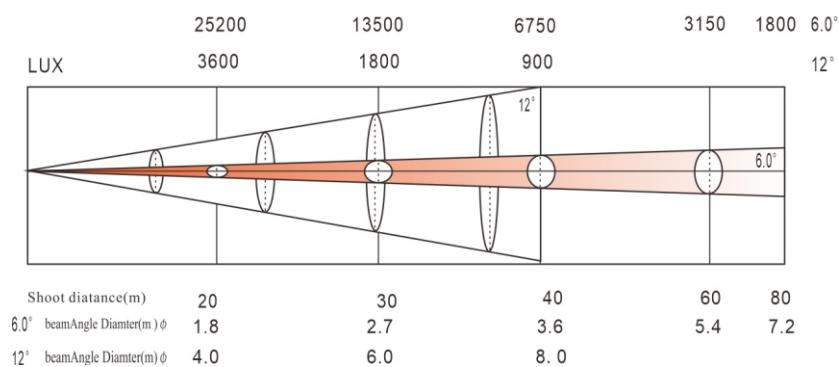

SKYSTAR

LED

600W Follow Spot Light

600W LED 追光灯

FS-4500





技术参数:


工作电压: AC90-240V 50Hz/60Hz
光源: LED 模组
功率: 600W
变焦角度: 3° 至 12° 可调
光圈角度: 2° 至 12° 可调
投射距离: 200-300米
颜色: 6种颜色++白光
CTO色温校正: 3200-7500K无极调节
照度: 80M/2000LUX
有效光通量: 20000 lm
光学系统手动控制, 功能电控面板
革命化光源和光学系统使其成为光效最强LED 追光灯照度媲美任何专业追光灯
适用于大型舞台、户外表演等场合。
灯具尺寸: 长990×宽350×高320 (mm)
航空箱包装 (含支架) 尺寸: 长1140×宽600×高730 (mm)
净重: 35 公斤
毛重: 68 公斤 (含航空箱和支架)

TECHNICAL PARAMETER:

Operating voltage: AC90-240V 50Hz/60Hz
Light source: LED module
Power: 600W
Zoom angle: 3-12 degrees adjustable
Aperture angle: 2-12 degrees adjustable
Projection distance: 200-300 meters
Color: 6 colors+ white
CTO color temperature correction: 3200-7500K stepless adjustment
Illumination: 80M/2000LUX
Effective luminous flux: 20000 lm
Optical system manual control, functional electronic control panel
Revolutionary light sources and optical systems make it become the most bright efficient LED follow spot light
The illumination is comparable to any professional follow spot light
Suitable for large-scale stage, outdoor performances and other occasions.
size: 990 × 350 × 320 (mm)
Flightcase packaging (including stand) size: 1140 × 600 × 730 (mm)
Net weight: 35 kg
Gross weight: 68 kg (including flightcase and stand)

FS-4500 >>光效图

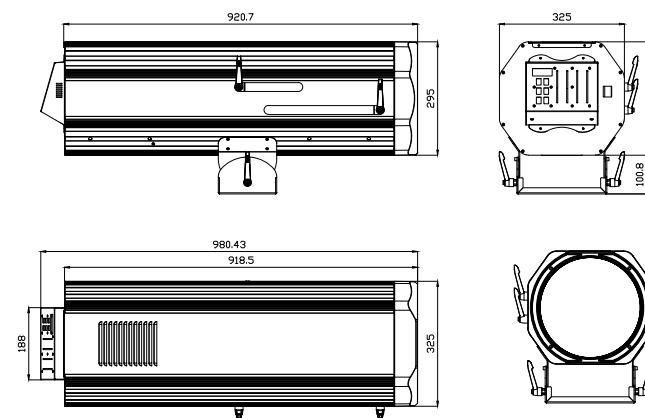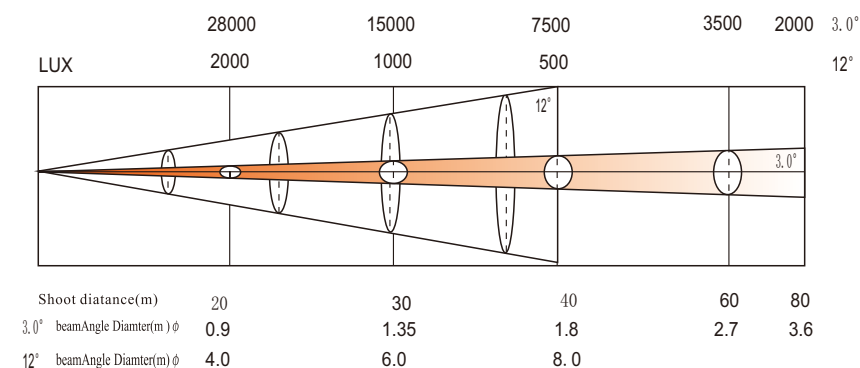

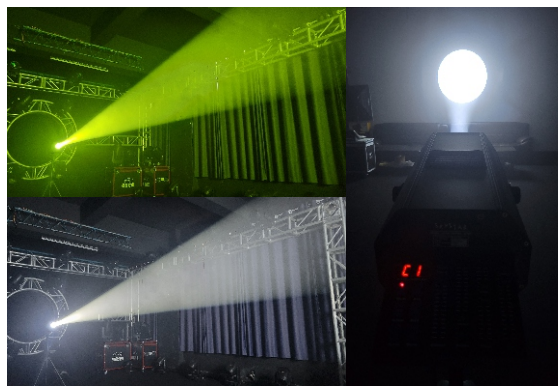

300W/400W Follow Spot Light

300W / 400W LED 追光灯

LED

技术参数:

工作电压: AC100-240V 50Hz/60Hz
光 源: 400W LED / 300W LED
功 率: 430W / 400W
光斑角度: 3°至 15°可调
投射距离: 40-50 米
轻便,亮度度(超越传统 1200W 追光灯亮度)
●5 种颜色+白光, 彩虹效果
●控制方式: 手动控制
●轴流风扇致冷, 内部优化风路设计, 散热充分良好;
●符合各种安全保护, Ip20 保护等级;
●适用于舞台、婚庆、多功能演艺厅及迪斯科等场所。
灯具尺寸: 长 525×宽 245×高 225(mm)
包装尺寸: 长 645×宽 290×高 275(mm)
净 重: 8.5 公斤
毛 重: 9.5 公斤
可订制拉杆航空箱, 轮子拆卸方便。
航空箱尺寸: 45x35x78 (cm)
航空箱重量: 12.6kg

TECHNICAL PARAMETER:

Voltage: AC100-240V, 50Hz/60Hz
Light source: 400W LED / 300W LED
Power: 430 W / 400W
Beam Angle: adjustable from 3°to 15°
Cast distance: 40-50 m
Lightweight, high brightness(Beyond the brightness of traditional 1200W pursuit lights)
●5 colors + white,rainbow Effect
●Control method: Manual Control
●Convection cooling-fan, optimize internal air duct way, heat elimination rapidly
●According to various kinds of safety standards, IP protect grade.
●Suitable for stage, wedding, multi-function performance hall and disco etc.
Fixture size: L525×W245×H225(mm)
Carton size: L645×W290×H275(mm)
Net weight: 8.5kg
Gross weight: 9.5kg
Customizable trolley flightcase with convenient wheel disassembly.
Flightcase size: 45 x 35 x 78 (cm)
Flightcase weight: 12.6kg



LED

300/400W Follow Spot Light

300 / 400W LED 追光灯

技术参数:

工作电压: AC100-240V 50Hz/60Hz
光 源: 400W LED / 300W LED
功 率: 430W / 400W
光斑角度: 3°至 15°可调
投射距离: 40-50 米
轻便,亮度度(超越传统 1200W 追光灯亮度)
●5 种颜色+白光, 彩虹效果
●控制方式:电子推送.按钮/ DMX512 控制
●轴流风扇致冷, 内部优化风路设计, 散热充分良好;
●符合各种安全保护, Ip20 保护等级;
●适用于舞台、婚庆、多功能演艺厅及迪斯科等场所。
灯具尺寸: 长 605×宽 245×高 225(mm)
包装尺寸: 长 665×宽 290×高 270(mm)
净 重: 10.5 公斤
毛 重: 12 公斤可订制拉杆航空箱, 轮子拆卸方便。
航空箱尺寸: 42x35x78(cm)
航空箱重量: 12.5kg

TECHNICAL PARAMETER:


Voltage: AC100-240V, 50Hz/60Hz
Light source: 400W LED / 300W LED
Power: 430 W / 400W
Beam Angle: adjustable from 3°to 15°
Cast distance: 40-50 m
Lightweight, high brightness(Beyond the brightness of traditional 1200W pursuit lights)
●5 colors + white,rainbow Effect
●Control method: electronic push button/DMX512 control
●Convection cooling-fan, optimize internal air duct way, heat elimination rapidly
●According to various kinds of safety standards, IP protect grade.
●Suitable for stage, wedding, multi-function performance hall and disco etc.
Fixture size: L605×W245×H225(mm)
Carton size: L665×W290×H270(mm)
Net weight: 10.5kg
Gross weight:12kg
Customizable trolley flightcase with convenient wheel disassembly.
Flightcase size: 42 x 35 x 78 (cm)
Flightcase weight: 12.5kg

SKYSTAR

SHADOW-300MR/400MR



Rotating gobos

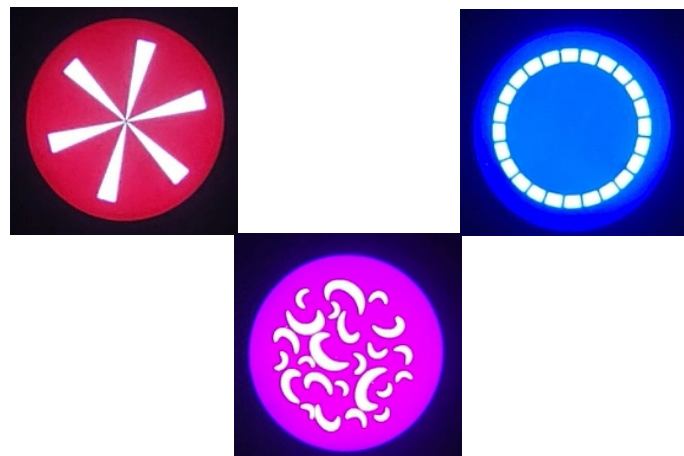

300W/400W Follow Spot Light

300W / 400W LED 追光灯

LED

技术参数:

工作电压: AC100-240V 50Hz/60Hz
光源: 300W LED / 400W LED
功率: 400W / 430W
光斑角度: 3°至 15°可调
投射距离: 40-50 米
轻便,亮度度(超越传统 1200W 追光灯亮度)
颜色盘: 5 种颜色+白光, 彩虹效果
图案盘: 3 个自转图案+白光
控制方式: 电子推送.按钮/ DMX512 控制
轴流风扇致冷, 内部优化风路设计, 散热充分良好;
符合各种安全保护, Ip20 保护等级;
适用于舞台、婚庆、多功能演艺厅及迪斯科等场合。
灯具尺寸: 长 605×宽 245×高 225(mm)
包装尺寸: 长 665×宽 290×高 270(mm)
净重: 10.5 公斤
毛重: 12 公斤
可订制拉杆航空箱, 轮子拆卸方便。
航空箱尺寸: 42x35x78(cm)
航空箱重量: 12.5kg

TECHNICAL PARAMETER:

Voltage: AC100-240V, 50Hz/60Hz
Light source: 300W LED /400W LED
Power: 400W/430W
Beam Angle: adjustable from 3° to 15°
Cast distance: 40-50 m
Lightweight, high brightness(Beyond the brightness of traditional 1200W pursuit lights)
Color wheel: 5 colors + open, rainbow Effect
1 Rotating gobo wheel : 3 rotating gobos + open
Control method: electronic push button/DMX512 control
Convection cooling-fan, optimize internal air duct way, heat elimination rapidly
According to various kinds of safety standards, IP protect grade.
Suitable for stage, wedding, multi-function performance hall and disco etc.
Fixture size: L605×W245×H225 (mm)
Carton size: L665×W290×H270 (mm)
Net weight: 10.5kg
Gross weight: 12kg
Customizable trolley flightcase with convenient wheel disassembly.
Flightcase size: 42 x 35 x 78 (cm)
Flightcase weight: 12.5kg

SKYSTAR

LED

350/380/440W Follow Spot Light

350 / 380 / 440 W LED 追光灯


F-350/380/440



>>光效图 F-380

LUX 6°	60000	15000	8000	4000
LUX 15°	10000	2500	1300	800

Shoot distance(m)	10	20	30	40
15° beamAngle Diameter(m) φ	1.8	3.6	5.4	7.2
6° beamAngle Diameter(m) φ	0.9	1.8	2.7	3.6

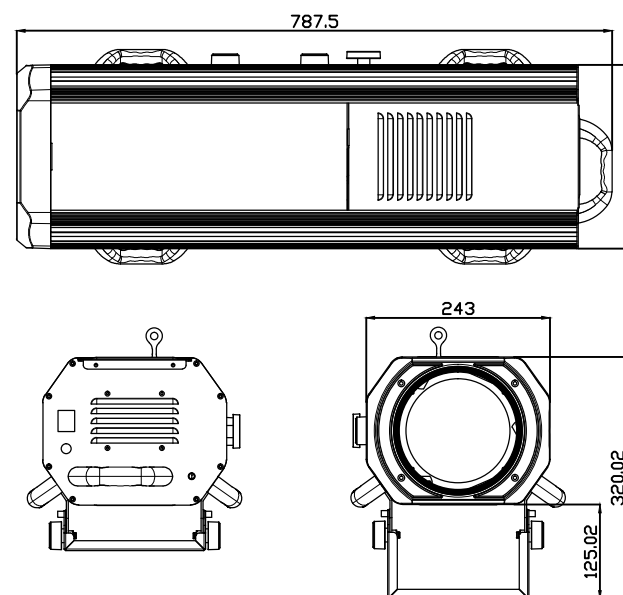

TECHNICAL PARAMETER:

Voltage: AC100-240V 50Hz/60Hz
Light source: MSD 350/380/440W
Power: 380W/410W/470W
Beam angle: 3 to 15 degrees adjustable
Cast distance: 80-100 meters
5colors+open, adjustable, zoomable.
Lightweight, high brightness, 20M/10000-15000LUX
(centre value)
Manual control, very easy to use
Convection cooling-fan, optimize internal air duct way, heat elimination rapidly
Conforms to a variety of security protection, Ip20 protection level
Suitable for stage, wedding, multi-functional performance hall and disco and other occasions.
size: L790 × W290 × H290 (mm)
Packing dimension: L845×W330×H335(mm)
Net weight: 12 kg
Gross weight: 14 kg

技术参数:

工作电压: AC100-240V 50Hz/60Hz
光源: MSD 350/380/440W
功率: 380W/410W/470W
光斑角度: 3°至 15°可调
投射距离: 80-100米
5种颜色+白光, 可调光, 可变焦。
轻便,亮度高 20M/10000-15000LUX (中心)
手动控制, 直观易用
轴流风扇致冷, 内部优化风路设计, 散热充分良好; 符合各种安全保护, Ip20保护等级;
适用于舞台、婚庆、多功能演艺厅及迪斯科等场合。
灯具尺寸: 长790×宽290×高290 (mm)
包装尺寸: 长845×宽330×高335 (mm)
净重: 12 公斤
毛重: 14 公斤

